

U-matic.


VIDEOCASSETTE RECORDER

7963

# V0-5600

Revised-4

This manual includes the informations of Supplement-1, 2 and 3 that have been published already.

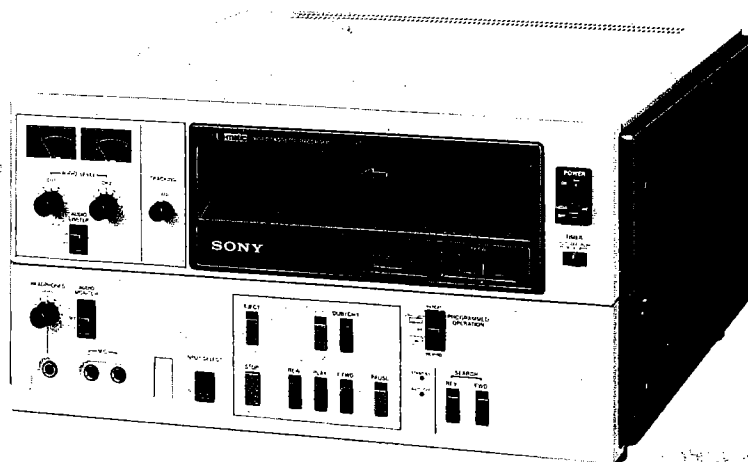

# SONY®

## SERVICE MANUAL

# SPECIFICATIONS

## GENERAL

Video recording Rotary two-head helical scan system  
Luminance: fm recording  
Color signal: converted subcarrier direct recording  
Video signal system EIA standards, NTSC color  
Power requirements 120 V ac  $\pm 10\%$ , 50/60 Hz  $\pm 10\%$   
Power consumption 65 W  
Operating position Horizontal  
Storage temperature  $-20^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $+140^{\circ}\text{F}$ )  
Operating temperature  $5^{\circ}\text{C}$  to  $40^{\circ}\text{C}$  ( $41^{\circ}\text{F}$  to  $104^{\circ}\text{F}$ )  
Dimensions Approx.  $446 \times 237 \times 516$  mm (w/h/d)  
( $17\frac{7}{8} \times 9\frac{3}{8} \times 20\frac{3}{8}$  inches)  
including projecting parts and controls  
Weight Approx. 23 kg (50 lb 12 oz)

## VIDEO

### Input

VIDEO IN BNC type,  $\times 1$   
 $1.0\text{ V (p-p)} \pm 0.5\text{ V (p-p)}$ , 75 ohms, unbalanced,  
sync negative  
TV 8 pin,  $\times 1$

### Output

VIDEO OUT BNC type,  $\times 1$   
 $1.0\text{ V (p-p)} \pm 0.2\text{ V (p-p)}$ , 75 ohms, unbalanced,  
sync negative  
TV 8 pin,  $\times 1$

### Horizontal resolution

Monochrome mode: 320 lines  
Color mode: 240 lines

### Signal-to-noise ratio

Monochrome mode: more than 47 dB  
Color mode: more than 45 dB

Recording level Automatic

## AUDIO

### Input

LINE CH-1, CH-2 IN

Phono jack,  $\times 1$  in each  
-10 dB, 47 k ohms

MIC CH-1, CH-2 Phono jack,  $\times 1$  in each

-60 dB, for 600 ohm microphones

TV 8 pin,  $\times 1$

### Output

LINE CH-1, CH-2 OUT

Phono jack,  $\times 1$  in each  
-5 dB (with 47 k ohm load)

AUDIO MONITOR Mini jack,  $\times 1$

-5 dB (with 47 k ohm load)

HEADPHONES Stereo phone jack,  $\times 1$

for 8 ohm headphones  
Level: adjustable (-24 dB to -46 dB)

TV 8 pin,  $\times 1$

### Signal-to-noise ratio

Better than 48 dB (at 3% distortion)

Both channels 1 and 2

### Frequency response

50 - 15,000 Hz (channels 1 and 2)

### Recording level adjustment

Manual, with audio limiter

## SPECIAL FUNCTIONS

Pause A still picture is obtained,  
with automatic long pause function

Search Possible (about 5 times of normal speed in  
forward and reverse directions)

Tracking control Possible

Skew control Possible

Sync system Internal and external

### Dropout compensator

Internal

## TAPE TRANSPORT

Tape speed 9.53 cm/sec ( $3\frac{3}{4}$  ips)  
Recording or playback time 60 min (with KCA-60)  
Fast forward and rewind time within 4 min (with KCA-60)  
Wow and flutter 0.2% RMS  
Tape compatibility U-matic video cassette tape  
Usable tape KCA, KCS type tape

## RECOMMENDED VIDEO EQUIPMENT AND ACCESSORIES

Color Video Monitor Sony CVM and PVM series  
Color Video Camera Sony DXC series  
Auto Search Control RX-353, RX-303  
Remote Control Unit RM-500,  
Cleaning Cassette KC-1C  
Remote Control Cable RCC-5F  
Monitor Connecting Cable VMC-3P (3 m), VMC-5P (5 m), VMC-10P (10 m)  
Video Responder System VRC-100, VRS-110, VRD-100, VRP-100  
RF kit RFK-634  
Multi Remote Control Unit RM-555  
Video and Audio Signal Distributor DA-500  
Video and Audio Switcher VCS-500  
VTR Selector RM-V5

# TABLE OF CONTENTS

## 1. GENERAL DESCRIPTION

1-1.	Features	1-1
1-2.	Note on Videocassette Tape	1-1
1-3.	Location and Function of Controls	1-2
1-4.	Connections and Select SW Setting	1-4
1-5.	To Dub Audio	1-6
1-6.	To See a Picture on a TV Receiver	1-7
1-7.	Timer Operation	1-8
1-8.	Programmed Operation	1-9
1-9.	Auto Search Control	1-9

## 2. SERVICE INFORMATION

2-1.	Disassembly of Cabinet	2-1
2-2.	Cassette-Up Compartment Removal and Installing Procedures	2-2
2-3.	Main Parts Location	2-3
2-3-1.	Location of the Printed Circuit Boards	2-3
2-3-2.	Location of the Mechanical Main Parts/Components	2-5
2-4.	Spare Parts	2-7
2-5.	Machine Position for Repair Work	2-7
2-6.	Cassette Removal Procedure when Normal Ejection is not Possible	2-7
2-7.	To Operate the Machine without Installing Cassette Tape	2-8
2-8.	Tape Slack Detector	2-8
2-9.	Fixture	2-8
2-10.	Printed Circuit Board	2-9
2-11.	Cassette-Up Compartment Operation	2-10
2-12.	Tape Tension Control Mechanism	2-11
2-13.	Timing of Switch, Motor and Solenoid	2-12

## 3. PERIODIC CHECK AND MAINTENANCE

3-1.	Maintenance After Repairs	3-1
3-2.	Periodic Check	3-1
3-3.	Others	3-1

## 4. REPLACEMENT OF MAJOR PARTS

4-1.	Replacement of Upper Drum Assembly	4-1
4-2.	Replacement of Drum Assembly	4-2
4-3.	Replacement of Capstan Motor	4-3
4-4.	Replacement of CTL PB Head	4-3
4-5.	Replacement of S Drawer Roller	4-4
4-6.	Replacement/Adjustment of Tape Guides on Threading Ring	4-5
4-7.	Adjustment Item Table After Main Parts Replacement	4-6

## 5. LINK AND DRIVE SYSTEM ALIGNMENT

5-1.	Reel Table System Adjustment	5-1
5-1-1.	Cassette Holder Position Adjustment	5-1
5-1-2.	Reel Table Height and Vertical Play Adjustment	5-1
5-2.	T Drawer Arm Adjustment	5-3
5-2-1.	T Drawer Arm Eject Position Adjustment	5-3
5-2-2.	Unthread-end Switch Position Adjustment	5-3
5-3.	Threading System Adjustment	5-4
5-3-1.	Threading Ring Rotation Adjustment	5-4
5-3-2.	Gear Box Position Adjustment	5-5
5-3-3.	Pinch Roller Self-Alignment Adjustment	5-6

5-3-4.	FR Detector Block Mounting Position Adjustment	5-7
5-4.	Pinch Lever Block Adjustment	5-8
5-4-1.	Pinch Lever Pre-set Adjustment	5-8
5-4-2.	Pinch Roller Pre-set Adjustment	5-9
5-4-3.	Pinch Solenoid Block Position Adjustment	5-10
5-5.	T Tape Sensor Position Adjustment	5-11
5-6.	Tension Arm System Adjustment	5-12
5-6-1.	S Drawer Roller Ass'y Limiter Adjustment	5-12
5-6-2.	T Tension Regulator Operating Position Adjustment	5-12
5-6-3.	S Tension Regulator Operating Position Adjustment	5-13
5-6-4.	Tension Detector Position Adjustment	5-14
5-7.	Solenoid System Adjustment	5-15
5-7-1.	Search Solenoid Mounting Position Adjustment	5-15
5-7-2.	Skew Solenoid Mounting Position Adjustment	5-16
5-7-3.	T Idler Solenoid Position Adjustment	5-17
5-7-4.	S Idler Solenoid Position Adjustment	5-18
5-7-5.	Pinch Solenoid Mounting Position Adjustment	5-19
5-7-6.	T Brake Solenoid Position Adjustment	5-19
5-7-7.	S Brake Solenoid Position Adjustment	5-20
5-8.	Cassette-up Compartment Adjustment	5-21
7-8-1.	Cassette-in Switch Position Adjustment	5-21
7-8-2.	Cassette-down Switch Position Adjustment	5-22
5-9.	Leaf Spring Position Adjustment	5-23
5-10.	Pinch Lever Right Angle Adjustment	5-24

## 6. BACK TENSION AND TORQUE ALIGNMENT

6-1.	Brake System Adjustment	6-1
6-1-1.	S Brake Torque Adjustment	6-1
6-1-2.	T Brake Torque Adjustment	6-2
6-1-3.	Rew Brake Torque Adjustment	6-3
6-2.	FF/REW Torque Adjustment	6-3
6-3.	FWD Torque Adjustment	6-4
6-4.	REV Torque Adjustment	6-5
6-5.	FF Back Tension Adjustment	6-6
6-6.	FWD Back Tension Adjustment	6-7

## 7. TAPE RUN ALIGNMENT

7-1.	FF/REW Modes Tape Path Adjustment	7-1
7-2.	T Correction Guide Slantness Adjustment	7-2
7-3.	FWD Mode Tape Path Adjustment (1)	7-2
7-4.	FWD Mode Tape Path Adjustment (2)	7-3
7-5.	REV Mode Tape Path Adjustment	7-3
7-6.	Tape Path Adjustment Around Pinch Roller	7-4
7-6-1.	Tape Wrinkle Remove Adjustment	7-4
7-6-2.	Pinch Roller Slantness Adjustment	7-4
7-7.	Tracking Adjustment	7-6
7-7-1.	Video Tracking Adjustment	7-6
7-7-2.	CTL PB Head Height/Azimuth/Zenith Adjustment	7-10
7-7-3.	Audio Head Height Adjustment	7-12
7-7-4.	Audio Head Zenith Adjustment	7-12
7-7-5.	Audio Head Azimuth Adjustment	7-13
7-7-6.	Audio Head Phase Adjustment	7-14
7-7-7.	Audio/CTL Head Position Adjustment	7-14
7-8.	Video Head Dihedral Adjustment	7-15

## 8. POWER SUPPLY AND SYSTEM CONTROL ALIGNMENT

8-1.	Reg +12 V Adjustment (Switching Regulator) . . . . .	8-1
8-2.	Reg +9 V Adjustment . . . . .	8-1
8-3.	Digital VCC +5 V Adjustment for Servo . . . . .	8-1
8-4.	Tape Sensor Balance Adjustment . . . . .	8-2

## 9. SERVO SYSTEM ALIGNMENT

9-1.	Audio/CTL Head Position Adjustment . . . . .	9-2
9-2.	Tracking Multi Adjustment . . . . .	9-2
9-3.	Capstan Free Speed Adjustment . . . . .	9-3
9-4.	Capstan STOP Servo Adjustment . . . . .	9-3
9-5.	Capstan SEARCH x 5 Speed Adjustment . . . . .	9-3
9-6.	Capstan FWD/REV Detector Adjustment . . . . .	9-4
9-7.	Drum AFC Bias Adjustment . . . . .	9-4
9-8.	Drum AFC Transient Adjustment . . . . .	9-5
9-9.	Drum Lock Phase Adjustment . . . . .	9-5
9-10.	Switching Position Adjustment . . . . .	9-6
9-11.	Reel Servo Adjustment . . . . .	9-6
9-11-1.	Still Speed Adjustment . . . . .	9-6

## 10. AUDIO SYSTEM ALIGNMENT

10-1.	PB Output Frequency Response Adjustment . . . . .	10-2
10-2.	Audio Level Control Setting/Meter Calibration Adjustment . . . . .	10-2
10-3.	PB Output Level Adjustment . . . . .	10-3
10-4.	Audio Bias, Erase Frequency Adjustment . . . . .	10-3
10-5.	Audio Bias Current Adjustment . . . . .	10-3
10-6.	Bias Trap Adjustment [Rec.] -1 . . . . .	10-4
10-7.	Audio Limiter Gain Adjustment . . . . .	10-4
10-8.	REC Level Adjustment . . . . .	10-4
10-9.	INSERT Bias Frequency Adjustment . . . . .	10-5
10-10.	PB Bias Trap Adjustment . . . . .	10-5
10-11.	Cross-Talk Cancel Adjustment . . . . .	10-5

## 11. VIDEO SYSTEM ALIGNMENT

11-1.	Playback RF Amplifier Adjustment . . . . .	11-2
11-1-1.	PB RF Frequency Response Adjustment . . . . .	11-2
11-1-2.	PB Y-RF Output Balance Adjustment . . . . .	11-3
11-1-3.	PB Y-RF Output Level Adjustment . . . . .	11-4
11-1-4.	PB Chroma-RF Output Balance Adjustment . . . . .	11-4
11-1-5.	PB Chroma-RF Output Level Adjustment . . . . .	11-5
11-2.	Y Amplifier Adjustment . . . . .	11-5
11-2-1.	Noise Canceller Adjustment . . . . .	11-5
11-2-2.	Drop-Out Sensitivity Level Adjustment . . . . .	11-6
11-2-3.	Carrier Balance Adjustment . . . . .	11-6
11-2-4.	White Clip Adjustment . . . . .	11-7
11-2-5.	Y Output Level Adjustment . . . . .	11-7
11-2-6.	Sync Tip Carrier Frequency Adjustment . . . . .	11-8
11-2-7.	FM Deviation Adjustment . . . . .	11-8
11-2-8.	False VD Adjustment . . . . .	11-9
11-2-9.	REC Y Phase Equalizer Adjustment . . . . .	11-9
11-2-10.	PB Y Phase Equalizer Adjustment . . . . .	11-10
11-3.	Chroma Amplifier Adjustment . . . . .	11-11
11-3-1.	DUB Video Bias Trap Adjustment . . . . .	11-11
11-3-2.	3.58 MHz Reference Oscillator Frequency Adjustment . . . . .	11-11
11-3-3.	APC 4.27 MHz Tuning Adjustment . . . . .	11-11
11-3-4.	Chroma Converter Balance Adjustment . . . . .	11-12
11-3-5.	Playback A.C.C. Burst Tuning Adjustment . . . . .	11-12
11-3-6.	PB A.C.C. Level Adjustment . . . . .	11-13

11-3-7.	VCO Frequency Level Adjustment . . . . .	11-13
11-3-8.	PB A.P.C. Gain Adjustment . . . . .	11-14
11-3-9.	REC Chroma Frequency Response Adjustment . . . . .	11-14
11-3-10.	Chroma Mix Level Adjustment . . . . .	11-15
11-3-11.	3.58 MHz Trap Adjustment . . . . .	11-15
11-4.	Record Amplifier Adjustment . . . . .	11-16
11-4-1.	Y-REC Current Frequency Response Adjustment . . . . .	11-16
11-4-2.	Y-REC Current Level Adjustment . . . . .	11-17
11-4-3.	Chroma-REC Current Level Adjustment . . . . .	11-17
11-5.	Y/Chroma Delay Time Adjustment . . . . .	11-18
11-5-1.	Y/C Delay Time Adjustment . . . . .	11-18

## 12. BLOCK DIAGRAMS AND TIMING CHARTS

Head Location . . . . .	12-1
Tape Pattern . . . . .	12-1
Frequency Allocation . . . . .	12-2
Circuit Function of the Printed Circuit Board . . . . .	12-3
Overall Block Diagram . . . . .	12-4
Video System Block Diagram . . . . .	12-6
Audio System Block Diagram . . . . .	12-9
Servo System Block Diagram . . . . .	12-12
Servo Timing Chart . . . . .	12-15

## 13. FLOW CHART

Video System Flow Chart . . . . .	13-1
Audio System Flow Chart . . . . .	13-3
Servo System Flow Chart . . . . .	13-4





## 14. PRINTED WIRING BOARD AND SCHEMATIC DIAGRAM

Location of Main Parts . . . . .	14-1
Semiconductor Electrodes . . . . .	14-3

### VIDEO

VO-9/(DS-14) . . . . .	14-9
------------------------	------

### AUDIO

AU-28 . . . . .	14-22
AH-3  . . . . .	14-27
EC-19  . . . . .	14-28
MI-5  . . . . .	14-29
HP-6  . . . . .	14-30
MC-14 . . . . .	14-29
DR-17 . . . . .	14-30

### SERVO

SV-44 . . . . .	14-33
-----------------	-------

### POWER

AC-26/AC-45 . . . . .	14-52
UR-01 --- PW-67/PW-68 . . . . .	14-53
DC-13 . . . . .	14-56
MR-8/MR-11A/FR-11/LM-9/PH-5/PT-9 . . . . .	14-57

### SYSTEM CONTROL

KY-21 . . . . .	14-61
-----------------	-------



PD-16A/SW-43/PH-4 . . . . .	14-65
CN-42/PH-5/SW-50/SW-46 . . . . .	14-68
CC-9/CC-10/CC-11 . . . . .	14-69
SY-75 . . . . .	14-70
FRAME . . . . .	14-89

## 15. SPARE PARTS AND FIXTURE

15-1. Parts Information . . . . .	15-1
15-2. Exploded View . . . . .	15-1
Supply Side Reel Chassis . . . . .	15-5
Take-up Side Reel Chassis . . . . .	15-7
Reel Chassis (bottom view) . . . . .	15-9
Tape Threading Block . . . . .	15-11
Supply and Take-up Threading Arms . . . . .	15-13
Drum Block and Capstan . . . . .	15-15
Erase Head Base and S Guard . . . . .	15-17
Pinch Lever and Pinch Solenoid . . . . .	15-19
Cassette-up Compartment . . . . .	15-21
Function Control . . . . .	15-23
Chassis (bottom view) . . . . .	15-25
Chassis (bottom view) . . . . .	15-27
Meter Panel . . . . .	15-29
Printed Circuit Boards . . . . .	15-31
Ornamental Panel . . . . .	15-33
Ornamental Panel (control panel) . . . . .	15-35
Switching Regulator (UR-01) . . . . .	15-37
15-3. Electrical Parts List . . . . .	15-38
15-4. Packing Material and Accessory (Supplied) . . . . .	15-58
15-5. Fixture (Optional) . . . . .	15-58

## SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

Check the metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

### LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

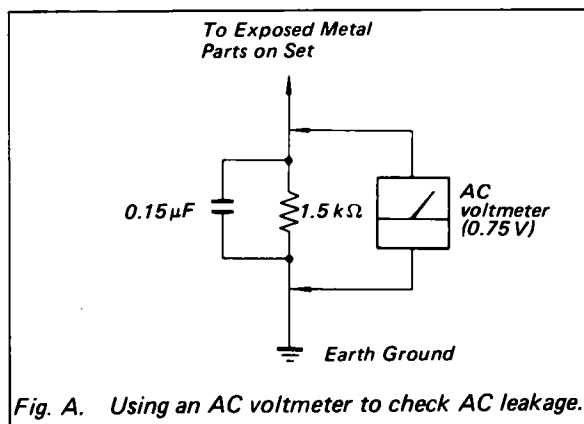


Fig. A. Using an AC voltmeter to check AC leakage.

# SECTION 1

## GENERAL DESCRIPTION

### 1-1. FEATURES

**Search operation:** Playback at about 5-times normal speed is possible in both forward and reverse directions.

**Programmed operation:** Program material from the beginning of the tape to the point at which the tape counter reads "000" can be played back repeatedly. It is also possible to stop the tape automatically at the "000" point.

**Still picture:** When the tape is stopped with the PAUSE button during playback, a still picture can be obtained. The guard band noise is limited to the upper or lower part of the screen so that the still picture is easy to see.

**Long pause mode:** When the tape is stopped in the pause mode for a long period of time, the machine automatically enters the long pause mode to avoid possible damage to the tape.

**Moisture detector:** When moisture condenses on the video head drum, the moisture detector is activated and the machine stops to avoid possible tape damage. The AUTO OFF indicator lights to indicate moisture condensation.

**Remote control and auto search:** The machine can be remotely controlled with an optional remote control unit. Any point on the tape can be searched for and played back automatically using an RX-353 or RX-303 Auto Search Control Unit.

**Logic control:** The logic control system allows you to change modes without pressing the STOP button.

**Full automatic rewind:** The tape is automatically rewound to the beginning when it runs to the end.

**Automatic control of video recording level:** The automatic gain control circuit maintains the proper video level, assuring optimum video recording.

**Limiter function:** The audio recording level is adjusted manually. The limiter circuit minimizes audio distortion at the program peaks.

**Two audio tracks:** Two audio tracks permits recording and playback of stereo sound or bilingual program material.

**Audio dubbing:** Audio (commentary, music, etc.) may be added to video recording made earlier.

**Timer operation:** With the aid of a timer (optional), recording and playback can be started and stopped when the recorder is unattended.


**Stable playback picture:** The servo system using a direct drive capstan motor and drum motor, and the newly developed digital servo IC assure a stable tape transport which reduces tape jitter.

**Rack mounting:** The VO-5600 is designed to be mounted in a 19-inch EIA standard rack.

**No power adaptation and low power consumption:** Thanks to Sony's newly-developed high efficiency switching regulator, the unit can be operated with a wide range of power voltages and frequencies without power adaptation. Power consumption is low.


### 1-2. NOTE ON VIDEO CASSETTE TAPE

The video and audio signals are recorded using the full width of the tape as shown below. Because of this, the tape cannot be recorded in the reverse direction.

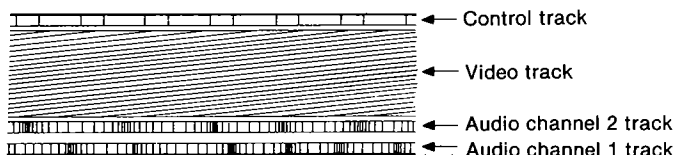


### THE RED BUTTON ON THE BOTTOM

If you want to safeguard the material recorded on a cassette, remove the red button on the bottom so it cannot be recorded even if the REC button is pressed. Accidental erasure is now impossible. If you later decide to record on this cassette, replace the button. If a cassette without a red button is inserted into the videocassette recorder, the E-to-E mode picture does not appear on the monitor screen.

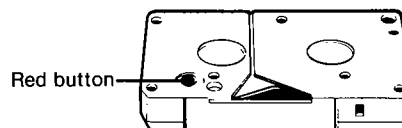


# 1-3. LOCATION AND FUNCTION OF CONTROLS

## FRONT PANEL


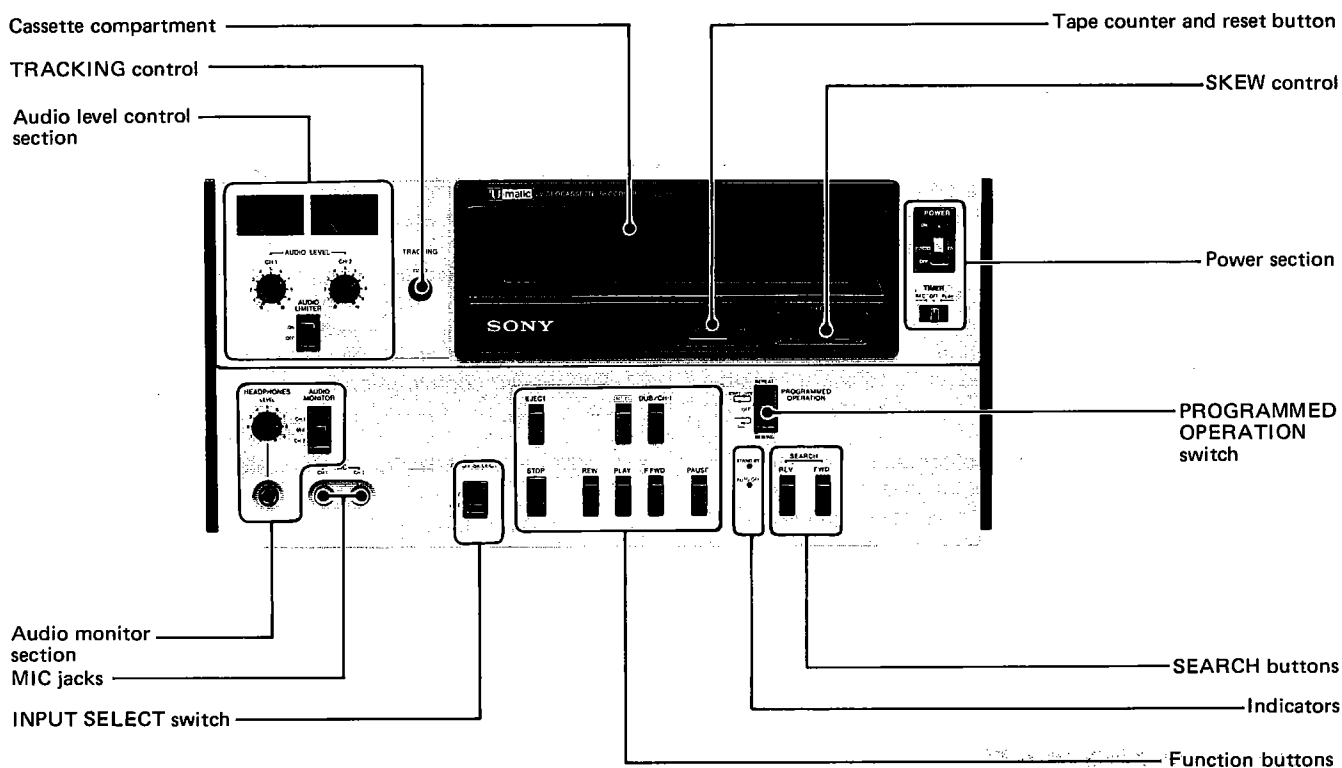


## To Put the Operation Panel on a Slant.

The lower half of the operation panel can be pulled out as shown below.




**To put the panel on a slant**  
While pulling the projections on the bottom of the operation panel out, swing the bottom of the panel out and up until the side braces lock.

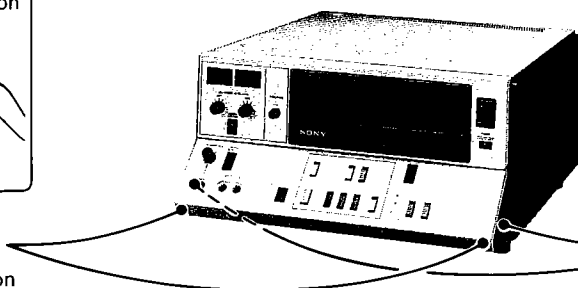

**To return the panel to the original position**  
Push up on the side braces to unlock them and swing the panel down and back until it clicks into place.


## REAR PANEL

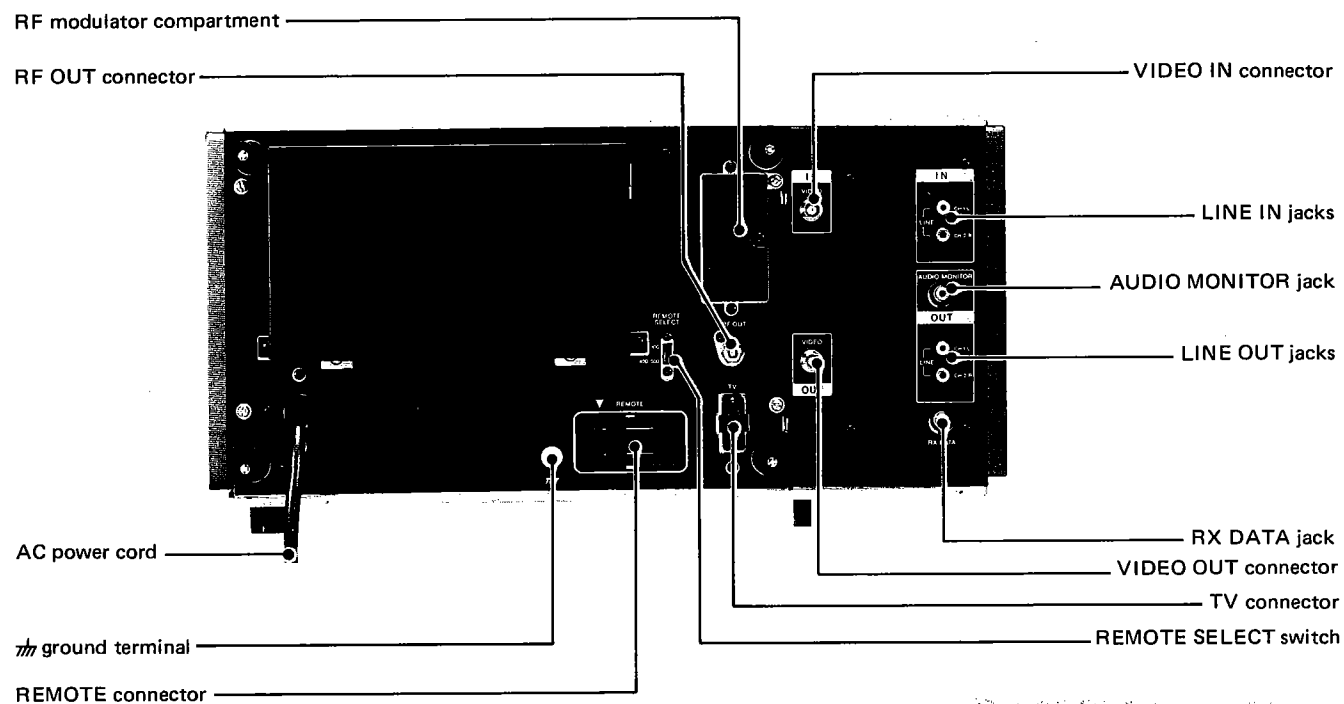

## 1-4. CONNECTIONS AND SELECT SW SETTING

### RF OUT connector (F type)

The output signal of the RF modulator, if it is inserted, is fed out here. Using this connector, you can see a picture on a conventional TV receiver.

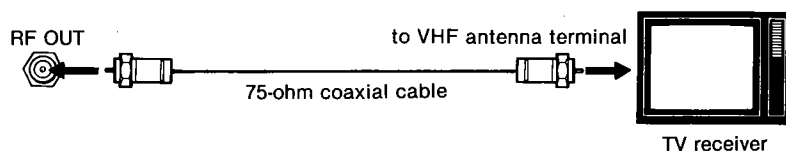


### RF modulator compartment

Insert an RF modulator\* (optional) here to see a picture on a conventional TV receiver.

\*An RF (Radio Frequency) modulator converts the signal to be fed to the TV receiver into the VHF channel 3 or 4 signal.


### VIDEO IN connector (BNC type)

Connect the video signal to be recorded to this connector.

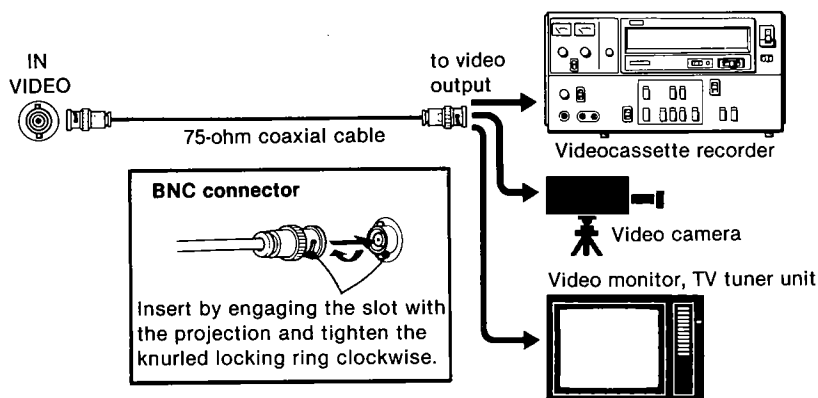


### LINE IN (audio line input) jacks (phono type)

Connect the audio signal to be recorded here.

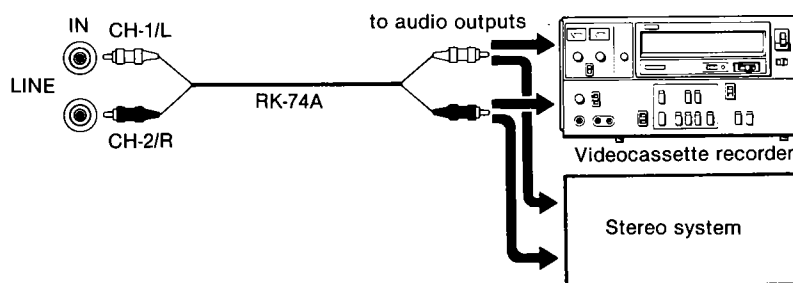


### AUDIO MONITOR jack (mini type)

Connect to the audio input jack on the video monitor. The signal selected by the AUDIO MONITOR switch on the front panel is output here.

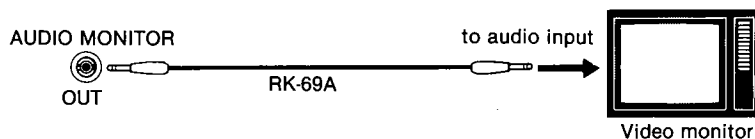


**LINE OUT (audio line output) jacks (phono type)**

The signals recorded on the audio channel 1 and audio channel 2 are output here.

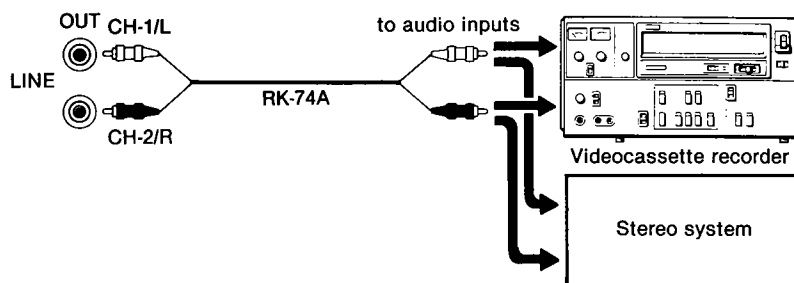**ground terminal**

To reduce hum in the audio signal, connect this terminal to a ground terminal of the connected audio equipment.


**REMOTE connector (33-pin)**

Connect an optional auto search control unit or remote control unit to this connector.

● Before connecting the remote control cable, check whether the connector is male or female.

● The REMOTE connector accepts a 20-pin connector. A plug adaptor is unnecessary.

● When a unit which is equipped with a 20-pin connector is connected to the REMOTE connector, do not use the REV button on the unit. If you do, the recorder will malfunction.

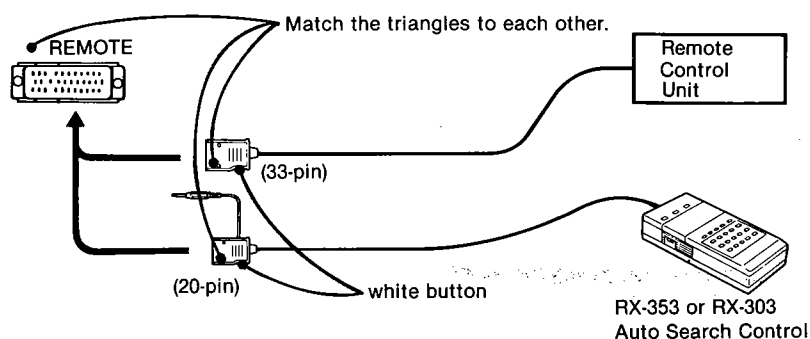

To disconnect the cable, press the white button on the connector and pull the connector out.

**REMOTE SELECT switch**

Set this switch depending on the type of the remote control unit or auto search control unit used.


300: When an RM-300, RX-303 or RX-353 is used.

400/500: When an RM-420, RM-555, RM-500 or RM-580 is used.


### TV connector (8-pin)

Connect to the 8-pin VTR connector of a video monitor.

The video and audio input and output connections can be made with a single cable. When this connector is used, the audio signal will be recorded on audio channel 2. The channel selected by the AUDIO MONITOR switch will be heard through the speaker on the video monitor.

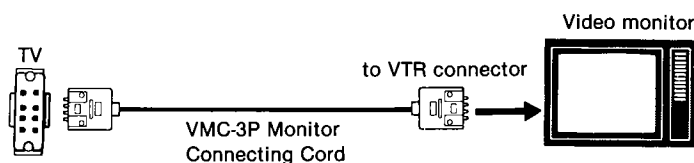


Be sure that the connectors are properly aligned before connecting the cable.



To remove, press the buttons on both sides of the connector.


### VIDEO OUT connector (BNC type)

The video signal is output here.

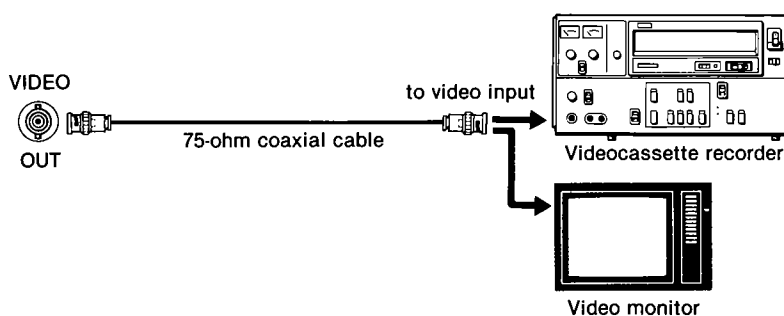


### RX DATA jack (mini type)

For recording the data and reading the data recorded on the tape by the RX-353.

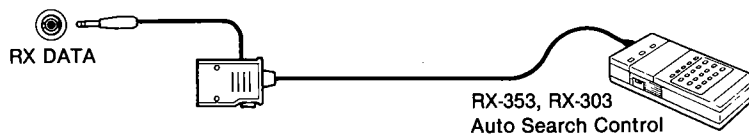

## 1-5. TO DUB AUDIO

You can add a sound such as music or commentary on the tape on which the video signal has already been recorded. The new sound is recorded on the audio channel 1, and when the new sound is recorded, the previous sound will be erased.

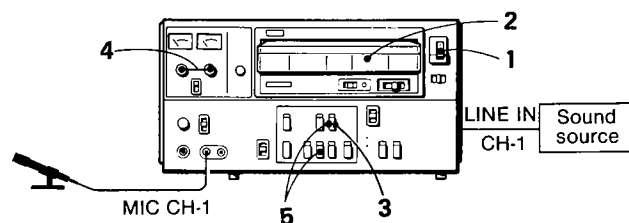

### Operation

1. Turn the power on.
2. Insert a recorded video cassette.
3. Press the DUB/CH-1 button.
4. Adjust the audio recording level.
5. Press the DUB/CH-1 and PLAY buttons simultaneously. The recorder enters the audio dubbing mode.

To stop dubbing, press the STOP button.

● If both a microphone and another audio source are connected simultaneously, only the sound from the microphone will be recorded.

● When a microphone is used, avoid pointing the microphone at the monitor or turn the sound volume on the monitor down, to prevent acoustic feedback (a whistle-like sound).

### To record sound on the middle of the tape

Play the tape to the point at which sound is to be added and press the PAUSE button to stop the tape momentarily. Press the DUB/CH-1 button, then the PAUSE button again. The recorder will enter the audio dubbing mode.




## 1-6. TO SEE A PICTURE ON A TV RECEIVER

A playback picture can be seen on a conventional TV receiver when an RF modulator (optional) is installed into the VO-5600.


It is, of course, possible to see a TV program as usual.

### CONNECTIONS

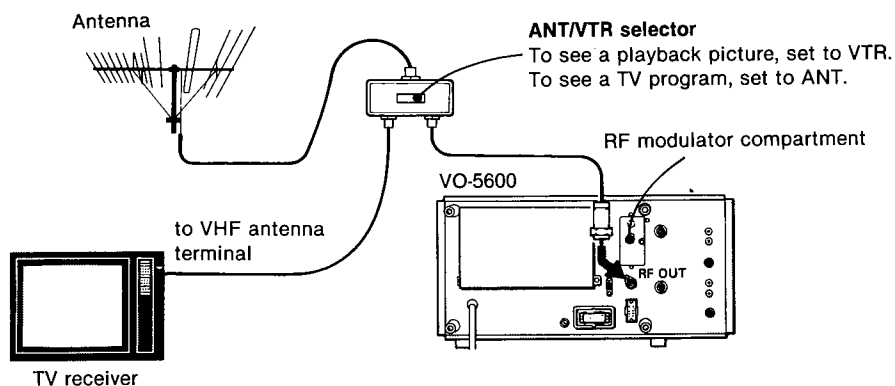


### INSTALLATION OF AN RF MODULATOR

1. Loosen the screw on the RF modulator compartment, and remove the lid.

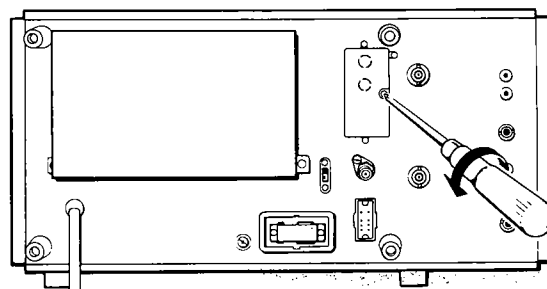


2. Set the channel select switch on the RF modulator to the inactive channel in your area, channel 3 or 4.
3. Install the RF modulator into the compartment aligning the direction properly.

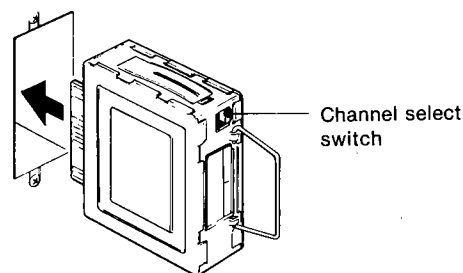

4. Replace the lid.

- Push to break off the hole and the channel select switch can be reset without removing the RF modulator compartment lid.
- For details, please refer to the instruction manual furnished with the RF kit.

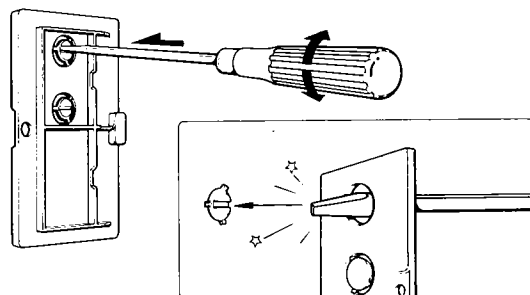


### OPERATION

1. Set the ANT/VTR selector on the antenna selector to VTR.
2. Turn the TV receiver on, and select the channel 3 or 4—the output channel of the RF modulator.
3. Turn the recorder on.
4. Insert a recorded video cassette.
5. Set the AUDIO MONITOR switch to the appropriate position.
6. Press the PLAY button. You can see a playback picture on a TV receiver.

## 1-7. TIMER OPERATION

Using an optional timer, you can start and stop recording and playback while the recorder is unattended.

### CONNECTIONS

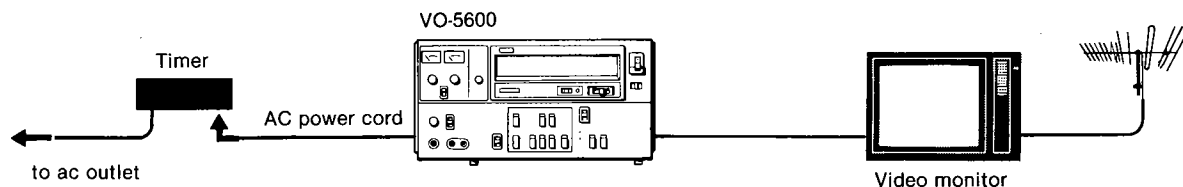

### TIMER RECORDING

1. Turn the recorder on and make preparations for recording.
2. Set the time to start and stop recording on the timer.
3. Set the TIMER switch to REC.

The recording will begin at the time set on the timer.

- When the TIMER switch is set to REC, the function buttons other than the STOP button cannot function. Also the STOP button cannot also function during the tape being threaded just after the power is turned on.
- When the timer recording is finished, be sure to set the TIMER switch to OFF. If the POWER switch is set to ON with the TIMER switch remained to REC, the recording will automatically begin and the recorded material will be erased.

### TIMER PLAYBACK

1. Turn the recorder on and make the preparations for playback.
2. Set the time to start and stop playback on the timer.
3. Set the TIMER switch to PLAY.

The playback will begin at the time set on the timer.

- Be sure to disconnect the RX-353 or RX-303 auto search control unit from this unit or the timer playback will not be activated.


## 1-8. PROGRAMMED OPERATION

Using the PROGRAMMED OPERATION switch, you can locate a particular point quickly or repeatedly play back a particular portion.

● For normal playback, set the PROGRAMMED OPERATION switch to OFF.


### To locate a particular point

1. Play the tape back and press the reset button at the desired point.
2. Set the PROGRAMMED OPERATION switch to REWIND  $\overleftarrow{000}$ . At end of the tape, the tape will automatically rewind to the point where the tape counter reads "000" and stop.
- To rewind the tape before the tape reaches the end, press the REW button. The tape will automatically rewind to the "000" point and stop as illustrated by the blue arrow.
3. Press the PLAY button to play the tape back from that point.

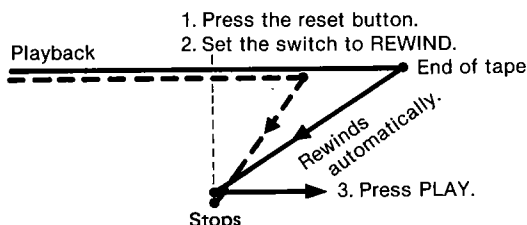

### To repeat playback between the beginning of the tape and a particular point

1. Search for the point where playback is to stop and press the reset button at that point.
2. Set PROGRAMMED OPERATION switch to REPEAT  $\overrightarrow{\text{START 000}}$ .
3. Press the REW button to rewind the tape. The tape rewinds to the beginning of the tape, then the recorder plays back the designated portion on the tape repeatedly.

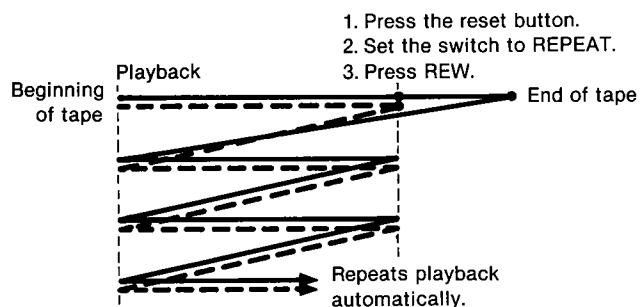

### To repeat playback of entire tape

When the reset button is pressed at the end of the tape, the tape rewinds to the beginning of the tape and the recorder plays back the entire tape repeatedly.

## 1-9. AUTO SEARCH CONTROL


With the RX-353 or RX-303 Auto Search Control (optional), any point on the tape designated in minutes and seconds can be automatically located and played back. In addition, up to 8 segments can be automatically played back in any desired order. Refer to the Auto Search Control's instruction manual for details.

### Notes

- Setting and controls on the recorder have priority over those on the Auto Search Control.
- Be sure to turn the power of the recorder off when connecting and disconnecting the 20-pin connector.
- Set the REMOTE SELECT switch to 300 and the PROGRAMMED OPERATION switch to OFF when the Auto Search Control is used.

## USING THE RX-353

The RX-353 divides the recorded material into segments. A segment has its own number and the beginning and end position on the tape, and we call them the segment data. The segment data can be recorded at the beginning of the audio channel 1 on the tape, and be kept even if the RX-353 is disconnected or the power of the recorder is turned off. So the data can be used repeatedly.

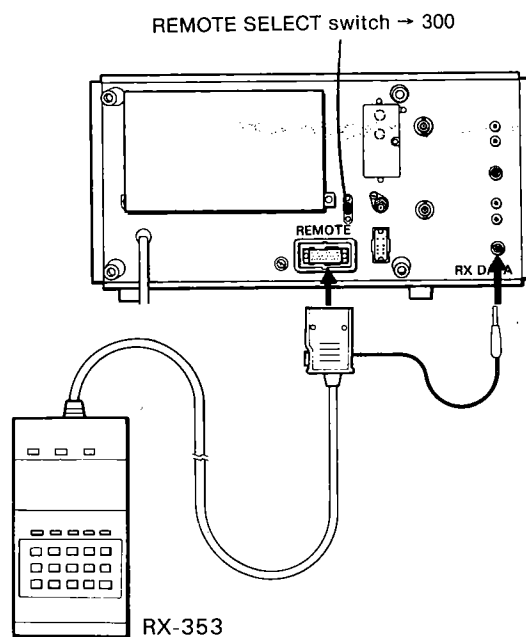


### Notes

- The data recording level is automatically adjusted. So the level adjustment is not necessary.
- Do not run the tape with the function buttons or SEARCH buttons on the VO-5600 when the RX-353 is used. This is because the indication on the tape position indicator of the RX-353 and the actual tape position do not correspond correctly when the VO-5600 is used to run the tape.



## SECTION 2 SERVICE INFORMATION


### DISASSEMBLY OF CABINET

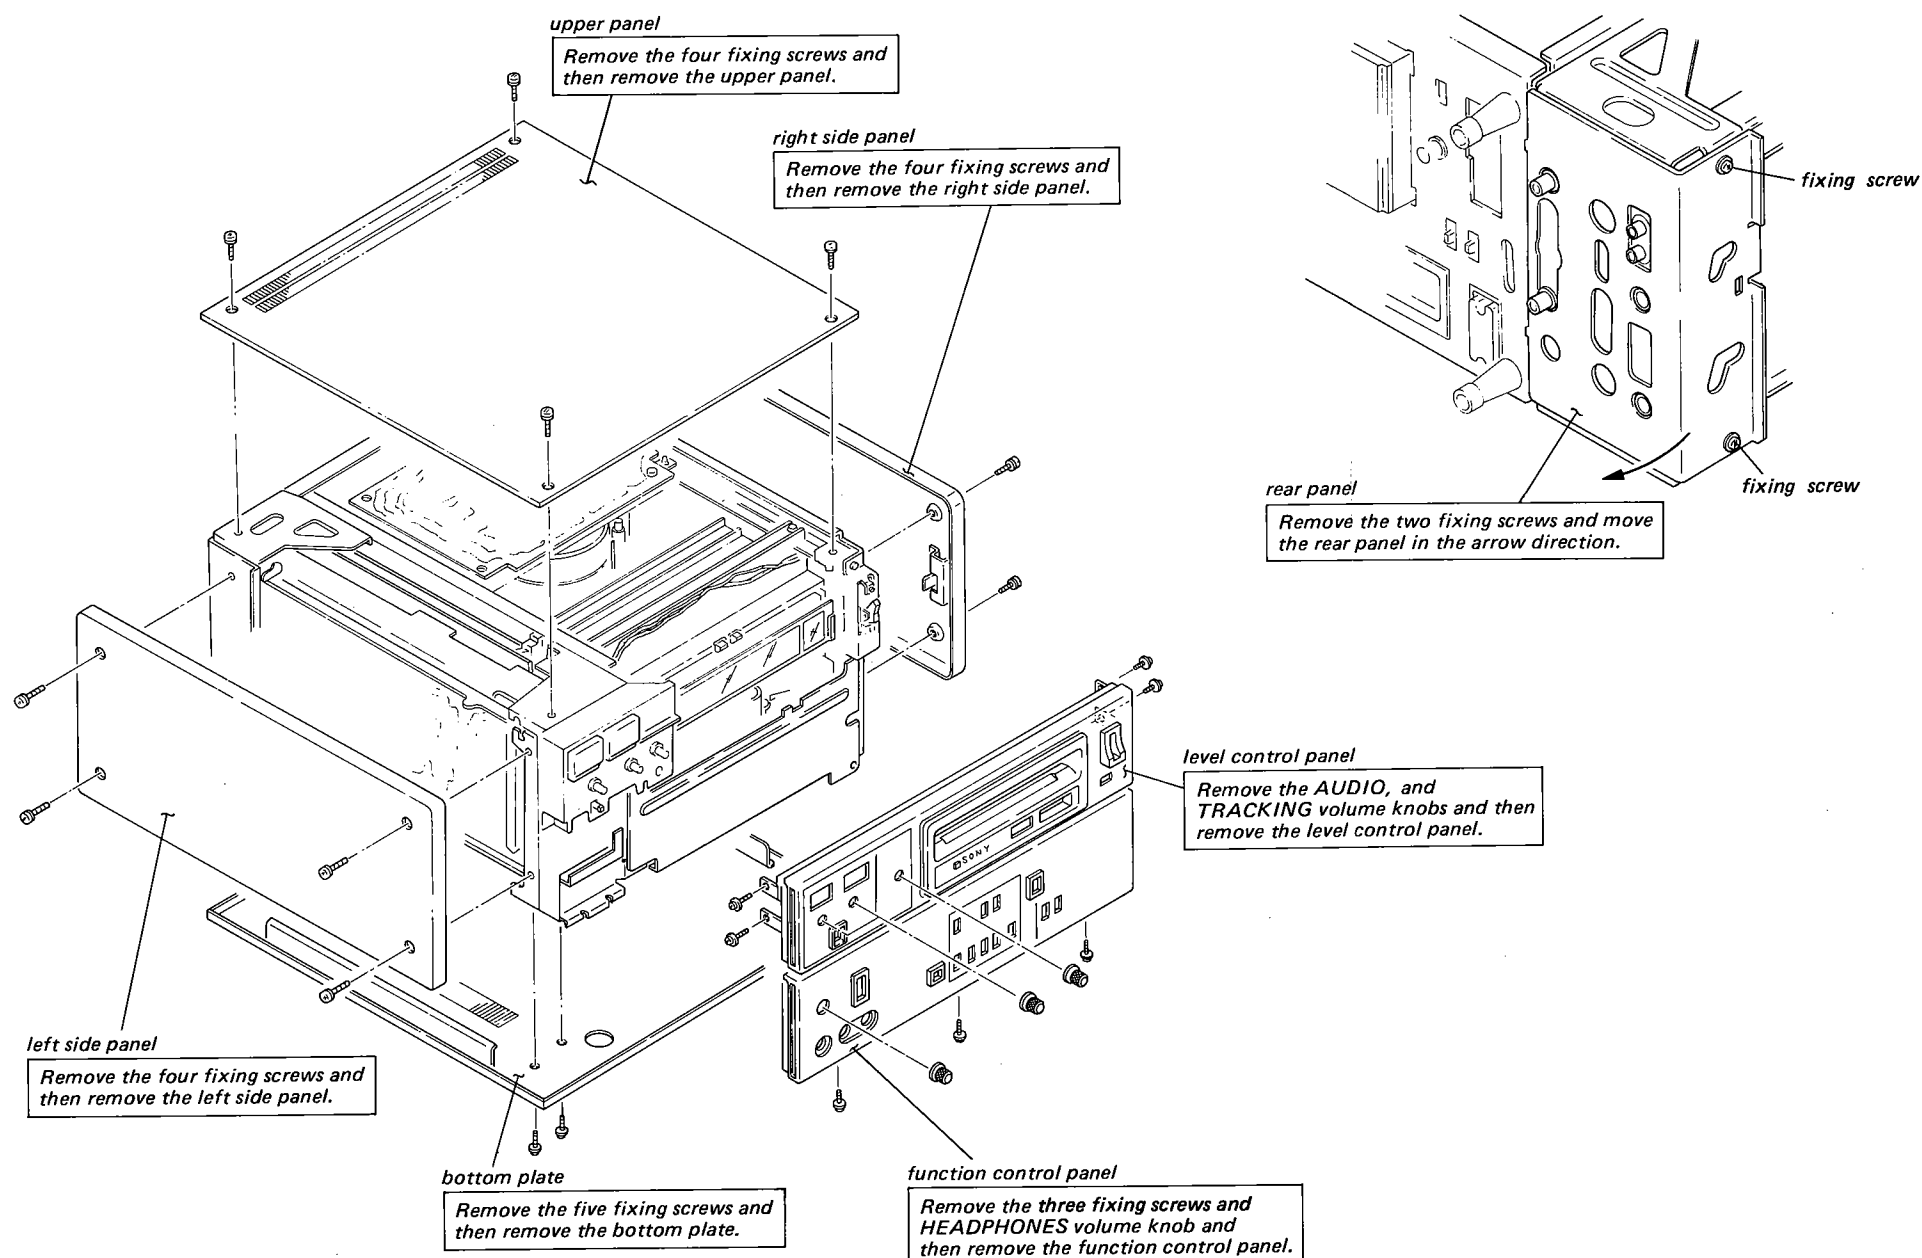

### 2-2. CASSETTE-UP COMPARTMENT REMOVAL AND INSTALLING PROCEDURES

- (1) Remove the upper panel.
- (2) Disconnect the connector of cassette-up compartment.
- (3) Loosen the fixing screw of the right-end of stay.
- (4) Remove the stay from boss of side panel.
- (5) Remove the cassette-up compartment.


Reverse the removal procedure for installing the cassette-up compartment.

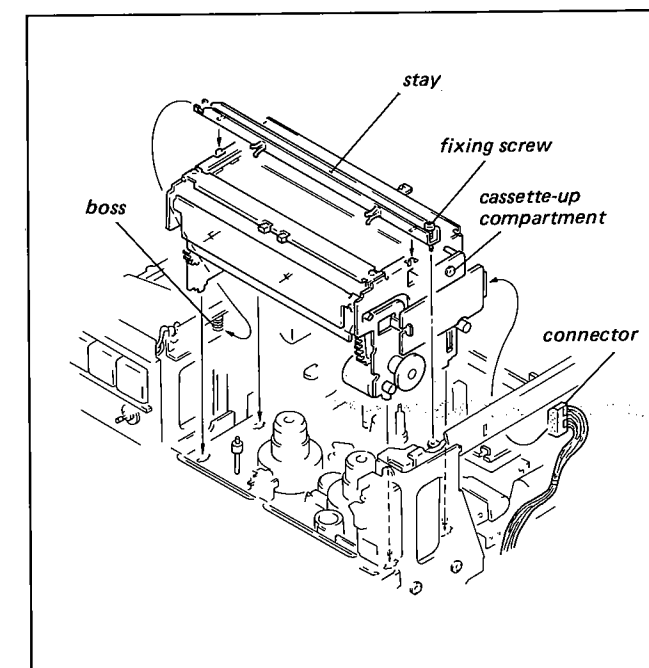

## MAIN PARTS LOCATION


### Location of the Printed Circuit Boards

TOP VIEW >

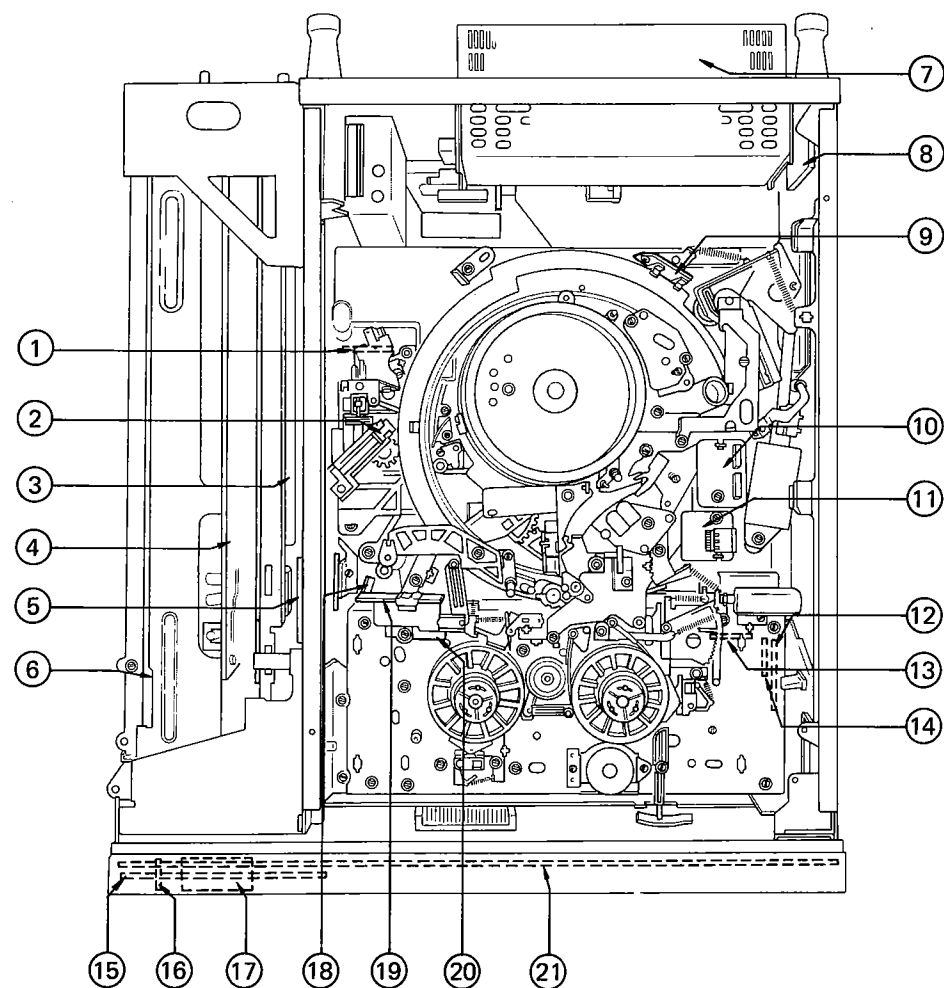

- |                               |  |
|-------------------------------|--|
| ① LM-9 BOARD                  | ⑫ CC-9 BOARD (Assembled into cassette-up compartment)  |
| ② PH-5 BOARD                  | ⑬ CC-10 BOARD (Assembled into cassette-up compartment) |
| ③ VO-9 BOARD                  | ⑭ CC-11 BOARD (Assembled into cassette-up compartment) |
| ④ SV-44 BOARD                 | ⑮ MC-14 BOARD  |
| ⑤ CN-42 BOARD                 | ⑯ HP-6 BOARD   |
| ⑥ AU-28 BOARD                 | ⑰ MI-5 BOARD   |
| ⑦ UR-01 (Switching regulator) | ⑱ SW-50 BOARD  |
| ⑧ DC-13 BOARD                 | ⑲ SW-46 BOARD  |
| ⑨ FR-11 BOARD                 | ⑳ PH-4 BOARD   |
| ⑩ AH-3 BOARD                  | ㉑ KY-21 BOARD  |
| ⑪ EC-19 BOARD                 |  |


< BOTTOM VIEW >

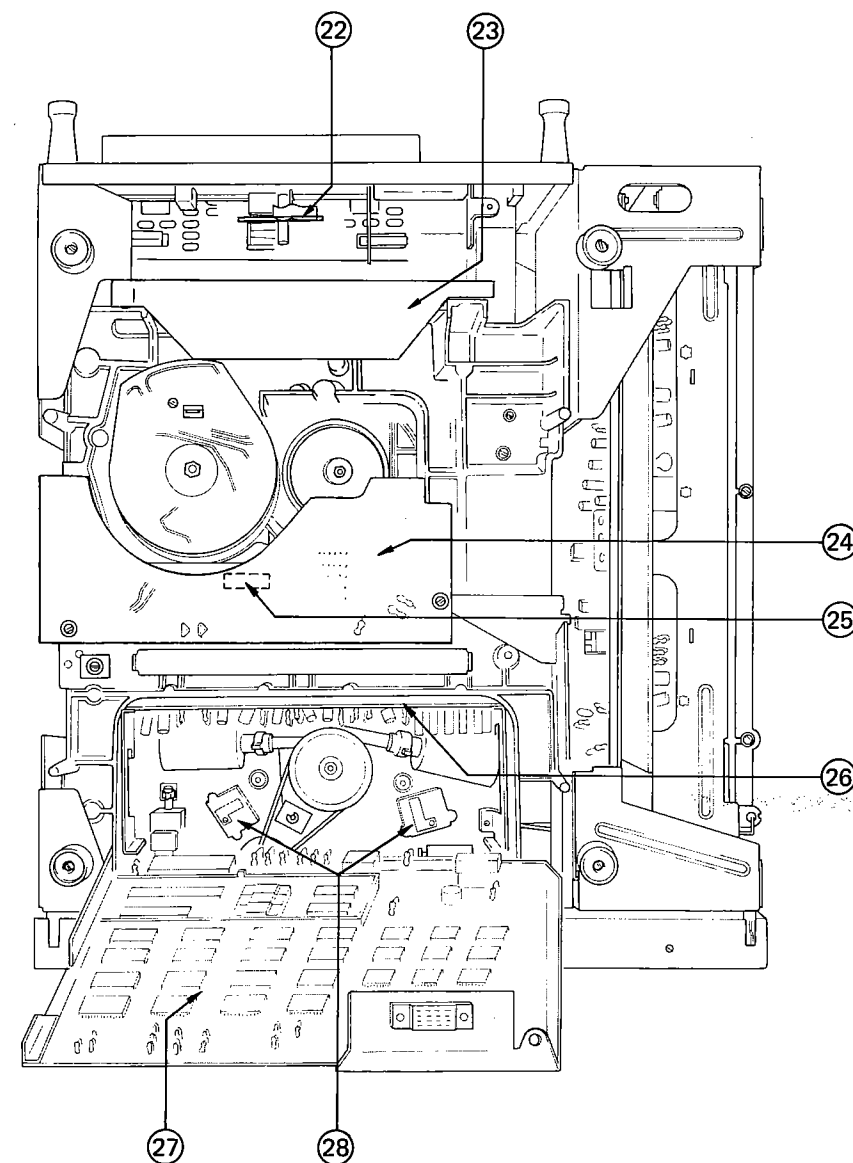

- |                     |
|---------------------|
| ⑫ AC-26/AC-45 BOARD |
| ⑬ DR-17 BOARD       |
| ⑭ MR-8/MR-11A BOARD |
| ⑮ PT-9 BOARD        |
| ⑯ PD-16A BOARD      |
| ⑰ SY-75 BOARD       |
| ⑱ SW-43 BOARD       |


## 2-3-2. Location of the Mechanical Main Parts/Components

< TOP VIEW >

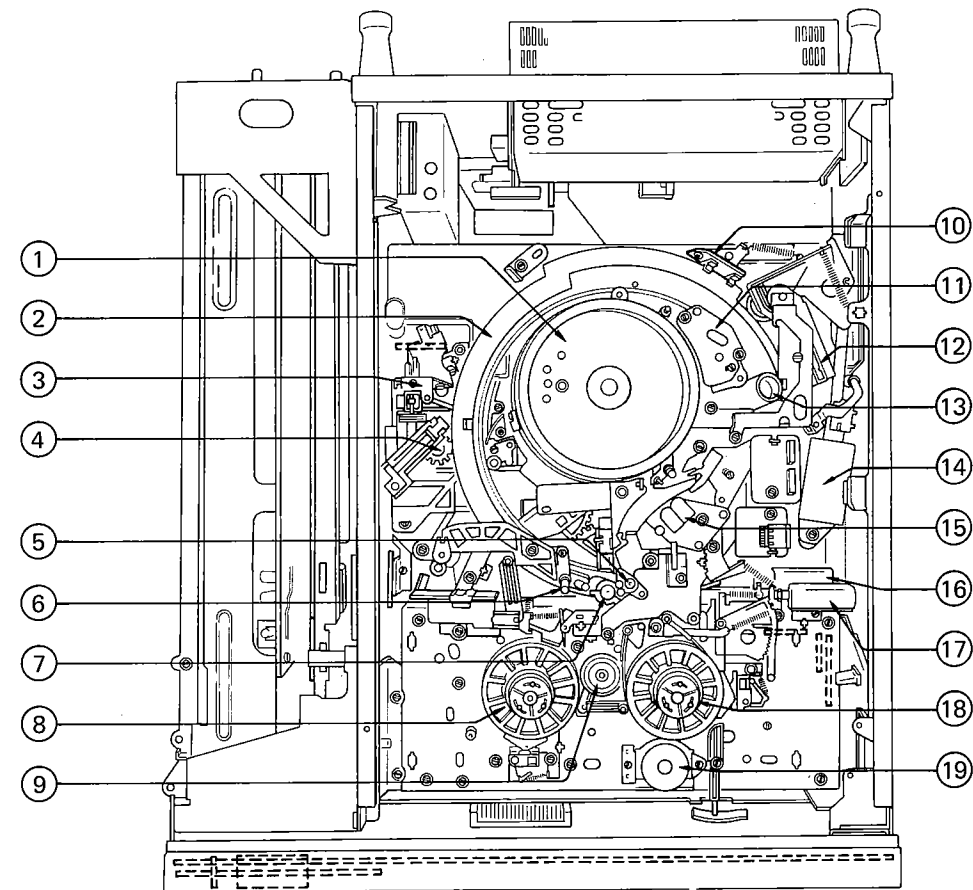


- |                      |                     |
|----------------------|---------------------|
| ① Head drum          | ⑪ Audio/CTL head    |
| ② Threading ring     | ⑫ Pinch lever       |
| ③ T correction guide | ⑬ Capstan shaft     |
| ④ Gear box           | ⑭ Pinch solenoid    |
| ⑤ S drawer arm       | ⑮ CTL/Erase head    |
| ⑥ T drawer arm       | ⑯ Search solenoid   |
| ⑦ Pinch roller       | ⑰ Skew solenoid     |
| ⑧ Take-up reel table | ⑱ Supply reel table |
| ⑨ FF/REW idler       | ⑲ Reel motor        |
| ⑩ FR detector        |                     |

< BOTTOM VIEW >

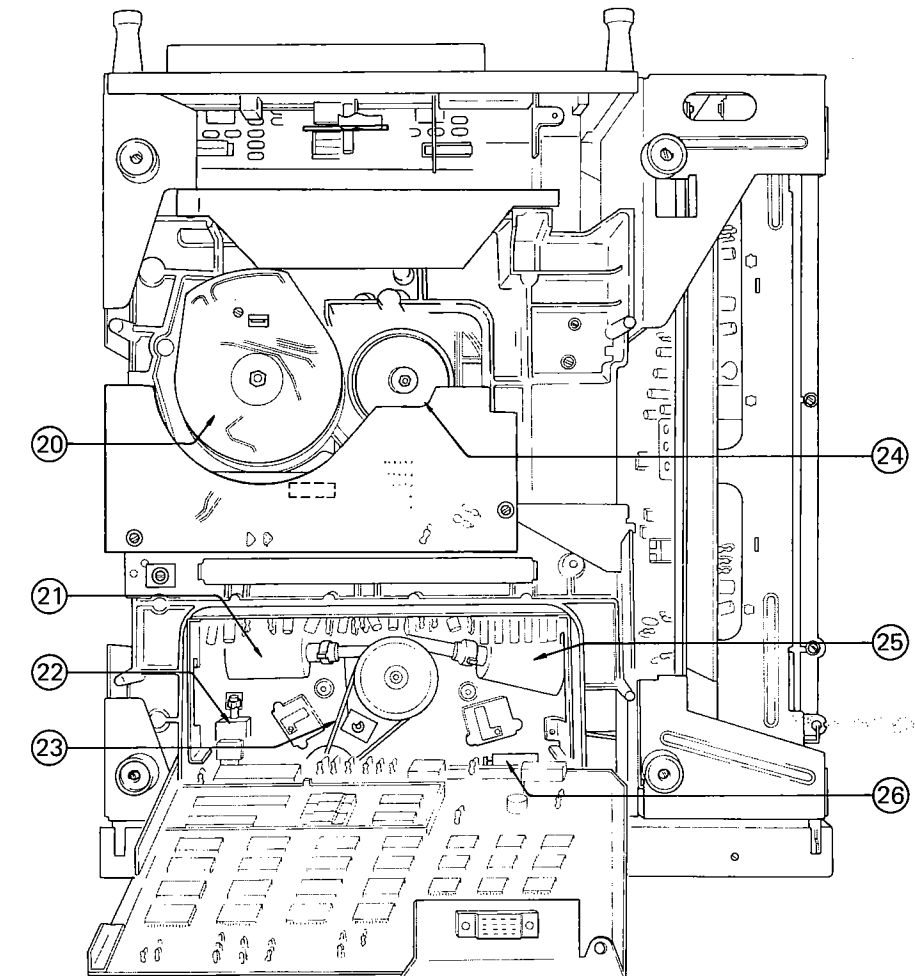

- |                          |
|--------------------------|
| ⑳ Capstan motor          |
| ㉑ Supply idler solenoid  |
| ㉒ Supply brake solenoid  |
| ㉓ Belt for FF/REW idler  |
| ㉔ Drum motor             |
| ㉕ Take-up idler solenoid |
| ㉖ Take-up brake solenoid |

## 2-4. SPARE PARTS

1. Safety Related Components Warning.  
Components identified by shading marked with  on the schematic diagrams, exploded views and electrical spare parts list are critical to safe operation. Replace these components with Sony parts whose part numbers appear in this manual or in service bulletins and service manual supplements published by Sony.
2. Replacement Parts supplied from Sony Parts Center will sometimes have a different shape from the original parts. This is due to "accommodating the improved parts and/or engineering changes" or "standardization of genuine parts".  
This manual's exploded views and electrical spare parts list indicate the parts numbers of "the standardized genuine parts at present".  
Regarding engineering parts changes in our engineering department, refer to Sony service bulletins and service manual supplements.
3. Printed Components in Bold-Face type on the exploded views and electrical spare parts list are normally stocked for replacement purposes. The remaining parts are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.


## 2-5. MACHINE POSITION FOR REPAIR WORK

When the system control circuit repair work is attempted or mechanical maintenance is attempted, place the machine with its left side panel on its top.


## 2-6. CASSETTE REMOVAL PROCEDURE WHEN NORMAL EJECTION IS NOT POSSIBLE

If the eject operation becomes impossible due to trouble or the cassette-up compartment does not rise when the eject operation takes place, the cassette tape can be removed from the set by the procedures described below.


- (1) Turn off the POWER.
- (2) Remove the upper panel.
- (3) Turn the white colored pulley of the gear box in the clockwise direction with finger until the threading ring places into the FR-STOP position.  
(The threading ring moves in the unthreading direction. But the tape remains at the position of threading completion.)

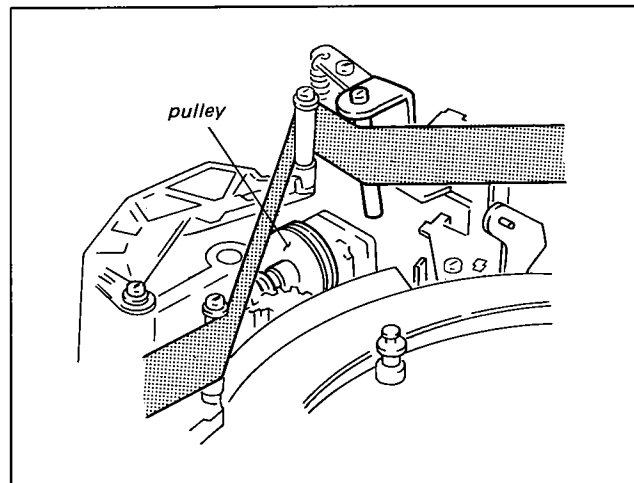

- (4) Disconnect the connector of the cassette-up compartment.
- (5) Loosen the right-end fixing screw of the stay, and remove the stay from the boss of the side panel.
- (6) Bring up the cassette-up compartment with the cassette tape in it slowly. Remove the tape remaining in the set carefully so that it does not damage.
- (7) Hold the cassette tape lid so that it does not close. Wind the tape into the cassette tape by turning the reel hub on the back of the cassette tape with finger.

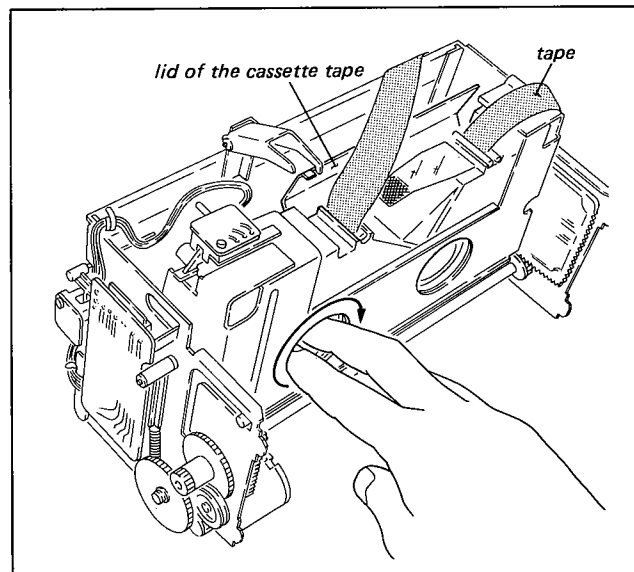

- (8) Raise the cam for opening the lid and close the cassette tape lid.

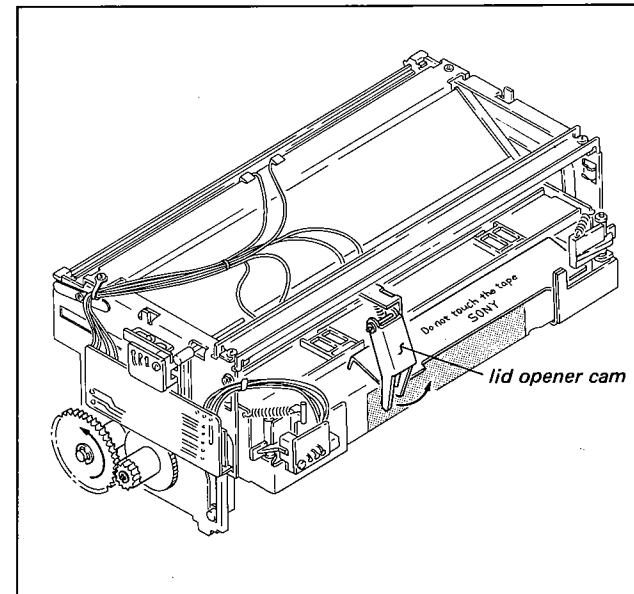

- (9) Remove the tape from the cassette compartment.
- (10) Turn the gear on the right side of the cassette compartment counterclockwise direction by hand in order to place the cassette compartment into the up state.
- (11) Locate the cause of the trouble and remedy the problem.

## 2-7. TO OPERATE THE MACHINE WITHOUT INSTALLING CASSETTE TAPE

- (1) Remove the cassette-up compartment referring to sec. 2-2. (Tape beginning sensor and tape end sensor are disabled according to disconnect the connector of cassette-up compartment.)
- (2) Turn off the POWER. (The machine is put into the FR-STOP mode automatically.)
- (3) The machine can be placed into the desired mode by pressing the function button to corresponding to the mode.

## 2-8. TAPE SLACK DETECTOR

If the tape is not taken up and tape slack is occurred in the machine, these conditions are detected with the reel rotation detector under the reel table. The reel rotation detector is composed with the slit of the reel table and the photointerrupter. If the reel table is stopped its rotation more than 0.3 sec. in all modes, the reel rotation detector circuit detect as the tape slackes in the machine, and generates the auto stop signal.

## 2-9. FIXTURE

Description	Part Number
Drum Eccentricity Gauge (3)	J-6001-820-A
Drum Eccentricity Gauge (2)	J-6001-830-A
Drum Eccentricity Gauge (1)	J-6001-840-A
Drum Eccentricity Gauge (4)	J-6001-930-A
Dihedral Adjusting Screw	J-6080-013-A
Flatness Plate	J-6009-830-A
Reel Table Height Check Base Jig	J-6130-010-A
Reel Table Height Check Jig	J-6130-020-A
Pinch Lever Adjustment Jig	J-6150-020-A
Cleaning Fluid	Y-2031-001-0
Cleaning Piece	2-034-697-00
Torque Measurement Tape (100 mm dia.)	3-702-215-01
Back Tension Adjustment Jig	3-702-216-01
Sony Oil	7-661-018-01
Tension Scale (50 g full scale)	7-732-050-20
Tension Scale (100 g full scale)	7-732-050-30
Tension Scale (200 g full scale)	7-732-050-40
Tension Scale (500 g full scale)	7-732-050-50
Alignment Tape, RR5-3SA	8-960-015-04
Thickness Gauge	9-911-053-00
Head Demagnetizer, HE-4	Standard products.



## 2-10. PRINTED CIRCUIT BOARD

The circuit board information is provided below.


SYSTEM	BOARD	CIRCUIT FUNCTION
VIDEO	VO-9	Luminance and Chrominance Signal Modulator/Demodulator
AUDIO	AU-28	Audio REC/PB Amplifier Bias/Erase Oscillator
	MI-5	CH-1/CH-2 Mic Input
	HP-6	Headphones Level Control/Headphones Jack
	EC-19	Full Erase/CTL PB Head
	AH-3	Audio REC/PB/Erase and CTL REC/PB Head
	MC-14	Audio/Tracking Meter and Level Control
SERVO	SV-44	Drum/Capstan Speed and Phase PWM Servo
	DR-17	Drum/Capstan Motor Driver
POWER SUPPLY	AC-26 AC-45	AC Input
	UR-01	Switching Regulator
	DC-13	Power Supply and Regulator
SYSTEM CONTROL	FR-11	Threading Ring Mechanical Position Detector
	PH-4	Tape Tension Detector
	PH-5	Tape Beginning Sensor Tape End Sensor
	KY-21	Function Key Board Display Driver Mode/Input/Monitor Select
	MR-8 MR-11A	Threading/Cassette Compartment Motor Driver Reel Motor Control and Driver Skew/Search/Pinch Solenoid Driver
	PD-16A	Take up Idler/Brake and Supply Idler/Brake Solenoid Driver
	SW-43	Take up Reel Rotation Detector Supply Reel Rotation Detector
	LM-9	Threading Motor
	SW-46	Miss REC Detector
	SW-50	Unthread End Detector
	CC-9	Cassette Compartment Motor/Pilot Lamp
	CC-10	Cassette in Detector
	CC-11	Cassette Down Detector
	SY-75	System Control
	PT-9	Reel Motor Power Driver
	CN-42	Connection Board

## 2-11. CASSETTE-UP COMPARTMENT OPERATION

The cassette insertion system in the VO-5600 is a front access system. The cassette compartment drops automatically after the cassette tape has been inserted into the cassette compartment and threading action is started after the cassette is seated in the home position.

The timing of the electronic switches and motor are referring sec. 2-13.


The cassette down switch, cassette in switch and cassette compartment motor operates as follows:

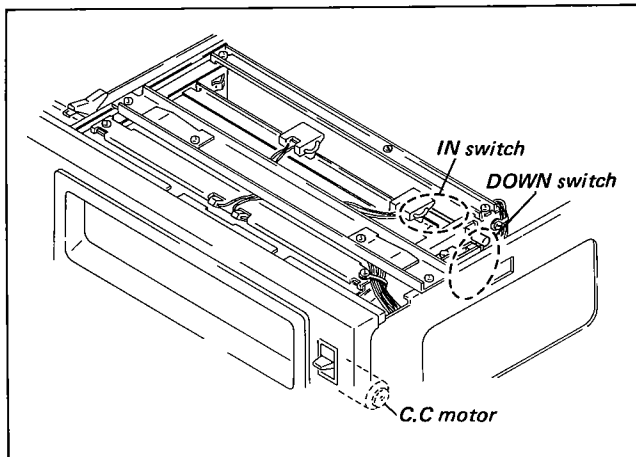

### (1) Cassette Down Switch

The cassette tape is inserted by hand and then the cassette pushing lever (called **(A)** for making the sentence simple) moves in the direction indicated by arrow **(a)**.


The down switch arm (called **(C)**) which has been held by the pin (called **(B)**) of the **(A)** moves in the direction shown by arrow **(b)** with the movement of **(A)**, and the shutter of **(C)** opens the photo-interrupter on the CC-11 board. Then the DOWN switch turns to "L".

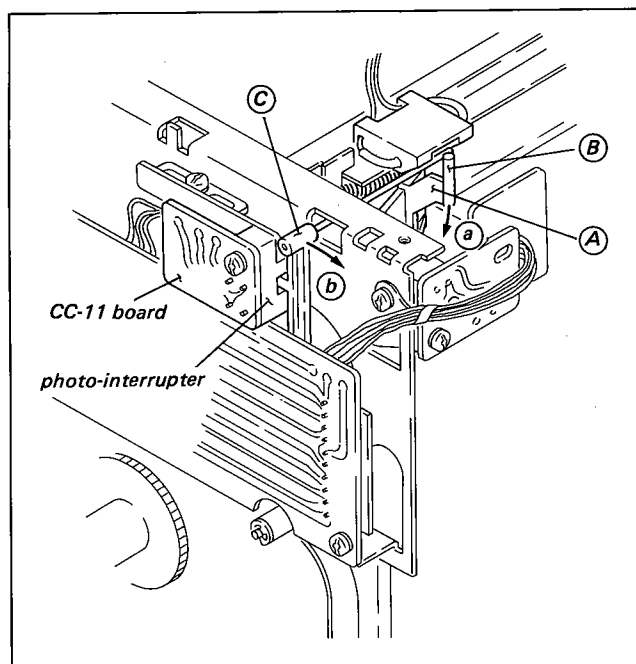

### (2) Cassette In Switch

The cassette tape is inserted by hand further after the DOWN switch operates (until the cassette is stopped).

The **(A)** shutter covers the photo-interrupter on the CC-10 board and the IN switch turns to "H".

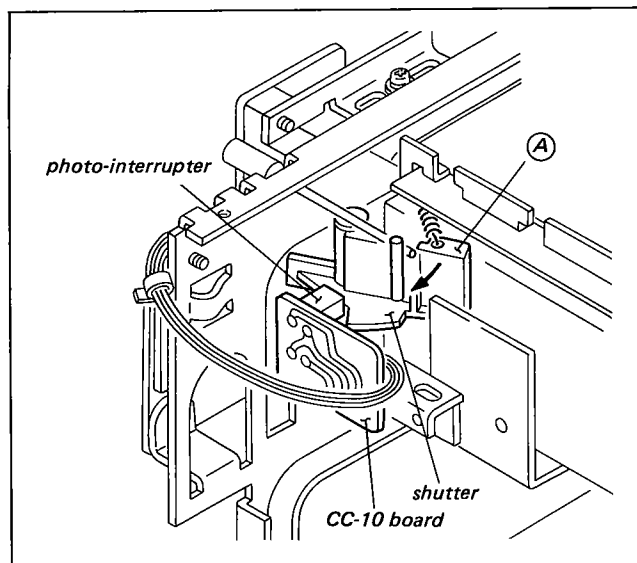


### (3) Cassette Compartment Motor (C.C. Motor)

When the IN switch turns to "H" after the cassette insertion, about 11.3 V is impressed on the C.C. motor via the CC-9 board and the motor starts. The power of the motor moves the cassette compartment through the belt and the gears.

### (4) Cassette Tape Lid Opener

When the cassette tape is inserted, the C.C. motor rotates, and the cassette compartment moves.

The lid opener arm holds the bottom section of the cassette lid at the point where the horizontal movement of the cassette compartment changes to the vertical movement. The lid is opened following with the downward movement of the cassette compartment.

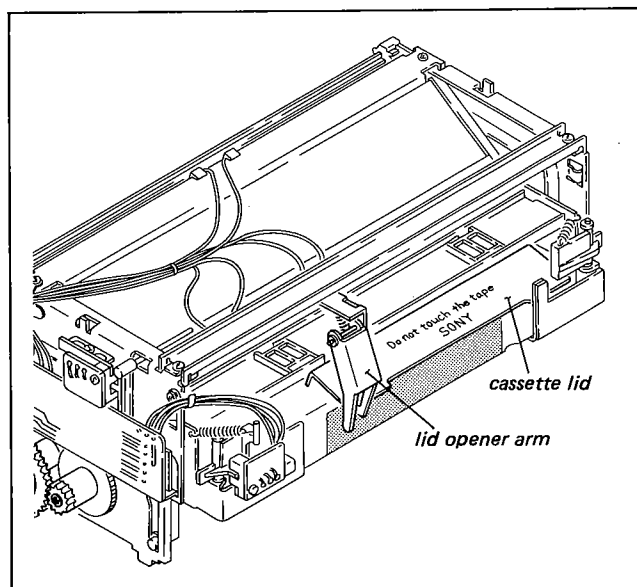


## 2-12. TAPE TENSION CONTROL MECHANISM

The tape tension control mechanism of VO-5600 is composed with the mechanical and electrical tape tension control mechanisms.

- (1) The tape tension control mechanism in normal playback, record, FWD search and unthreading modes (when the take-up reel table rotates in the counterclockwise direction (except FF mode)) is as follows:



(i) Tape feeding side (supply reel table side)

The tape back tension control mechanism of the tape feeding side is the same as the conventional VTR. This back tension control mechanism is the mechanical tape tension control mechanism.




(ii) Tape taking-up side (take-up reel table side)

The tape tension of the take-up side is controlled with the electrical tape tension control mechanism. The R brake shoe is released from the take-up reel table in this mode. The electrical tape tension control mechanism is composed with the following blocks.

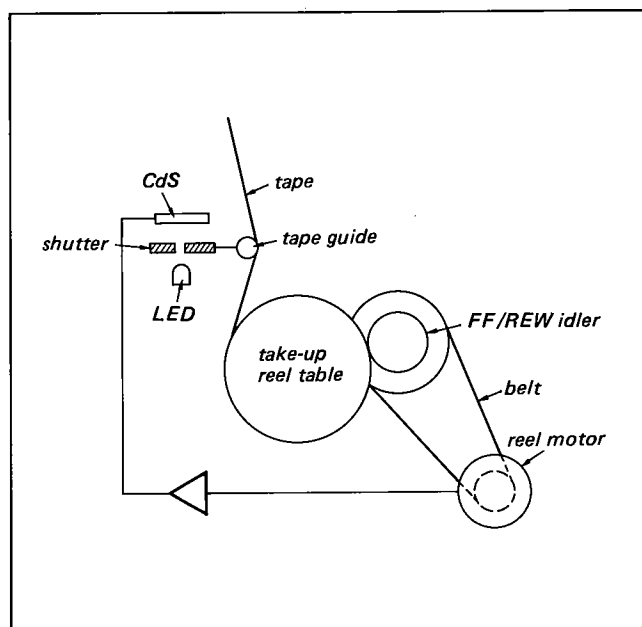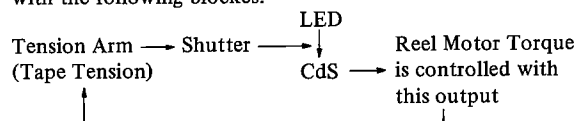

The light emitted by an LED is received by the CdS detector element through a slit on the shutter connected with the tape guide. The electrodes' pattern of this CdS is shown in figure.


The slit moves with the tape tension change and the point where the light reflector moves. Then the resistance values between ① ~ ② and the resistance between ③ ~ ② are vary. The tape tension around the tension detector tape guide is detected by the resistance variation. This resistance variation output controls the reel motor torque and the tape tension is controlled.

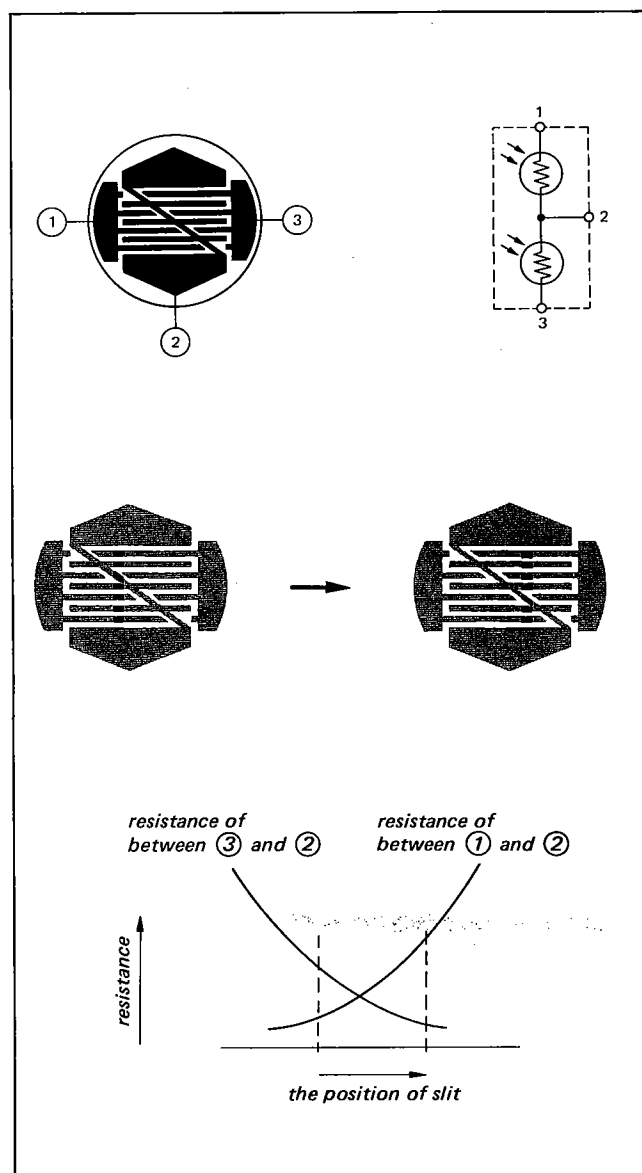


- (2) The tape tension control mechanism in REV search mode (when the supply reel table rotates in the counterclockwise direction (except REW mode)) is as follows:

(i) Tape feeding side (take-up reel table side)

The tape is supplied from the take-up reel table in this mode. The tape tension control mechanism is the same as the supply side tape tension control mechanism as mentioned former.



- (ii) Tape taking-up side (supply reel table side)  
The tape tension of the take-up side (supply reel table side) is controlled with the electrical tape tension control mechanism.

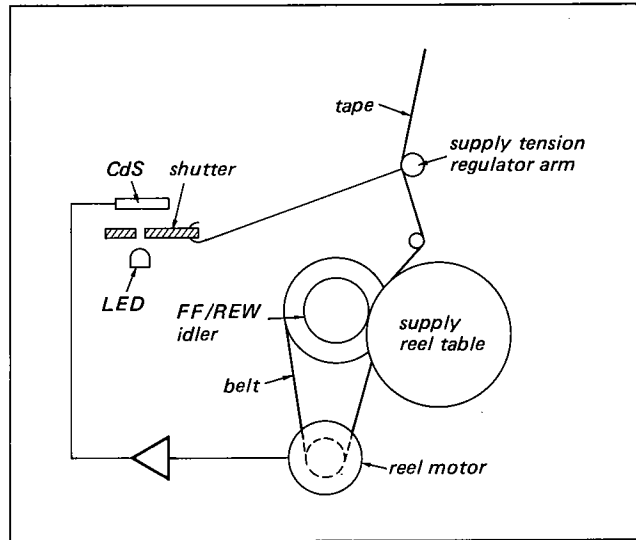


## 2-13. TIMING OF SWITCH, MOTOR AND SOLENOID


- The timing of the electronic switches, motors and solenoids in the following modes are follows.

Cassette in → FR-STOP  
FR-STOP → FWD → FWD/PAUSE  
FR-STOP → REC → REC/PAUSE  
FWD → FWD SEARCH → REV SEARCH  
FWD → FR-STOP  
FR-STOP → FF → FR-STOP  
FR-STOP → EJECT Completion


### • CASSETTE - IN → FR - STOP

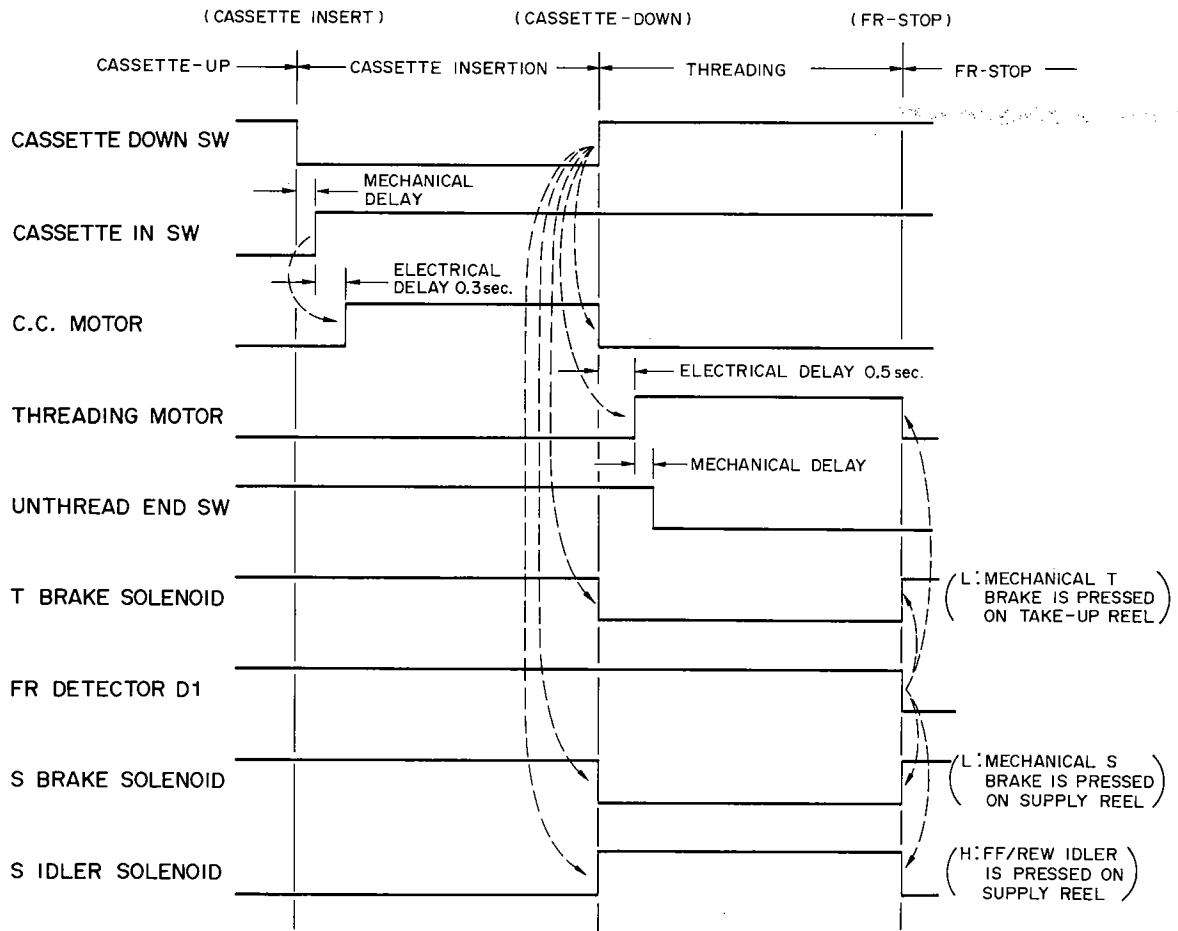


• FR-STOP → FWD → FWD/PAUSE

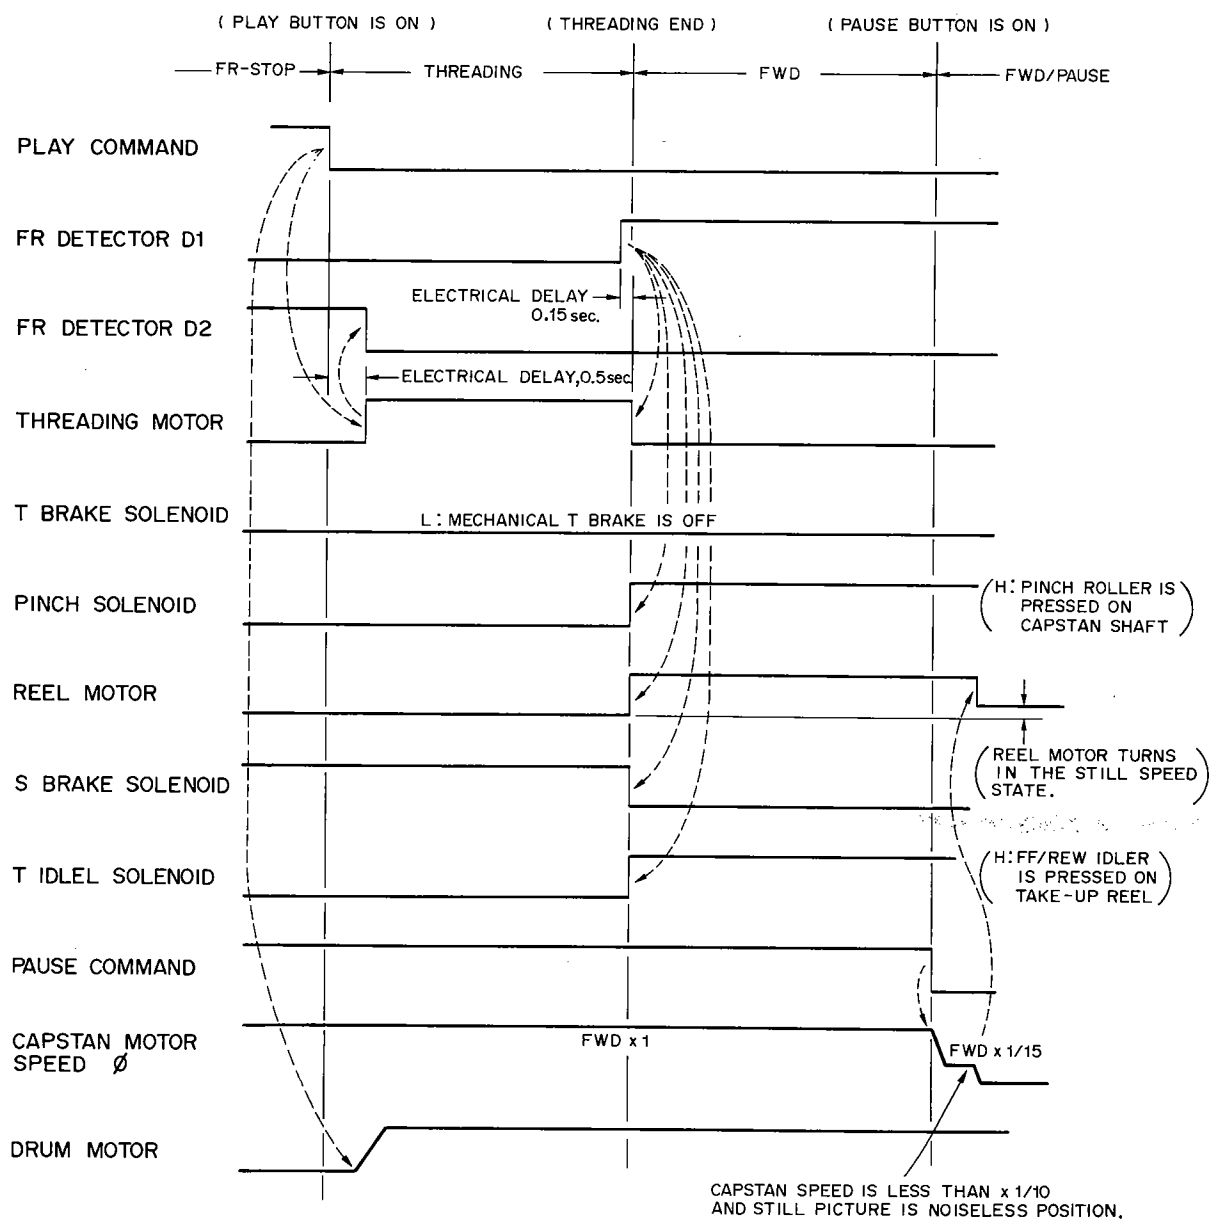


• FR-STOP → REC → REC/PAUSE

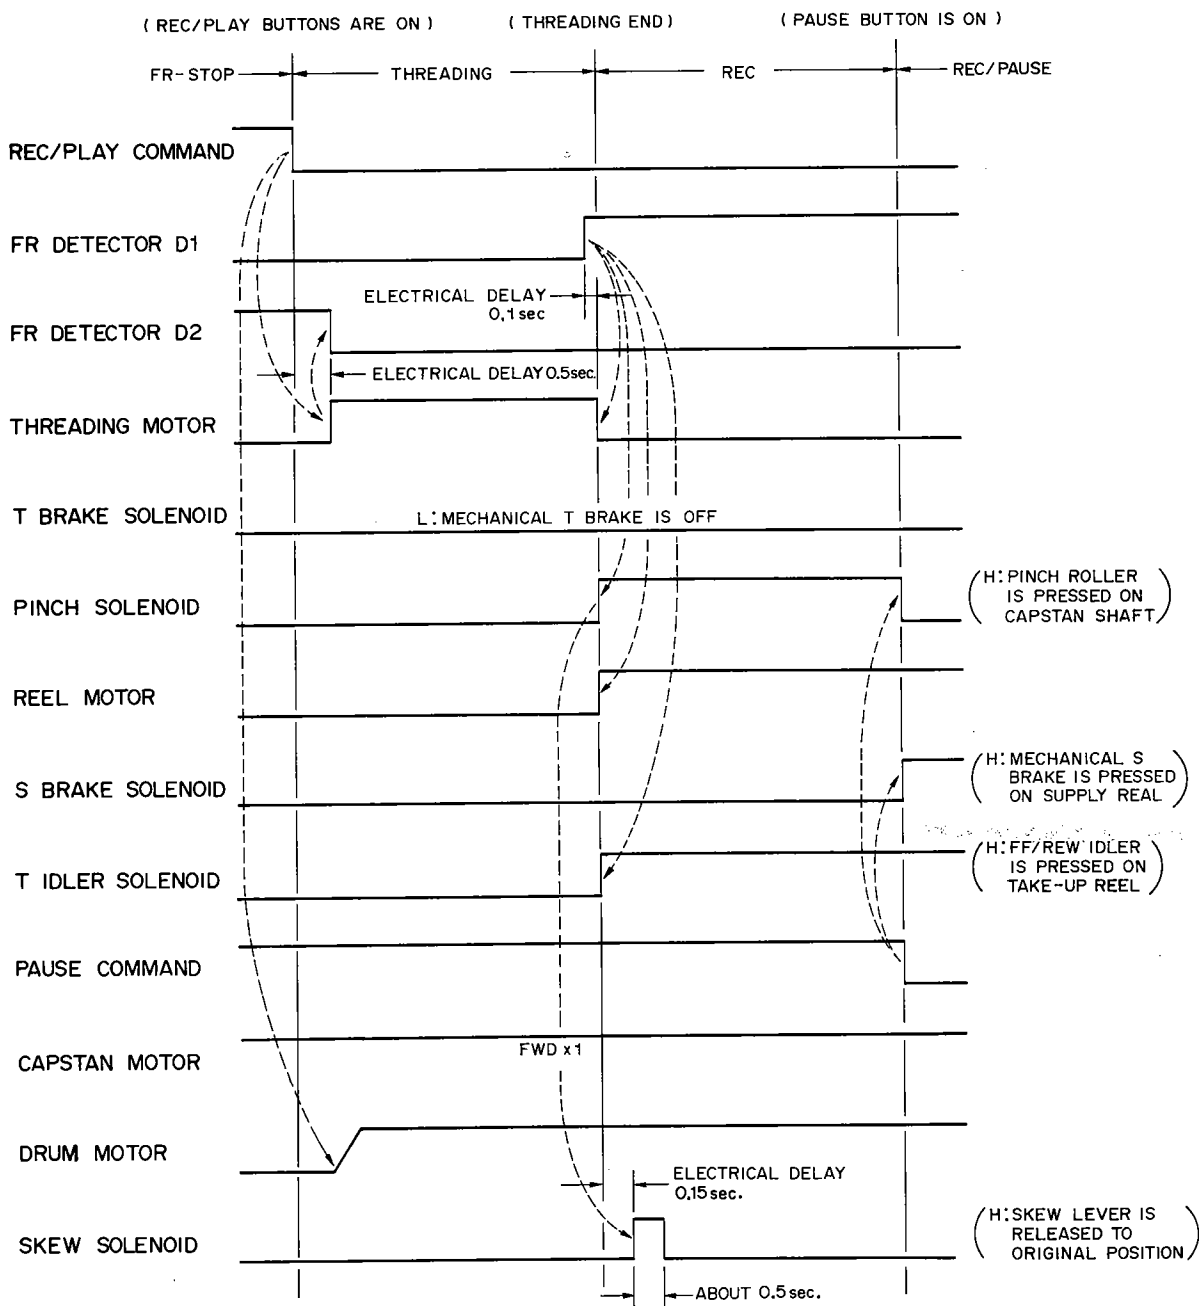

• FWD → FWD SEARCH → REV SEARCH

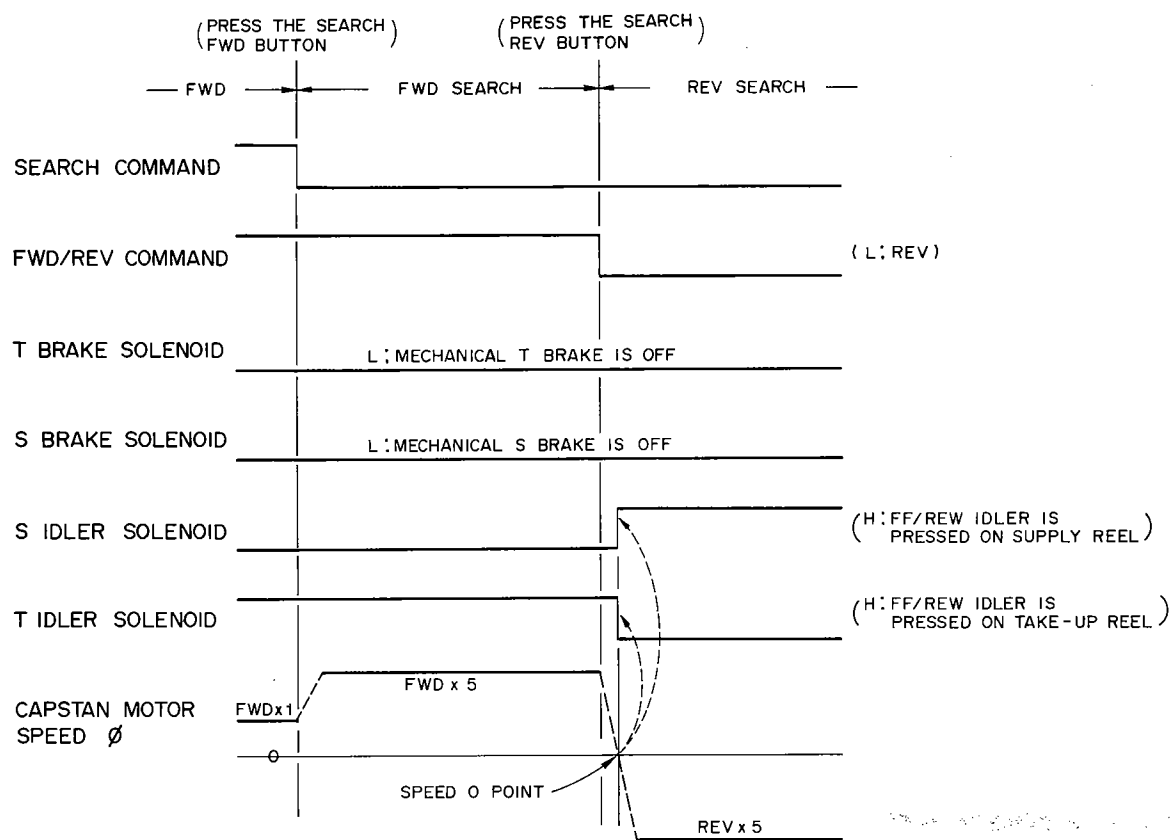


• FWD → FR-STOP

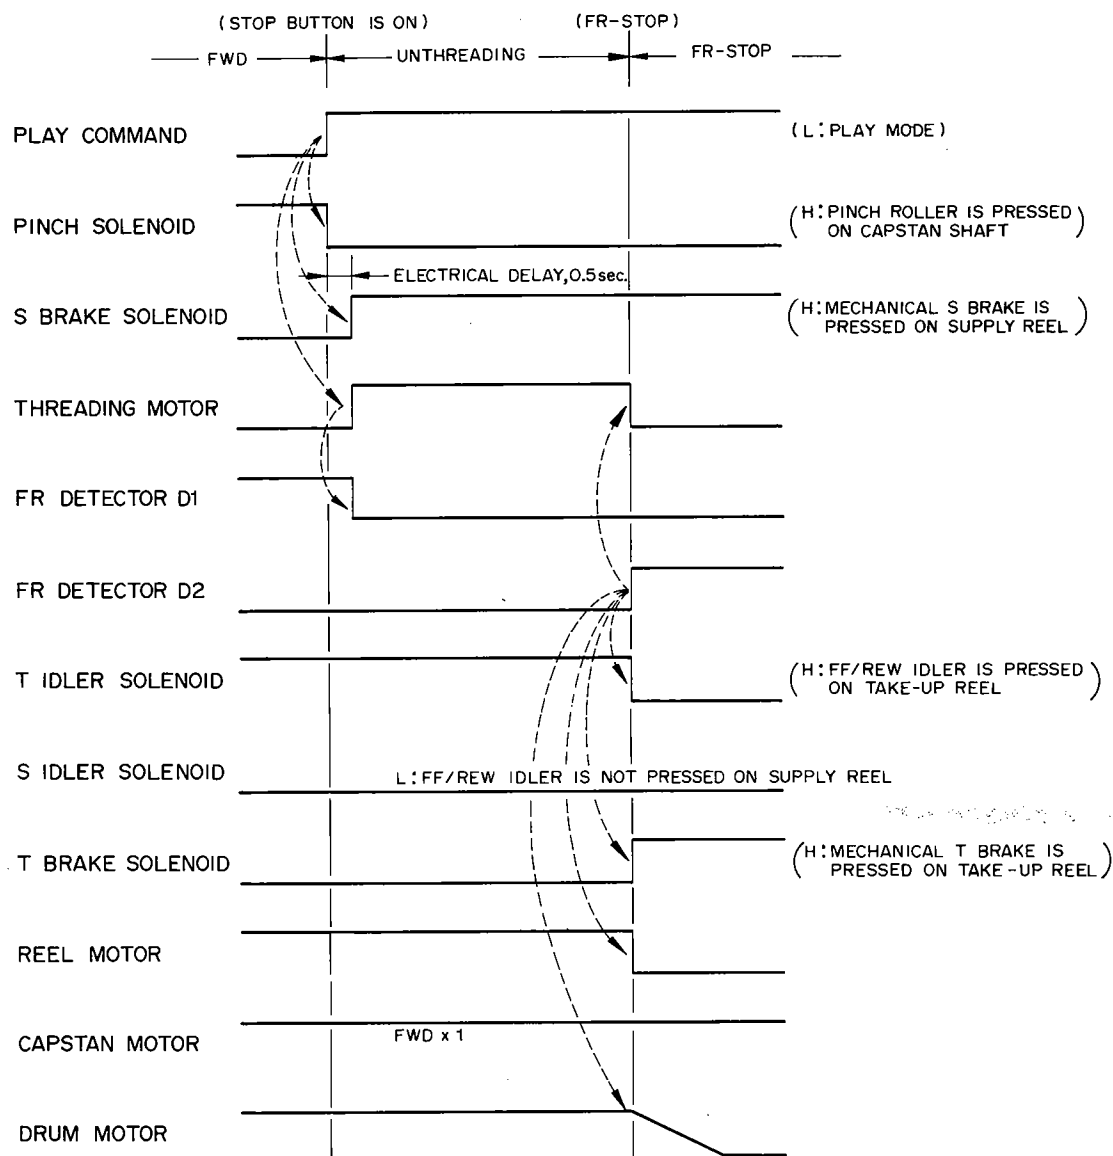




• FR-STOP → FF → FR-STOP

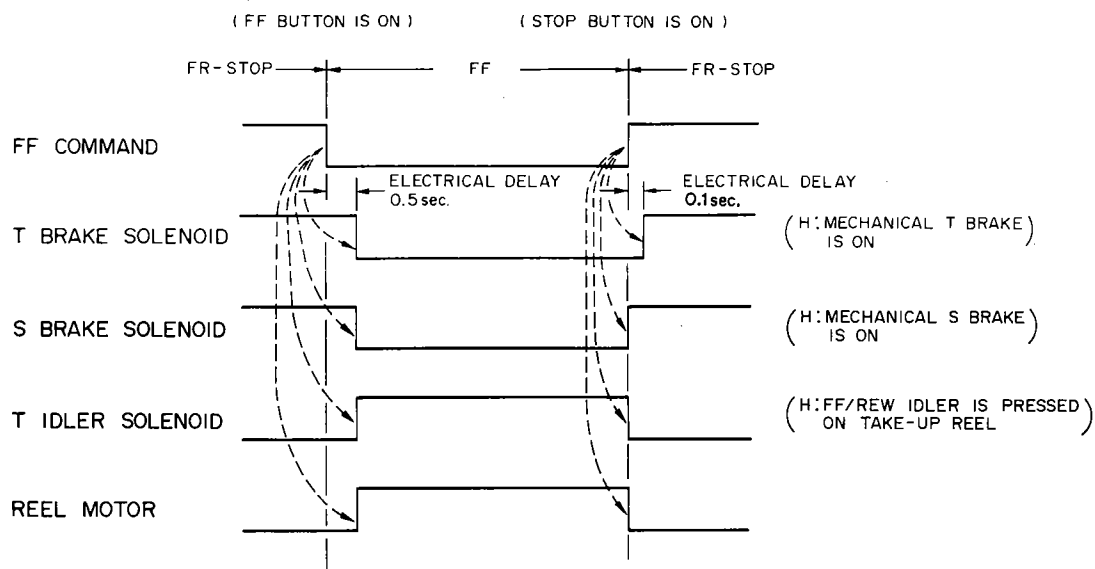

• FR-STOP → EJECT COMPLETION

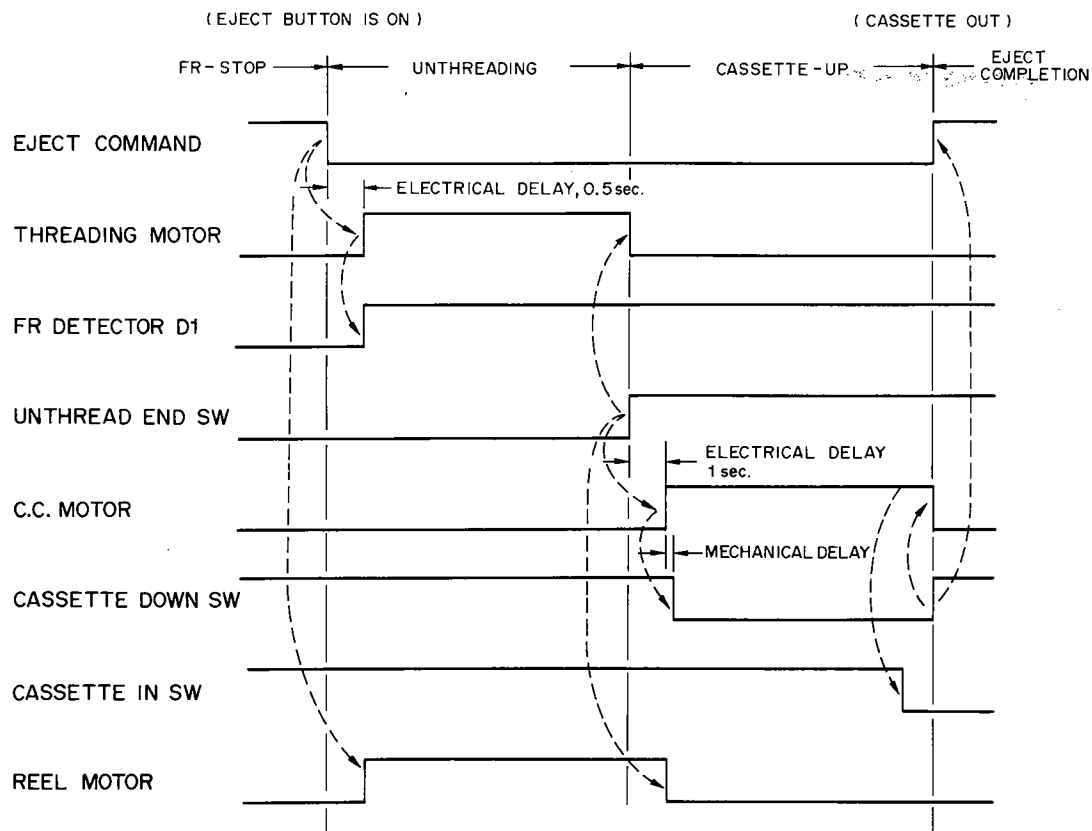



## SECTION 3

### PERIODIC CHECK AND MAINTENANCE

It is recommended to perform the maintenance and the periodic check mentioned below for the best operation of the function and performance of the machine and for prolonging the lives of the machine and the tape.

#### 3-1. MAINTENANCE AFTER REPAIRS

Perform the following maintenance after the repair without regarding the operating hours of the machine.

##### (1) Cleaning of video heads

- Press the cleaning piece moistured with the cleaning fluid and turn the drum slowly with the hand, cleaning the heads. (Never turn the motor by the electric power for the cleaning.)
- Never move the cleaning piece in the vertical direction of the head tip in the cleaning. It tends to damage the head tips.

##### (2) Cleaning of tape running system

- Wipe the tape bearing surfaces (of the tape guide, drum, capstan, and pinch roller) with cleaning piece saturated with the cleaning fluid.

##### (3) Cleaning of drive system

- Wipe the drive system (such as belt, idler, and reel table surface) with cleaning piece saturated with the cleaning fluid.

#### 3-2. PERIODIC CHECK

Perform the maintenance checks described separately in accordance with the operational hours of the machine.

#### 3-3. OTHERS

##### (1) SONY oil

- Be sure to use the SONY oil as the lubrication oil. (If oil other than the SONY oil is used, various troubles due to a different viscosity tends to be caused.)

SONY oil: Part No. 7-661-018-01

- Use the SONY oil in which dust or other foreign material have not mixed for lubricating the bearing. (If foreign material is in the oil, wear or burning of the bearing tends to be caused.)

##### (2) Grease

Be sure to use the following grease.

SONY grease: Part No. 7-662-001-62 (SGL-501)

##### (3) Regarding overhaul of equipment

When overhaul of an equipment is attempted, replace parts referring list. For the parts not listed in the list, such as motors and heads, refer the following items.

Reel motor;	about 3,000H
Capstan motor;	about H
Threading motor;	about H
Cassette-up compartment motor;	about H
Audio/CTL head;	about 3,000H
CTL/Erase head;	about H

**CHECK AND MAINTENANCE**

■ : apply oil    ○ : cleaning    ◆ : replace    ◇ : check    ⊙ : apply a grease

Operating Hours (H)		500	1,000	1,500	2,000	2,500	3,000	3,500	4,000	4,500	5,000	Remarks
Item	Part No. of Replacement Parts											
Tape path cleaning	_____	○	○	○	○	○	○	○	○	○	○	Perform whenever repair work is attempted
Video heads cleaning and replace	A-6709-136-A	○	◆	○	◆	○	◆	○	◆	○	◆	Life of the video heads are affected extensively by operating ambient conditions
Replacement of pinch roller	A-6750-125-D	○	◆	○	◆	○	◆	○	◆	○	◆	Life of the pinch roller are affected extensively by operating systems
Replacement of FF/REW idler belt	3-668-785-00	○	○	○	◆	○	○	○	◆	○	○	
Replacement of reel table	A-6739-017-A	○	■	○	◆	○	■	○	◆	○	■	
Replacement of R brake shoe	X-3668-737-0	—	—	—	◆	—	—	—	◆	—	—	
Replacement of brake band	X-3668-707-0	—	—	—	◆	—	—	—	◆	—	—	
Replacement of belt on gear box	3-668-946-00	○	○	○	○	○	○	○	◆	○	○	
Replacement of belt on cassette-up compartment	3-653-387-00	○	○	○	○	○	○	○	◆	○	○	
Cleaning the shaft of the threading roller on the threading ring	_____	—	○	—	○	—	○	—	○	—	○	Clean with a cloth dampened with a cleaning fluid
Apply a grease on the ring rollers	_____	—	⊙	—	⊙	—	⊙	—	⊙	—	⊙	Apply a grease on the surface of the ring roller
Check the FWD back tension	_____	—	◇	—	◇	—	◇	—	◇	—	◇	Refer to sec. 6-6
Check the FWD torque	_____	—	◇	—	◇	—	◇	—	◇	—	◇	Refer to sec. 6-3
Check the REV torque	_____	—	◇	—	◇	—	◇	—	◇	—	◇	Refer to sec. 6-4
Check the brake torque	_____	—	—	—	◇	—	—	—	◇	—	—	Refer to sec. 6-1

## SECTION 4

### REPLACEMENT OF MAJOR PARTS

#### 4-1. REPLACEMENT OF UPPER DRUM ASSEMBLY

- The rotary video heads cannot be replaced individually; the whole upper drum assembly must be replaced when any one of these heads fails.

**Tool:**


- Drum eccentricity gauge (1)
- Drum eccentricity gauge (2)
- Drum eccentricity gauge (3)
- Drum eccentricity gauge (4)
- Cleaning fluid

**Replacement procedure:**

- (1) Unsolder the four leads of the video head from the printed circuit board and remove the upper drum assembly from the head drum assembly.
- (2) Clean the matching surfaces of the flange and new upper drum assembly with a cloth moistened with cleaning fluid. (If there is a spacer between drum and flange, it should remain in place, or be re-installed in the same place with the new upper drum assembly.)
- (3) Place the upper drum assembly so that the head of the white leads is close to the round indentation on the surface of the flange. (The rounded indentation can be seen through the hole in the end of the printed circuit board the white leads are connected to). Thread the two screws snugly but do not tighten.

**Adjustment procedure:**

- (1) Remove the S guard block (Because the S guard's bottom connector is inserted into the connector on the chassis, it need the power to remove.)
- (2) Assemble the drum eccentricity gauges (1), (2), (3) and (4) as shown in figure. Mount the assembled gauges on the machine so that the tip probe positiones at the point about 5 mm apart from the top edge of the upper drum.
- (3) Turn the upper drum slowly clockwise and confirm the pointer deflection of the gauge is within  $5\mu$  during one complete turn of the upper drum. If this specification is satisfied, proceed with step (5). If it is not, perform step (4).
- (4) Tap the inside of the upper drum with a nylon hammer or a screwdriver handle and like so that the gauge deflection remains within  $5\mu$ .
- (5) After the adjustment, tighten the two screws that are securing the upper drum, alternately and gradually using a tightening torque:  $14 \sim 16 \text{ kg.cm}$ .

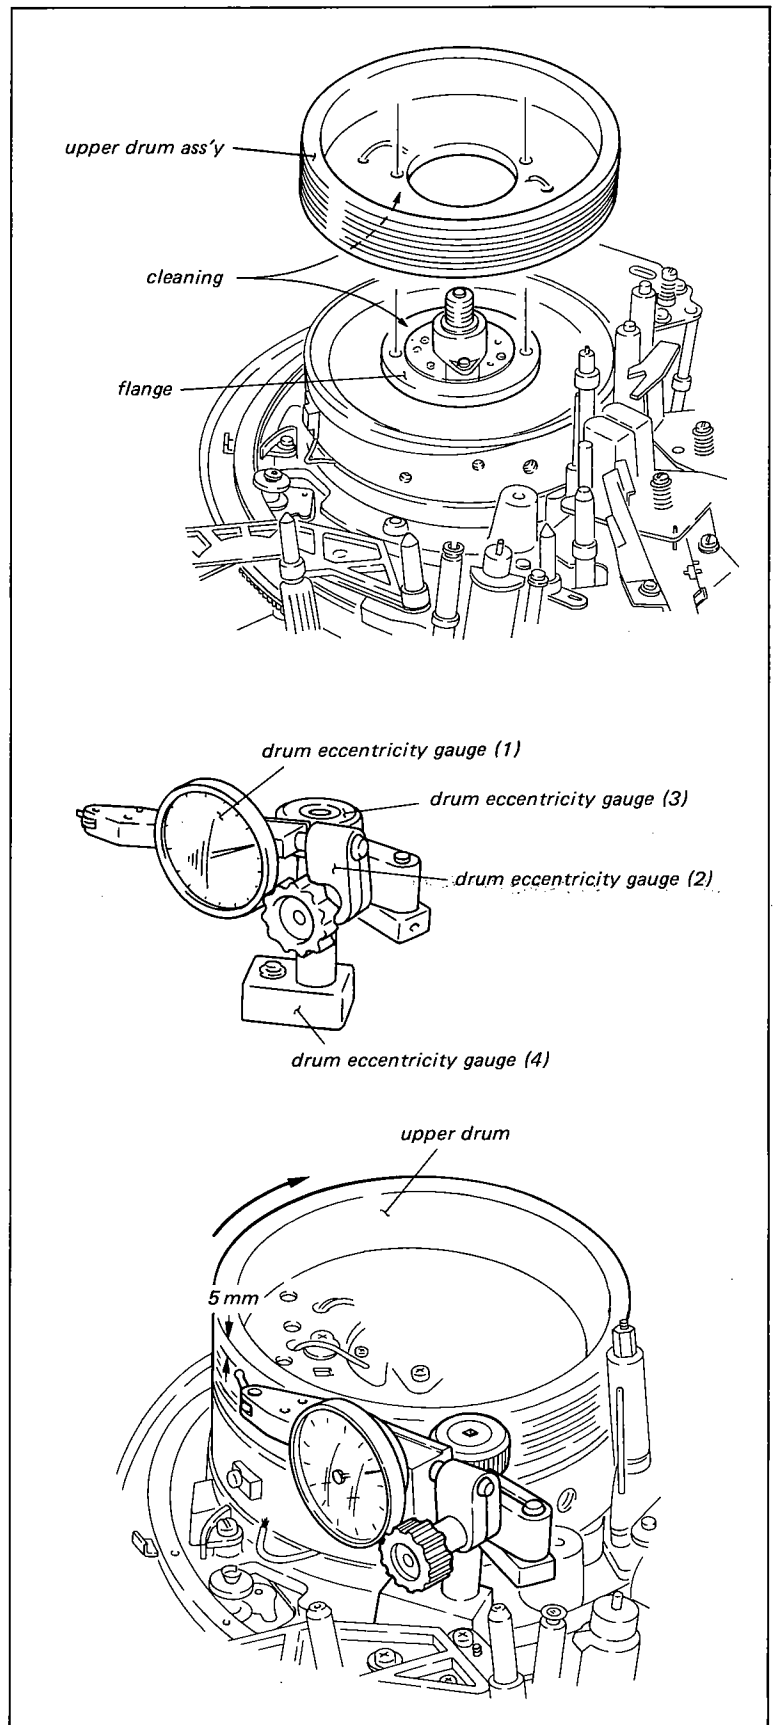


- (6) After the screws are tightened, check again that the eccentricity of the upper drum is within  $5\mu$ .
- (7) Solder the four leads from the video heads to the printed circuit board.
- (8) Install the S guard block.
- (9) Perform the various adjustments as shown in page 4-6.

#### 4-2. REPLACEMENT OF DRUM ASSEMBLY

**Replacement procedure:**


- (1) Disconnect the connectors (CN1 and CN2) of the drum assembly and CN2 on the VO-9 board.
- (2) Remove the three fixing screws on the back of the chassis and remove the defective drum.
- (3) Install the drum on the base while turning the drum assembly in the clockwise direction as seen from top of the set.
- (4) Connect the three connectors.
- (5) Perform the various adjustments as shown in page 4-6.

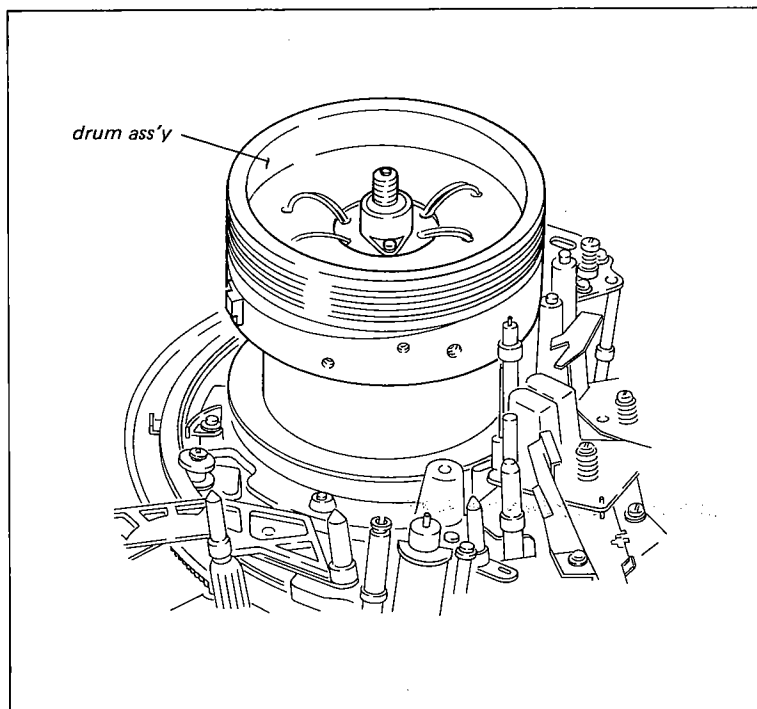

### 4-3. REPLACEMENT OF CAPSTAN MOTOR

#### Replacement procedure:


- (1) Remove the capstan motor.
- (2) Install the new capstan motor and thread three fixing screws snugly but do not tighten.
- (3) While turning the capstan motor in the counterclockwise direction as seen from top of the set and tighten the fixing screws.

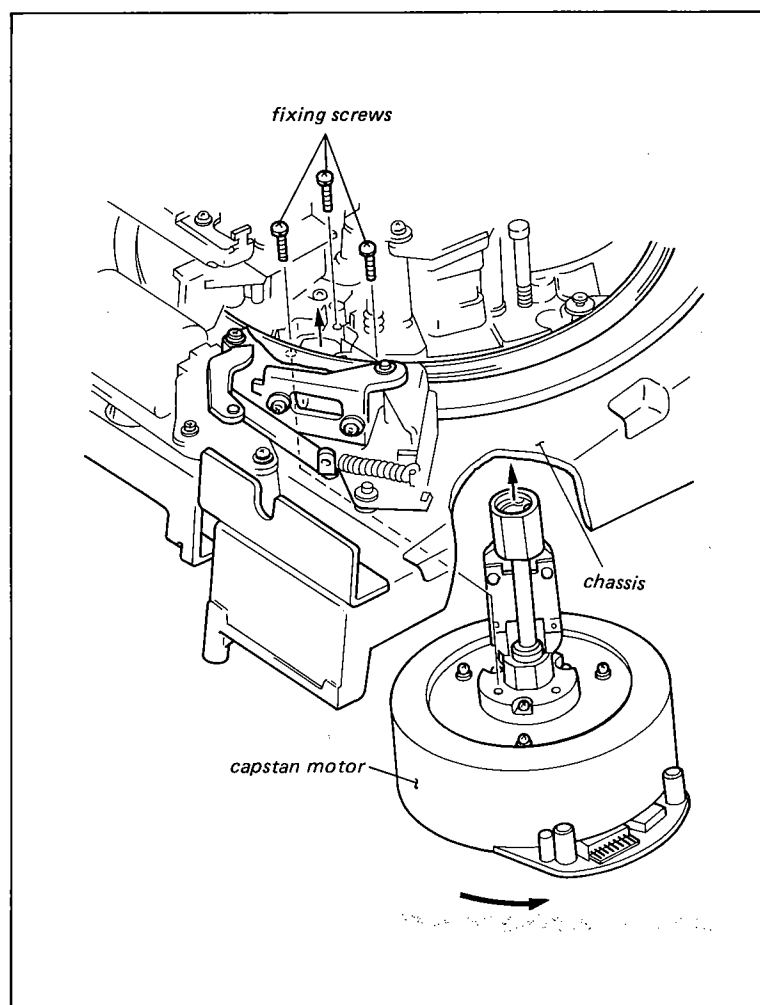

### 4-4. REPLACEMENT OF CTL PB HEAD

#### Replacement procedure:



- (1) Remove the locking screw and remove the CTL PB head from the chassis. Do not tighten or loosen three adjusting screws.
- (2) Loosen the two fixing screws under the bracket and replace the CTL PB head.

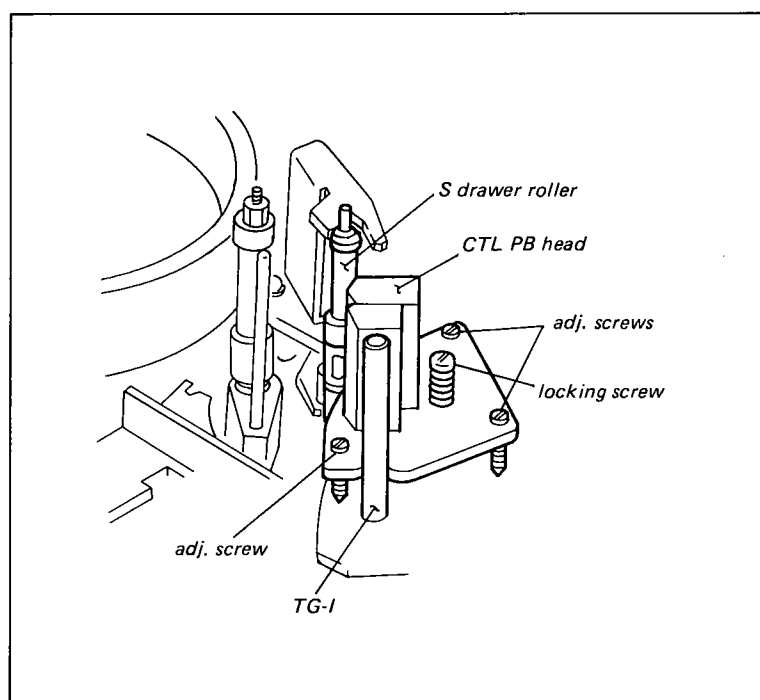

#### 4-5. REPLACEMENT OF S DRAWER ROLLER

**Replacement procedure:**

- (1) Put the machine into the EJECT completion mode without cassette tape.
- (2) Turn the pulley of the gear box with finger until the S drawer roller places in front of the CTL PB head.
- (3) Remove the S drawer roller from the shaft while pushing the spring holder in the arrow direction.
- (4) Install the new S drawer roller into the shaft until the S drawer roller locks to the shaft while pushing the spring holder in the arrow direction.

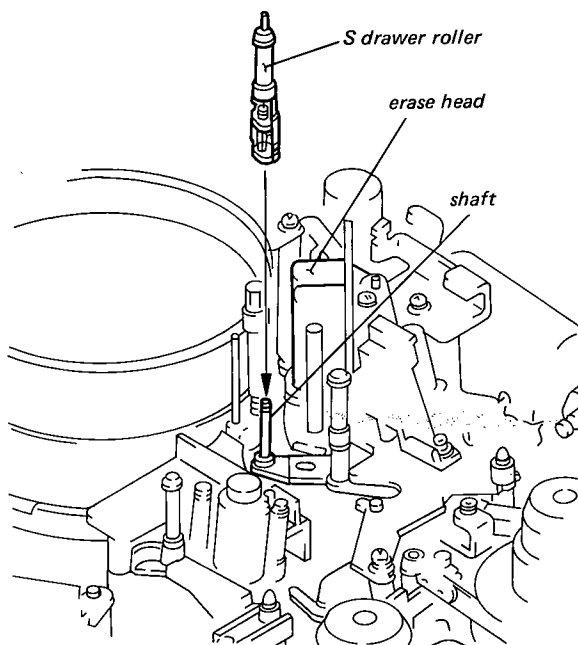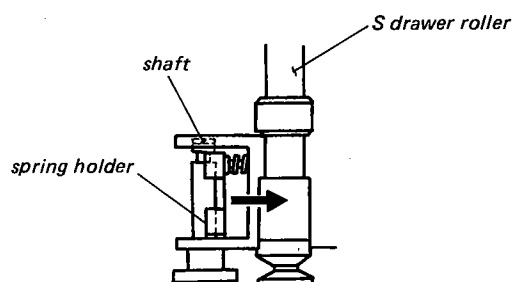



#### 4-6. REPLACEMENT/ADJUSTMENT OF TAPE GUIDES ON THREADING RING

##### Tool and equipment:



Slide vernier calliper or the equivalent.  
Cleaning fluid.

##### Replacement procedure:

- (1) Remove the tape guide.
- (2) Clean the surface of the shaft with a cloth dampened with a cleaning fluid.
- (3) Assemble the parts.
- (4) The sub-ring upper tape guide and lower tape guide are necessary to perform the guide width adjustment.

##### Adjustment procedure:

- (1) Adjust the tape guide width to meet the required specification.

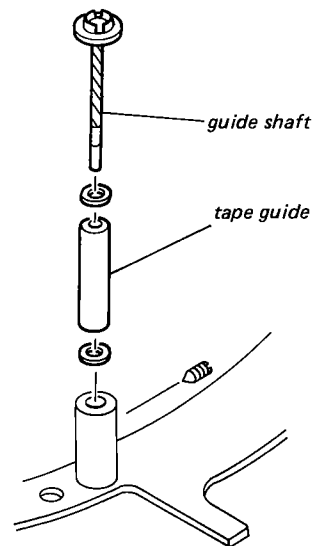

## 4-7. ADJUSTMENT ITEM TABLE AFTER MAIN PARTS REPLACEMENT

Replacement Parts	Adjustment Items
• Threading Ring	Threading Ring Rotation Adjustment (5-3-1) → Bear Box Position Adjustment (5-3-2) → FR Detector Block (5-3-4) Mounting Position Adjustment (5-3-3) → Pinch Roller Self-Alignment Adjustment (5-4-1) → Pinch Lever Pre-set Adjustment (5-4-2) → Pinch Roller Pre-set Adjustment (7-1) → FF and REV Modes Tape Path Adjustment (7-2) → T Correction Guide Slantness Adjustment (7-6, (7-6-1, 7-6-2)) Roller → FWD Mode Tape Path Adjustment (1) (7-3) → FWD Mode Tape Path Adjustment (2) (7-4) → REV Mode Tape Path Adjustment (7-5) → Video Tracking Adjustment (7-7-1) → CTL. PB Head Height/Azimuth/Zenith Adjustment (7-7-2) → Video Tracking Adjustment (check). (7-7-1)
• Pinch Roller	Pinch Roller Self-Alignment Adjustment (5-3-3) → Pinch Roller Pre-set Adjustment (5-4-2) → FWD Mode Tape Path Adjustment (2) (7-4) → REV Mode Tape Path Adjustment (7-5) → Tape Path Adjustment Around Pinch Roller (7-6, (7-6-1, 7-6-2)) → Video Tracking Adjustment (check). (7-7-1)
• Take-up Reel Table	Reel Table Height and Vertical Play Adjustment (5-1-2) → T Brake Torque Adjustment (6-1-2) → REW Brake Torque Adjustment (6-1-3) → FF and REV Torque Adjustment (6-2) → FWD Torque Adjustment (6-3) → FF and REV Tape Path Adjustment. (7-1)
• Supply Reel Table	Reel Table Height and Vertical Play Adjustment (5-1-2) → S Brake Torque Adjustment (6-1-1) → FF and REW Torque Adjustment (6-4) → REV Torque Adjustment (6-5) → FF Back Tension Adjustment (6-6) → FWD Back Tension Adjustment (7-7-1) → Video Tracking Adjustment (check). (7-7-1)
• Brake Band	FF Back Tension Adjustment (6-5) → FWD Back Tension Adjustment. (6-6)
• Capstan Motor	Pinch Lever Right Angle Adjustment (5-3-3) → Pinch Roller Self-Alignment Adjustment (9-5) → SEARCH x5 Speed Adjustment (9-6) → Capstan FWD and REV Detector Adjustment (9-3) → Free Speed Adjustment (9-4) → Capstan STOP Servo Adjustment (7-4) → FWD Mode Tape Path Adjustment (2) (7-5) → REV Mode Tape Path Adjustment (7-6, (7-6-1, 7-6-2)) → Tape Path Adjustment Around Pinch Roller (7-7-1) → Video Tracking Adjustment (check). (7-7-1)
• Threading Motor	Gear Box Position Adjustment. (5-3-2)
• Reel Motor	FWD Torque Adjustment (6-3) → REV Torque Adjustment (6-4) → Still Speed Adjustment. (9-11-1)
• CTL. PB Head	CTL. PB Head Height/Azimuth/Zenith Adjustment (7-7-2) → Tracking Adjustment (check). (7-7-1)
• Audio/CTL Head	Audio Head Height Adjustment (7-7-3) → Audio Head Azimuth Adjustment (7-7-5) → Video Tracking Adjustment (7-7-1) → Audio Head Height Adjustment (7-7-3) → Audio Head Azimuth Adjustment (7-7-5) → Audio Head Phase Adjustment (7-7-6) → Audio/CTL Head Position Adjustment (7-7-7) → Audio System Alignment. (10-1 ~ 10-11)

Replacement Parts	Adjustment Items
• Drum Assembly	→ Tracking Adjustment (7-7, (7-7-1 ~ 7-7-7)) → FF and REW Tape Path Adjustment (7-1) → FWD Mode Tape Path Adjustment (7-4) → REV Mode Tape Path Adjustment (7-5) → Video Head Dihedral Adjustment (7-8) → Drum AFC Bias Adjustment (9-7) → Drum AFC Transient Adjustment (9-8) → Drum Lock (9-9) Phase Adjustment → Switching Position Adjustment. (9-10)
• Upper Drum Assembly	→ Upper Drum and Eccentricity Adjustment (4-1) → Tracking Adjustment (7-7, (7-7-1 ~ 7-7-7)) → FF and REW Tape Path Adjustment (7-1) → FWD Mode Tape Path Adjustment (7-4) → REV Mode Tape Path Adjustment (7-5) → Video Head Dihedral Adjustment (7-8) → PB RF Amplifier Adjustment (11-1, (11-1-1 ~ 11-1-5)) → Record Amplifier Adjustment. (11-4, (11-4-1 ~ 11-4-3))

REPLACEMENT



## SECTION 5

### LINK AND DRIVE SYSTEM ALIGNMENT

#### 5-1. REEL TABLE SYSTEM ADJUSTMENT

##### 5-1-1. Cassette Holder Position Adjustment

**Tool and equipment:**

Reel table height check base jig.  
Thickness gauge.


**Mode:** EJECT completion

**Check procedure:**

Check that the clearance between the base jig and the cassette holder meets the required specification while pushing lightly the reel table height check base jig marked (A), (B) and (C) toward the chassis.

**Adjustment procedure:**

Adjust the position of the cassette holder so that meets the required specification.

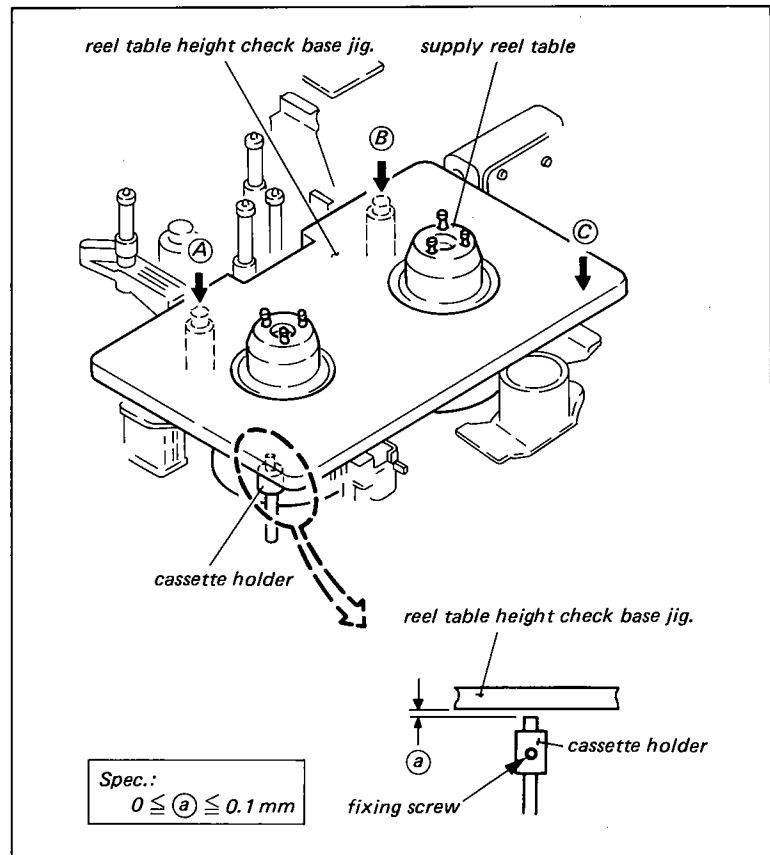

##### 5-1-2. Reel Table Height and Vertical Play Adjustment

- Since the reel table height from the chassis functions as the reference height in the entire tape thread and run system, it is requested that the reel table height adjustment should be attempted carefully, and deliberately.


**Mode:** EJECT completion

**Tool and equipment:**

Reel table height check base jig.  
Reel table height check jig.  
Slide vernier callipers or the equivalent.

**Check procedure:**

- (1) The probes of the reel table height check jig marked "SO" and "TO" can slide over the reel table, leaving a space between the jig and the reel table, while the probes marked "SX" and "TX" are blocked, and cannot slide over reel table.
  - Use the "SO" and "SX" probes for the supply reel table.
  - Use the "TO" and "TX" probes for the take-up reel table.

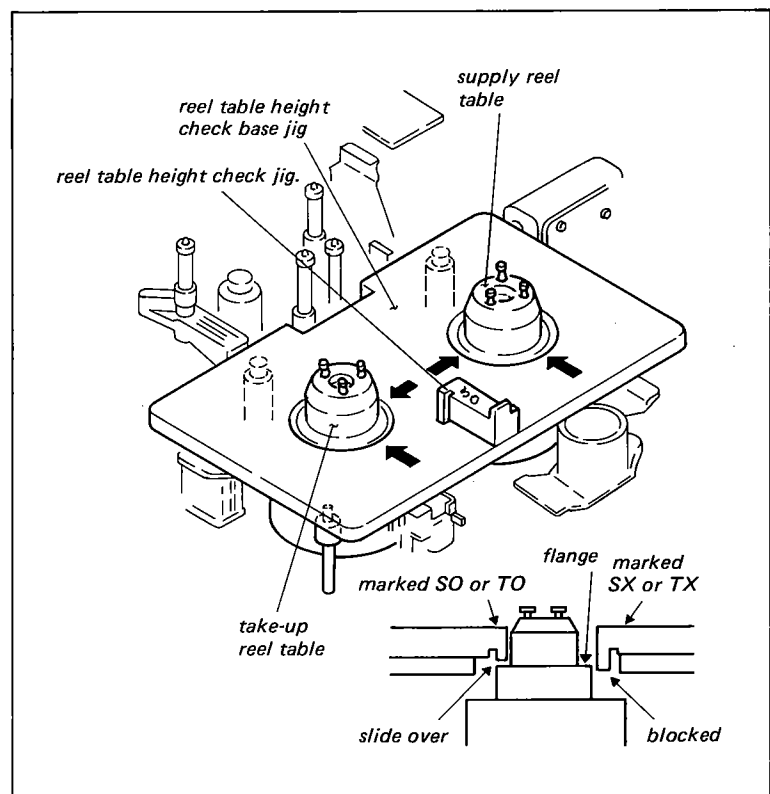

- (2) Fasten a reel table securing screw, and push up and down the reel table for inspection. Check that the vertical play meets the required specification.

**Adjustment procedure:**


- (1) Adjust height by the washer from under the reel table.
- (2) Adjust vertical play by the washer on top of the reel table.

**< NOTE >**



Apply a drop of SONY oil on the reel spindle as shown in figure, whenever the reel table is removed and is adjusted its height with washer.

Amount of oil should be one drop that is scooped by tip of 2 mm diameter twig such as pencil lead.

- 6 mm diameter washer
  - 0.5 mm thick, 3-701-444-21
  - 0.25 mm thick, 3-701-444-11
  - 0.13 mm thick, 3-701-444-01

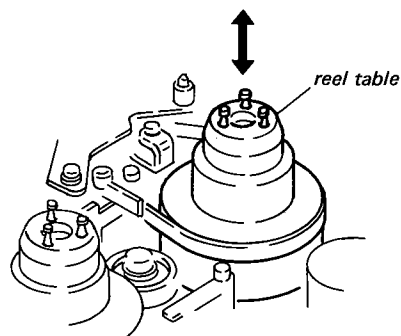

*Spec.:*  
vertical play  
0.17 mm ~ 0.38 mm

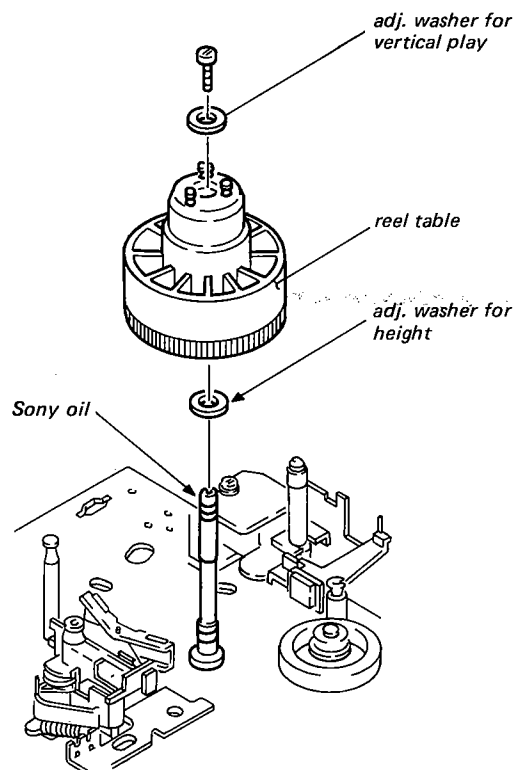

## 5-2. T DRAWER ARM ADJUSTMENT

### 5-2-1. T Drawer Arm EJECT Position Adjustment


**Mode:** Setting up FR-STOP mode without cassette tape, and press the EJECT button for setting up EJECT completion state.

**Check procedure:**

Check that the relationship between the lower flange of T tension regulator arm and the T drawer arm meets the required specification.

**Adjustment procedure:**

Adjust the position of drive link (B) ass'y by the flat blade screwdriver, 3 mm dia. so that meets the required specification.

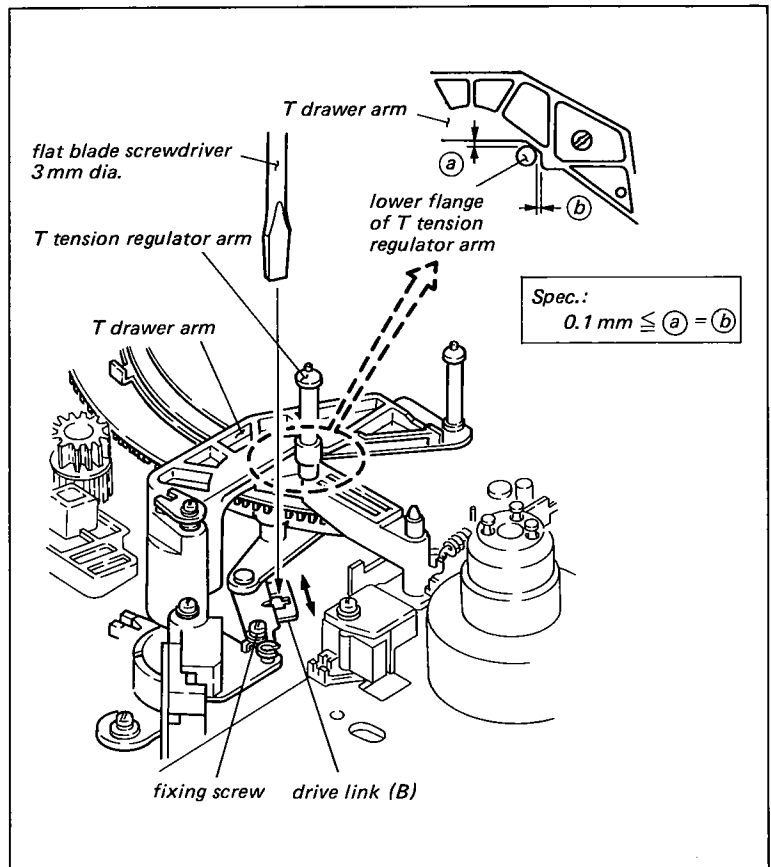

### 5-2-2. Unthread-end Switch Position Adjustment

**Tool and equipment:**


Black colored vinyl tape (1 cm x 1.5 cm)

**Preparation:**

- (1) Turn the POWER off in the FR-STOP mode.
- (2) Remove the FR detector block, and cover the D2 photo-interrupter (FR-UNTHREAD END Detector) by the black colored vinyl tape. (Put the FR detector in the FR-STOP mode constantly.)


**Check procedure:**

- (1) Turn POWER on and rotate the pulley of gear box block in the clockwise direction with finger.
- (2) While the relationship of the T drawer arm and the T tension regulator arm is shown in the figure, check that a energized noise of the take-up brake solenoid is heard in this moment.

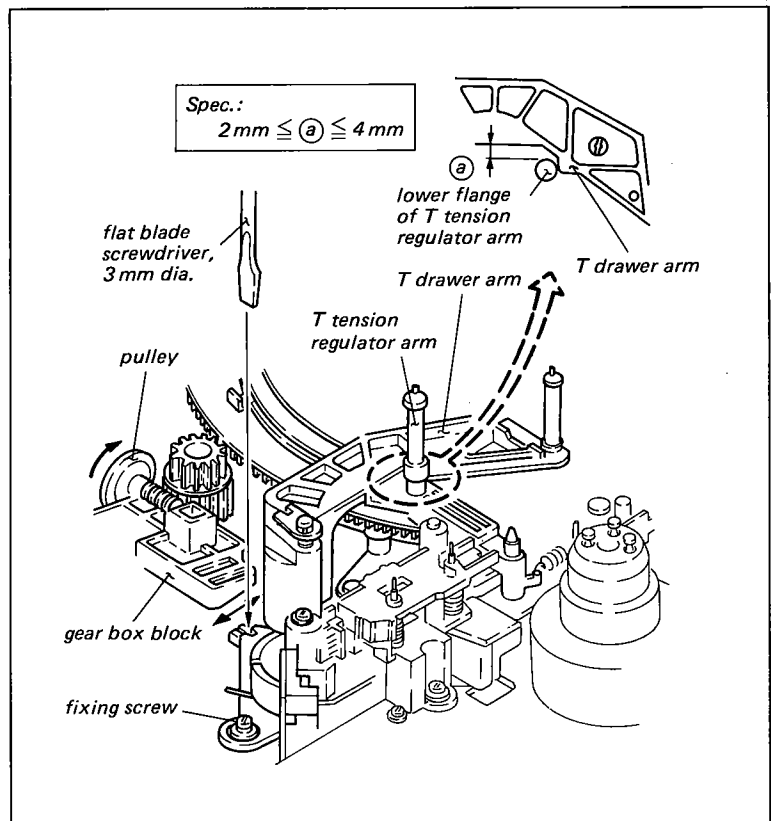

**Adjustment procedure:**

- (1) Adjust the position of the photo interrupter holder by the flat blade screwdriver, 3 mm dia. so that meets the required specification.
- (2) Turn POWER off, and mount the FR detector block after peel off the black colored vinyl tape.
- (3) Adjust the FR detector block mounted position. (sec. 5-3-4.)
- (4) Hook the spring on the FR detector block from the pinch lever block.

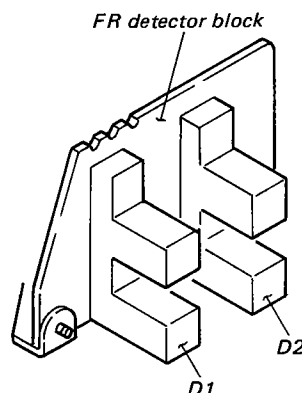**5-3. THREADING SYSTEM ADJUSTMENT****5-3-1. Threading Ring Rotation Adjustment**

- This adjustment is required only when the threading ring is replaced or removed.
- If the threading ring is left unadjusted to have narrower clearance, the ring rotation becomes heavy, or if left to have wider clearance, tape run during threading, FWD, and REV modes will be unstable.

**Mode:** Check mode; EJECT completion/threading/unthreading  
Adjustment mode; EJECT completion

**Check procedure:**


- (1) Check that the horizontal play meets the required specification when the threading ring is pushed in the direction of the arrow in the EJECT completion mode.
- (2) Check that the rotation of the threading ring into the threading and unthreading modes are smooth.

**Adjustment procedure:**

- (1) Put the machine into the EJECT completion mode.
- (2) Adjust the position of the ring roller (C) so that meets the required specification.

**Adjusting procedure;**

- Insert a 0.3 mm thick paper between the threading ring and the ring roller (C).
- Paper of this service manual is 0.1 mm thick so that the three fold becomes 0.3 mm thick.

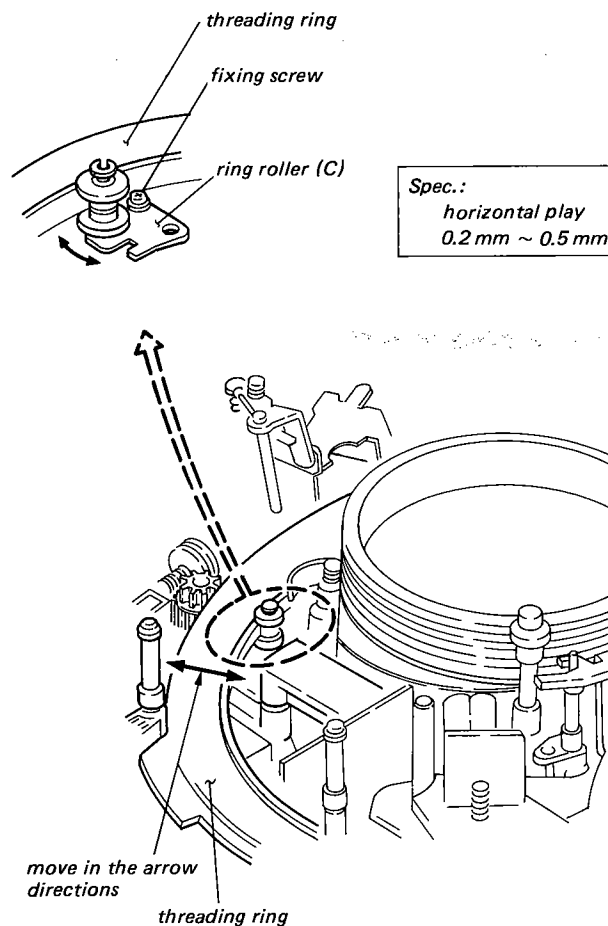



### 5-3-2. Gear Box Position Adjustment

- It is required that the sec. 5-3-1 threading ring rotation adj. is checked to be correct or properly adjusted before initiating this adjustment.


**Mode:** After completion of EJECT, turn the pulley 1/2 to 1 revolution in the direction of Arrow C in order to push out the Threading.

**Check procedure:**

- In order to make them easier to see during the Adjustment, mark the two lines on the top surface of the gear with a black felt tip pin.
- Turn the pulley so that one of the lines is roughly parallel to the outer circumference of the Threading Ring.
- Check to be certain that the relationship between the outer circumference of the Threading Ring and the Gear is within the Specifications.

**Adjustment procedure:**

- With the unit's EJECT completed and the pulley turned 1/2 to 1 revolution (as stated above under MODE), turn the pulley back and forth, as indicated by Arrows C and D, so that the Threading Ring and the Gear engage smoothly.
- Adjust the position of the Gear Box by moving it in the direction indicated by Arrow E until it is within the Specifications.
- Check the sec. 5-3-1 threading ring rotation adj.

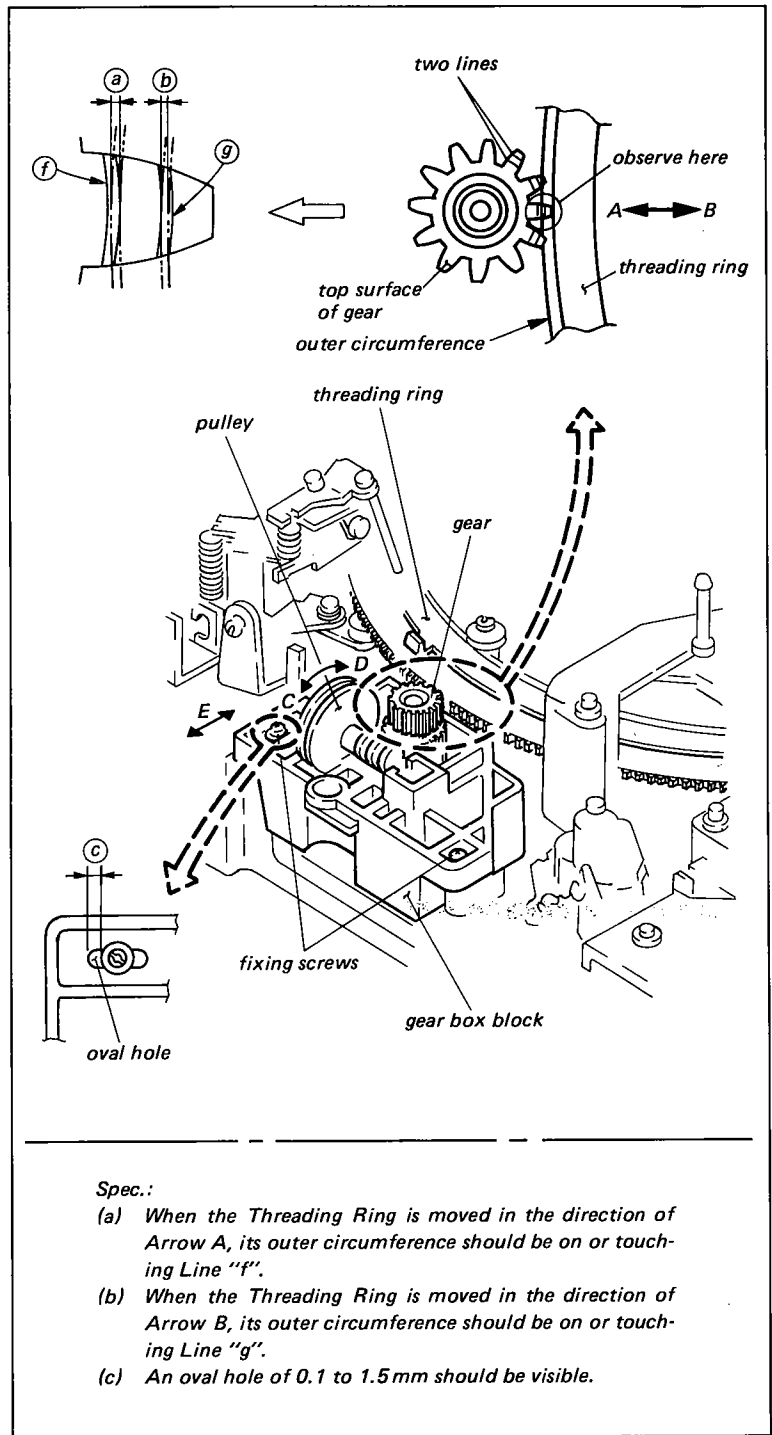

### 5-3-3. Pinch Roller Self-Alignment Adjustment

- If the pinch roller self-alignment is poor, pinch roller's position and inclination against the capstan are erroneous so that the tape will get sear, in the instance of pinch roller's pressing against the capstan.
- Perform the pinch roller pre-set adjustment after this adjustment.


Mode: PLAY

#### Check procedure:

- (1) Put the machine into PLAY mode without cassette.
- (2) Check that the relationship between the pinch roller arm (A) and (B) meets the required specification.

#### Adjustment procedure:

- (1) Put the machine into PLAY mode without cassette.
- (2) Loosen the fixing screw of sub ring stopper.
- (3) Turn the pulley of gear box block in the arrow direction with finger.
- (4) Push the sub ring stopper in the direction of the arrow and tighten the fixing screw.
- (5) Put the machine once into the FR-STOP mode, and confirm as check procedure.

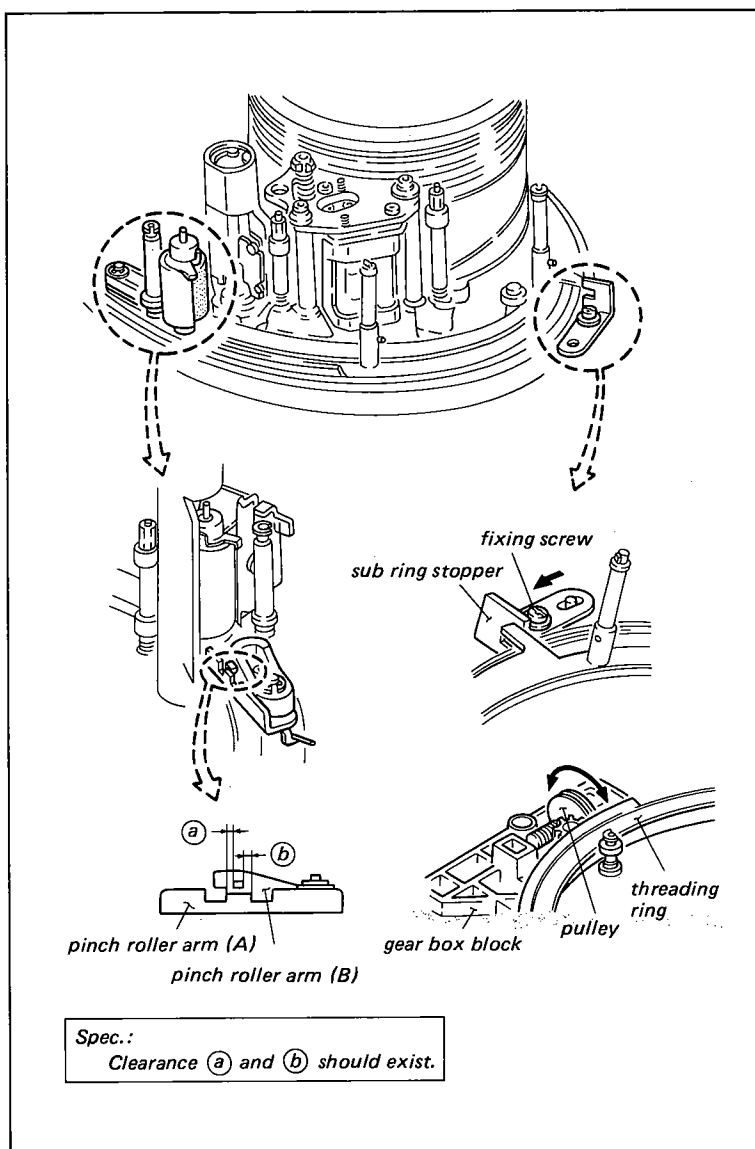


### 5-3-4. FR Detector Block Mounting Position Adjustment

- It is required that the sec. 5-3-1 threading ring rotation adj. is checked to be correct or properly adjusted before initiating this adjustment.

**Mode:** Adjustment mode; THREADING completion

**Adjustment procedure:**

- (1) Put the machine into THREADING completion mode and turn POWER off.
- (2) Press the FR detector block against the threading ring, and then return about 1 mm. (Don't return more than 1.5 mm) (Spec. 1)
- (3) Adjust the position of the FR detector block in the arrow direction so that meets the required specification 2.
- (4) Check that the clearance meets the required specification 1.

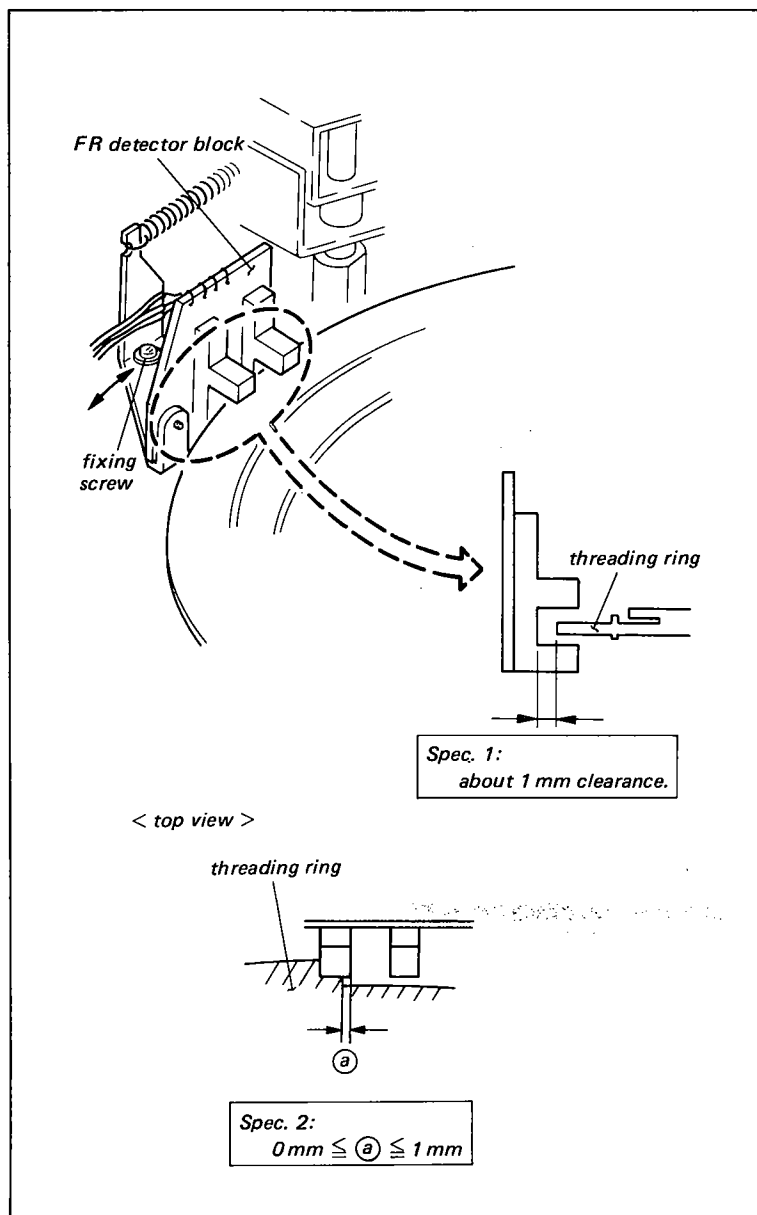

## 5-4. PINCH LEVER BLOCK ADJUSTMENT

### 5-4-1. Pinch Lever Pre-set Adjustment

- It is required that the threading ring rotation adj. and the pinch roller self-alignment adj. are checked to be correct or properly adjusted before initiating this adjustment.


**Mode:** Turn POWER off in PLAY mode.

**Check procedure:**

- Turn POWER off in PLAY mode. Check that the position of the pinch solenoid pin meets the required specification.
- Turn POWER on, and press the PLAY button after once unthreading. Check as procedure (1).

**Adjustment procedure:**

- Adjust the position of pinch solenoid within the specified value, refer to sec. 5-8-5.
- If not in step (1), perform the pinch roller self-alignment adjustment within the specified value, refer to sec. 5-3-3.
- If not in step (1) and (2), select the pinch lever pre-set adjustment link to the proper hole of the preset lever ass'y to meets the specification.

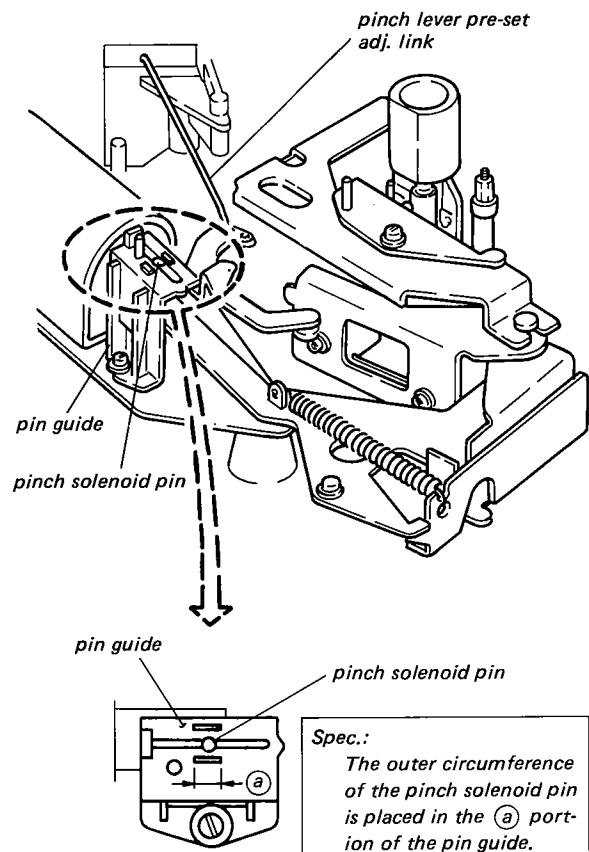

### 5-4-2. Pinch Roller Pre-set Adjustment

- It is required that the threading ring rotation adj. and the pinch roller self-alignment adj. are checked to be correct or properly adjusted before proceeding this adjustment.

**Mode:** Turn POWER off in PLAY mode.


**Tool and equipment:**  
Thickness gauge

**Check procedure:**

- Turn POWER off in PLAY mode. Check that the clearance between the upper portion of pinch roller and the capstan shaft meets the required specification.
- Turn POWER on, and press the PLAY button after once unthreading. Check as procedure (1).

**Adjustment procedure:**

- Turn POWER off. Move the position of the pre-set cam in the direction of the arrow so that meets the required specification.
- Confirm as check procedure in this step.

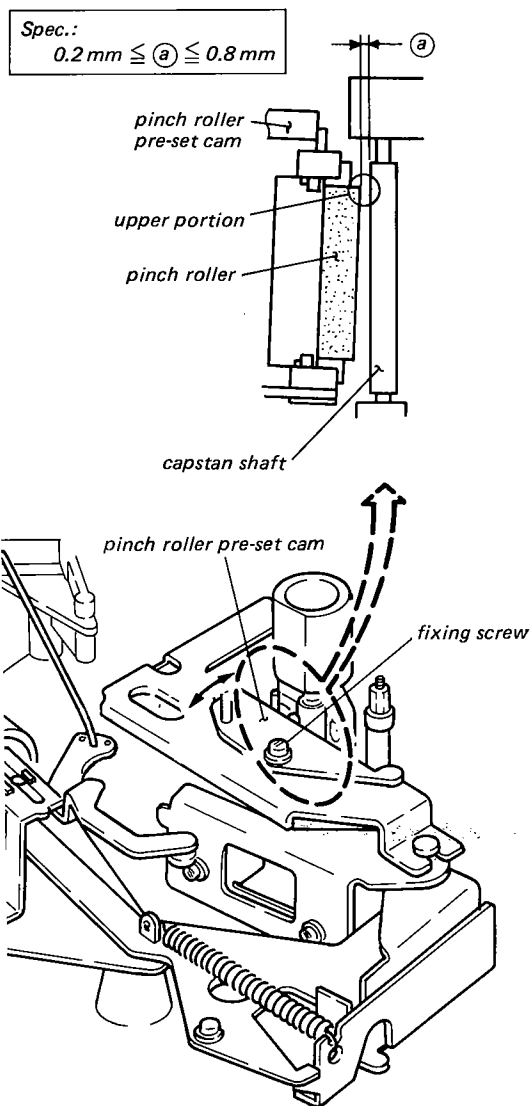

### 5-4-3. Pinch Solenoid Block Position Adjustment

**Mode:** PLAY


**Tool and equipment:**  
Thickness gauge

**Check procedure:**

- (1) Thread a tape and put the machine into PLAY mode.
- (2) Check that the clearance between the pinch lever A and B meets the required specification.
- (3) Repeat the unthreading/threading two or three times. Check as procedure (2).

**Adjustment procedure:**

- (1) Adjust the position of the pinch solenoid block by the flat blade screwdriver, 3 mm dia. in PLAY mode so that meets required specification.
- (2) Confirm as check procedure (2) and (3).

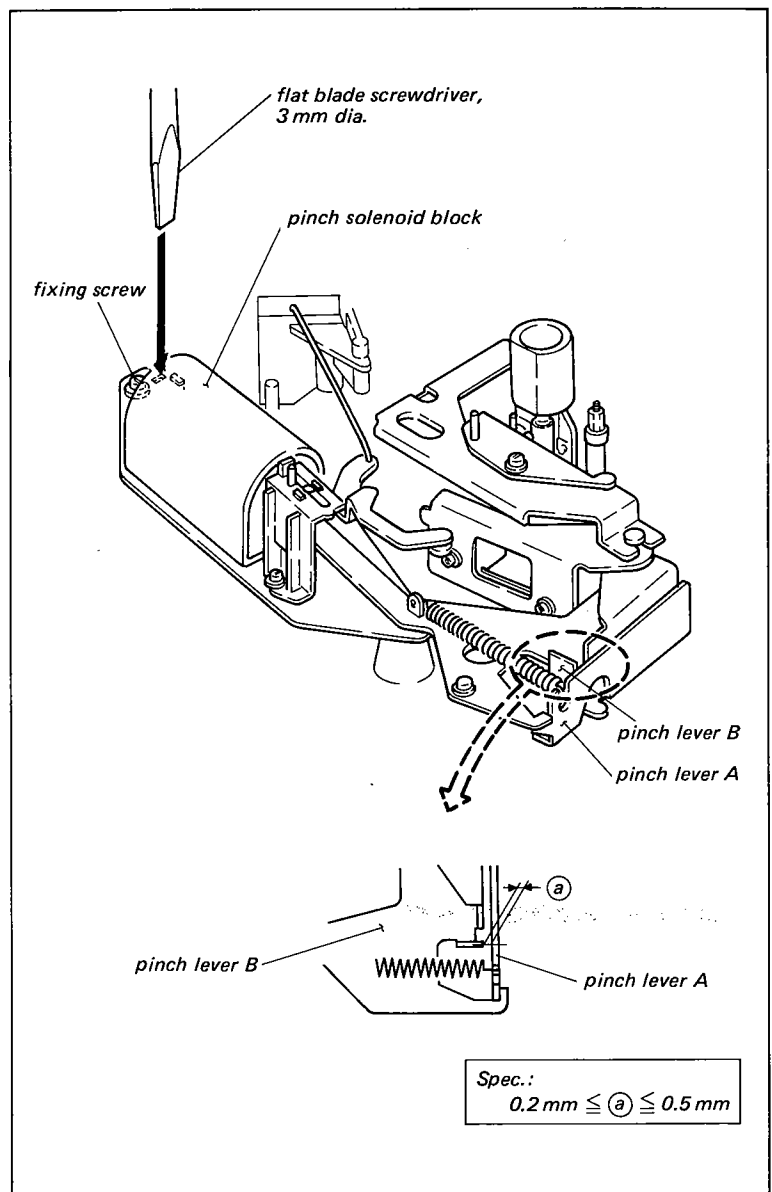

## 5-5. T TAPE SENSOR POSITION ADJUSTMENT

- There are two adjustments of the height and the clearance between a tape and LED in this section.

**Mode:** Thread a tape and put the machine into FR-STOP and PLAY modes.


**Tool and equipment:**  
Thickness gauge

### Check procedure:

- Thread a tape and put the machine into FR-STOP mode. Push the tape against the cassette tape side with finger as shown in figure. Check that the clearance between the top edge of a tape and the bottom side of T photo holder block (black colored plastic) meets the required specification (Spec. (1)).
- Next, when set to PLAY mode from FR-STOP mode, confirm \*(2) part of the T Tape sensor block within the specification B of SPEC (2).

### Adjustment procedure:

- Bend the \* marked position in figure with pliers so that meets the required specification. Confirm as check procedure (2).
- Set to PLAY mode from FR-STOP mode and adjust C block so that \*(2) part of T Tape sensor becomes within the specification A of SPEC (2).

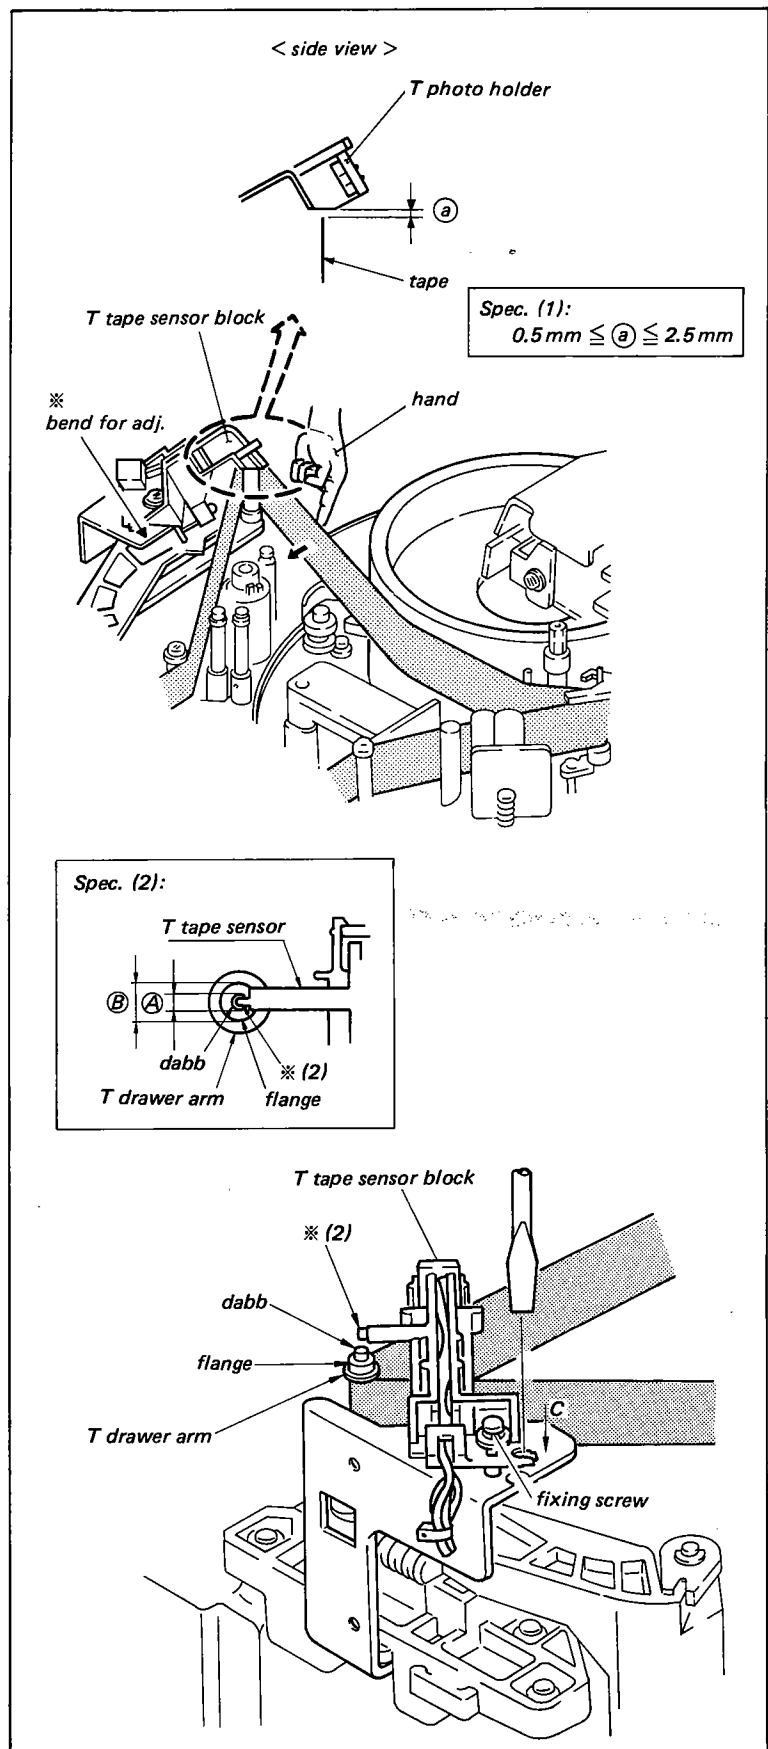

## 5-6. TENSION ARM SYSTEM ADJUSTMENT

### 5-6-1. S Drawer Roller Ass'y Limiter Adjustment


Mode: FR-STOP

**Check procedure:**

Check that the spring holder for S drawer guide, marked (B), of the S drawer arm ass'y is placed into notch of the S guide holder M, marked (A).

**Adjustment procedure:**

- (1) Adjust the position of the S drawer arm ass'y by the flat blade screwdriver, 3 mm dia. so that meets the required specification.

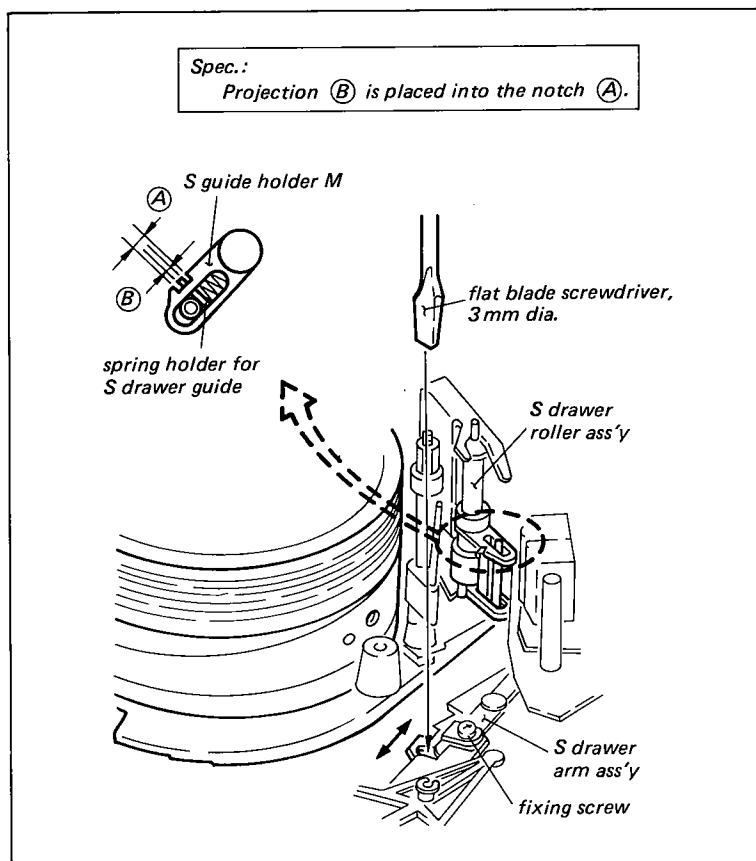

### 5-6-2. T Tension Regulator Operating Position Adjustment

Mode: FR-STOP

**Tool and equipment:**


Thickness gauge

**Check procedure:**


- (1) Push the T tension regulator arm lightly to the left with finger as far as it will go (in the arrow direction), and remove the finger gently.
- (2) Check that the clearance between T tension regulator arm and stopper meets the required specification.

**Adjustment procedure:**

- (1) Adjust the position of R brake lever by the flat blade screwdriver, 3 mm dia. so that meets the required specification.

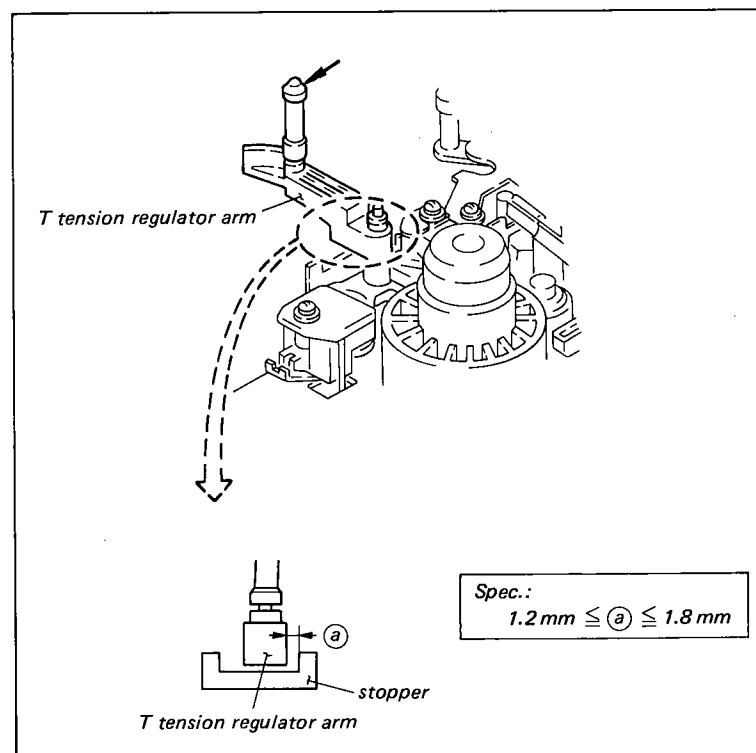



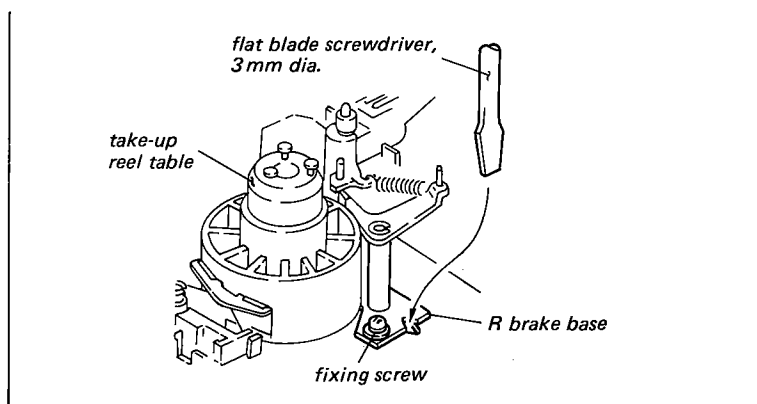

### 5-6-3. S Tension Regulator Operating Position Adjustment


**Mode:** FF

**Check procedure:**

- (1) Put the machine into FF mode without cassette tape.
- (2) Check that the edge of S tension regulator arm (B) meets the required specification.

**Adjustment procedure:**

- (1) Adjust the position of S tension regulator base so that meets the required specification.

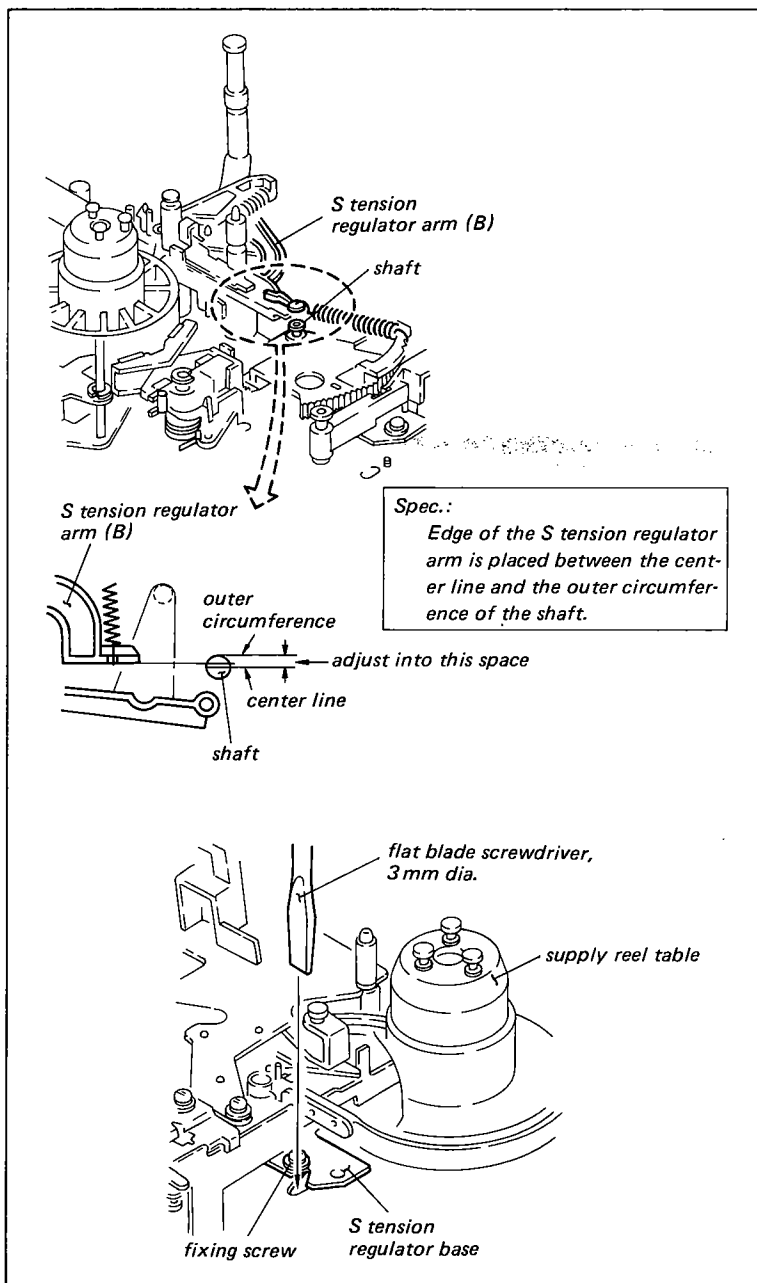

#### 5-6-4. Tension Detector Position Adjustment

**Mode:** FWD/SEARCH REV

**Tool and equipment:**  
DC voltmeter


**Preparation:** Connect dc voltmeter to TP17/SY-75 board.

**Check procedure:**

- (1) Put the machine into FWD mode without cassette tape.
- (2) Push the T tension regulator arm to the right with finger as far as it will go. Check that the dc voltage is more than 9 V.
- (3) Push the T tension regulator arm to the left with finger as far as it will go. Check that the dc voltage is less than 2 V.
- (4) Put the machine into SEARCH REV mode.
- (5) Push the S tension regulator arm to the right with finger as far as it will go. Check that the dc voltage is less than 2 V.
- (6) Push the S tension regulator arm to the left with finger as far as it will go. Check that the dc voltage is more than 9 V.

**Adjustment procedure:**

- (1) Adjust the position of tension detector so that meets the required specification.

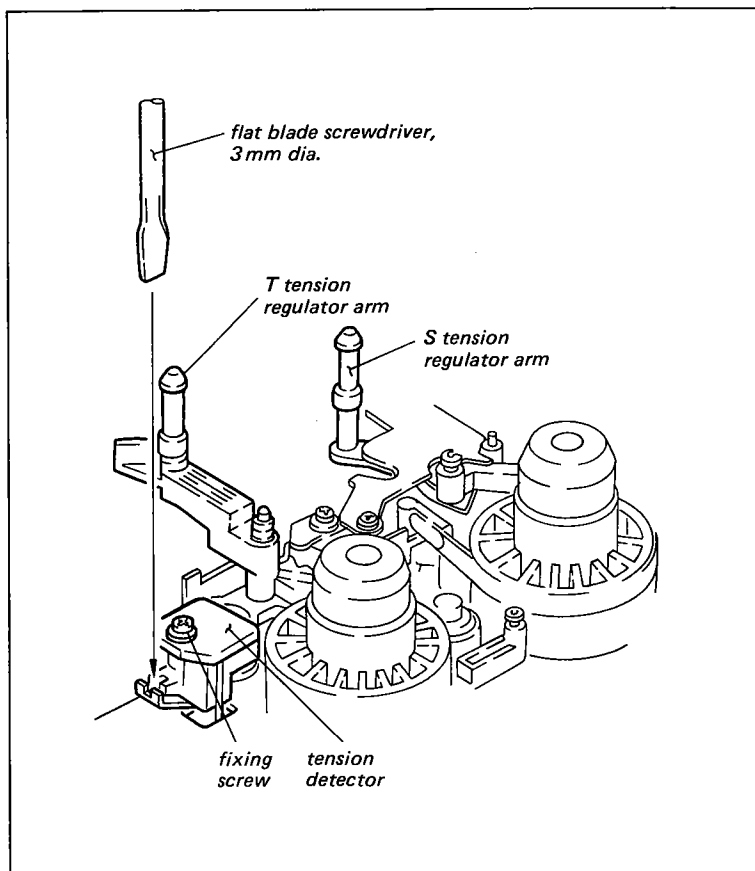

## 5-7. SOLENOID SYSTEM ADJUSTMENT


### 5-7-1. Search Solenoid Mounting Position Adjustment

- This adjustment is usually not required. But proceed with the following step only when the search solenoid is replaced or removed.

**Mode:** Remove the search solenoid block from the chassis.

**Adjustment procedure:**

Move the iron core into the fully energized position (indicated by the arrow as far as it will go). Adjust the mounting position of the search solenoid so that the overlap of the search FWD arm boss and the search base meet the required specification.

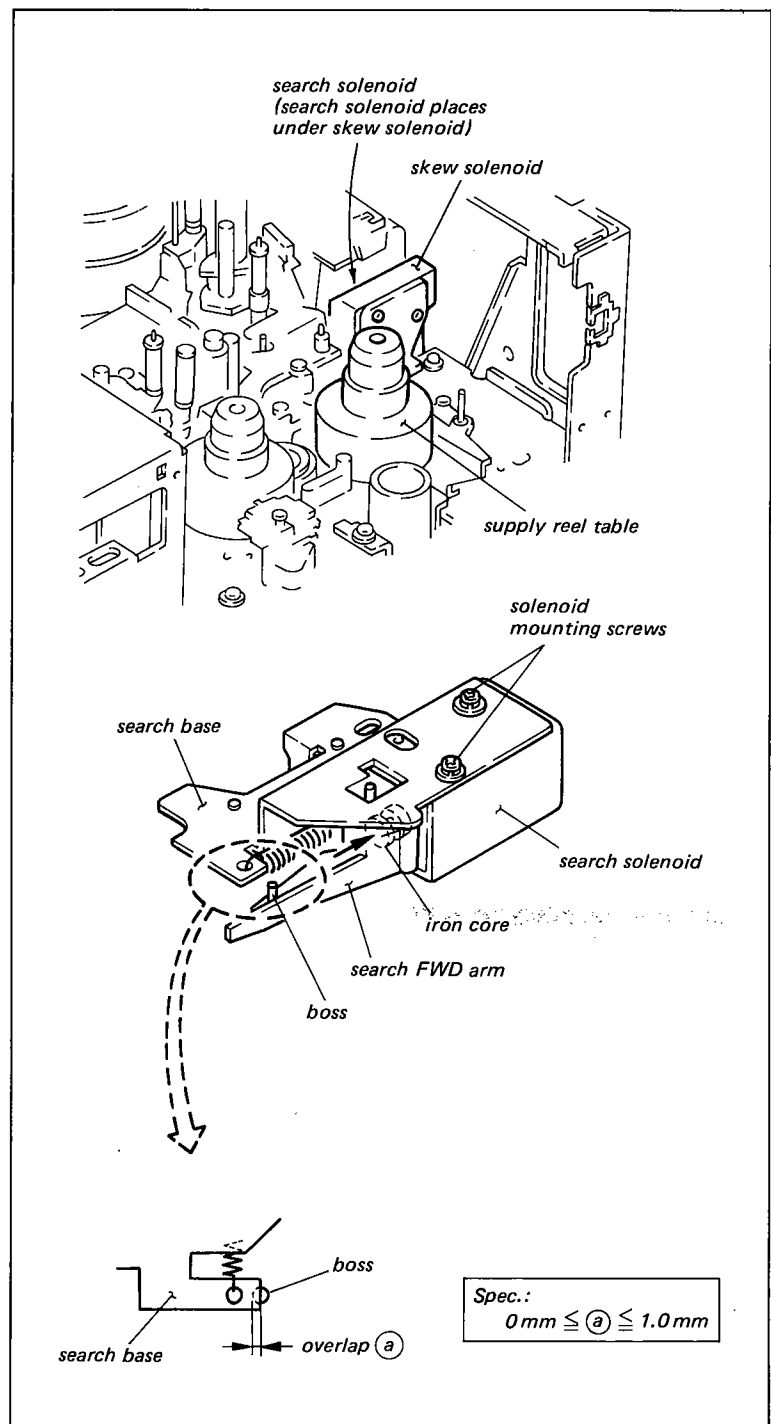

### 5-7-2. Skew Solenoid Mounting Position Adjustment


**Mode:** EJECT completion

**Check procedure:**

Check that the clearance between the skew lock claw and the skew arm B meets the required specification when the skew solenoid iron core is push in the direction of the arrow.

**Adjustment procedure:**

Adjust the position of the skew solenoid with a flat blade screwdriver, 3 mm dia. so that meets the required specification.

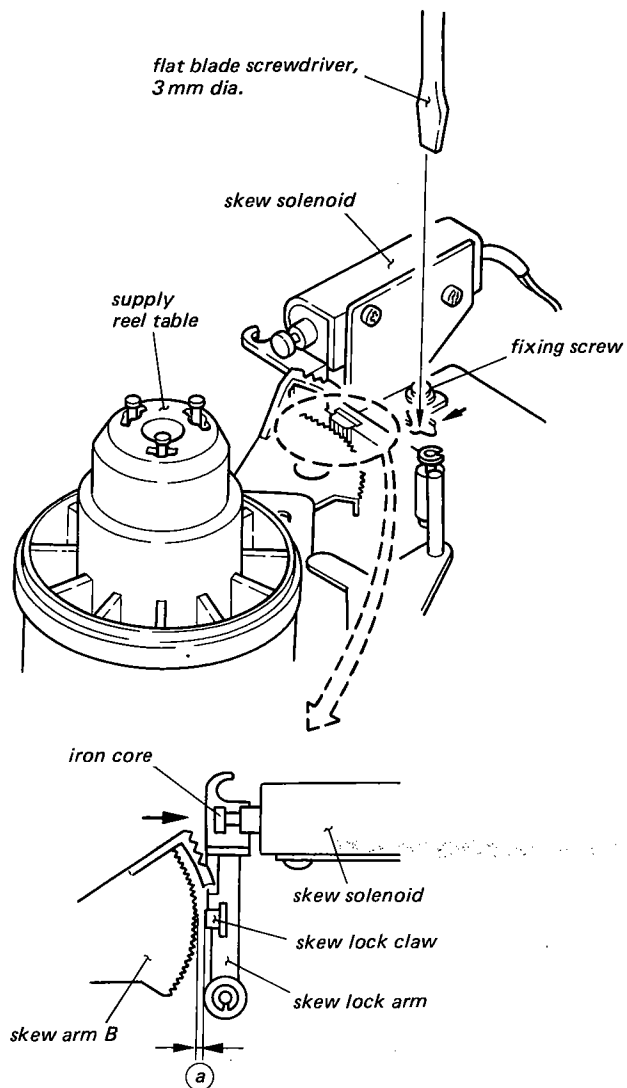

Spec.:

$$0.2 \text{ mm} \leq a \leq 0.5 \text{ mm}$$


### 5-7-3. T Idler Solenoid Position Adjustment

- This adjustment is performed when T idler solenoid is replaced or removed and F.FWD torque does not meet the specification.

**Mode:** F.FWD mode without cassette tape

**Adjustment procedure:**

- (1) Put the machine into F.FWD mode without cassette tape.
- (2) Loosen the T idler solenoid fixing screws about 1/2 turn.
- (3) Adjust the position of the T idler solenoid so that 0.01 ~ 0.1 mm clearance exists between the take-up reel table and the FF idler.
- (4) Note the hole to be provided for adjusting aim after proceeding the procedure (3).  
Confirm that where the edge of this solenoid is placed in this hole.
- (5) Move the solenoid in the arrow direction only one pitch from the position of procedure (4), and tighten the fixing screws.

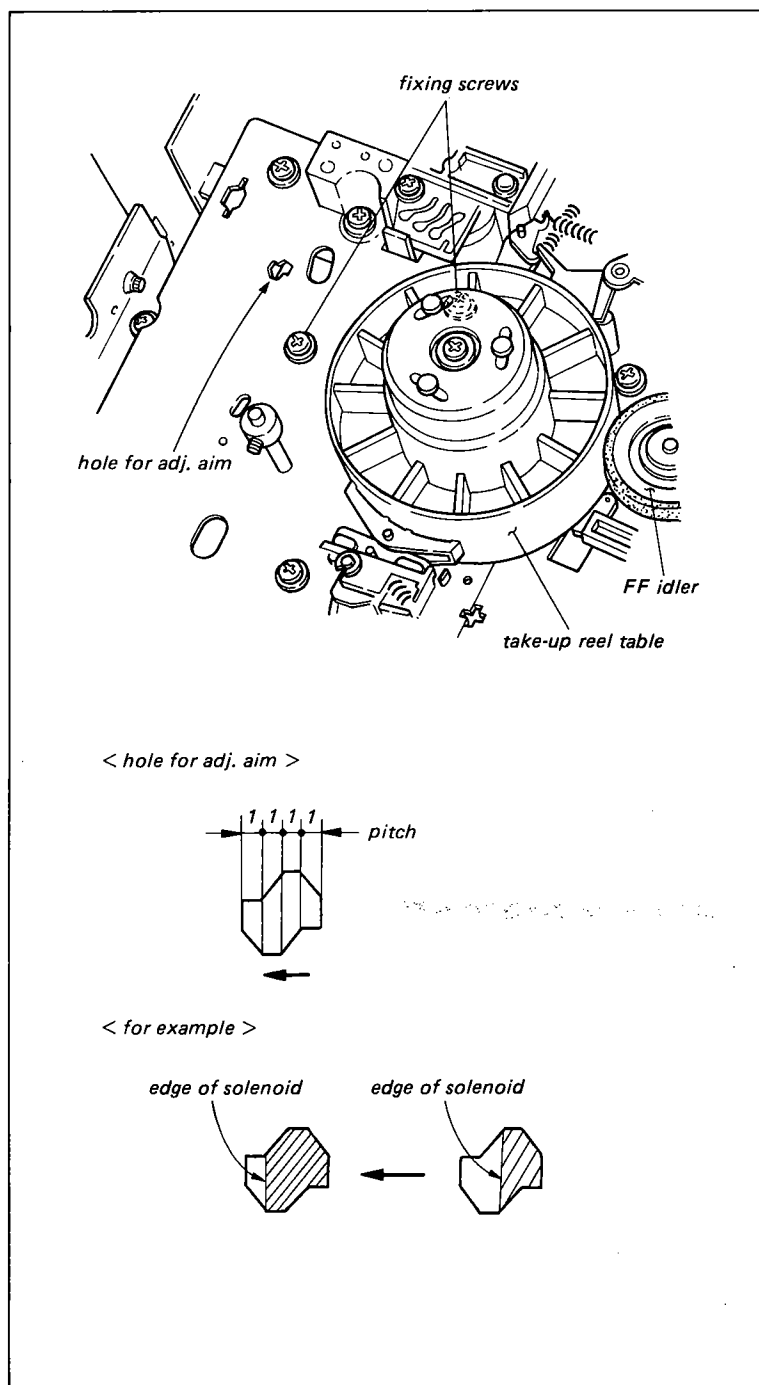


#### 5-7-4. S Idler Solenoid Position Adjustment

- This adjustment is required only when the supply idler solenoid is replaced or removed and the REW torque does not meet the specification.


**Mode:** REW mode without cassette tape

**Adjustment procedure:**


- (1) Put the machine into REW mode without cassette tape.
- (2) Loosen the supply idler solenoid fixing screws about 1/2 turn.
- (3) Adjust the position of the S idler solenoid so that 0.01 ~ 0.1 mm clearance exists between the supply reel table and the FF idler.
- (4) Note the hole to be provided for adjusting aim after proceeding the procedure (3).  
Confirm that where the edge of this solenoid is placed in this hole.
- (5) Move the solenoid in the arrow direction only one pitch from the position of procedure (4). Tighten fixing screws.

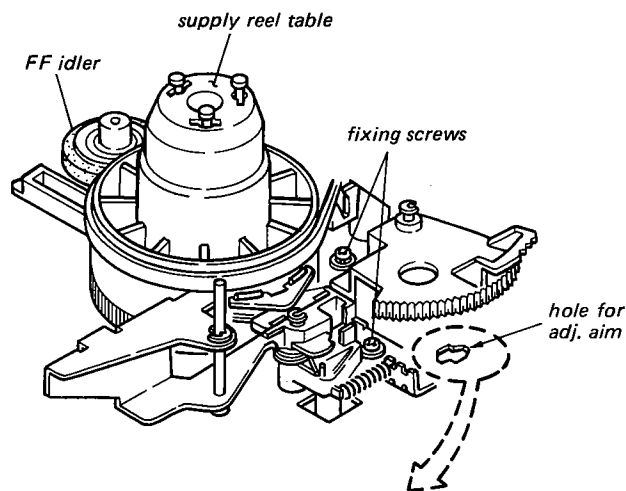

< hole for adj. aim >



< for example >

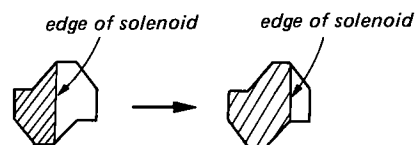


### 5-7-5. Pinch Solenoid Mounting Position Adjustment

- This adjustment is usually not required. Proceed with the following step only when the pinch solenoid is replaced or removed.

**Mode:** Remove the pinch solenoid block from the chassis.

**Adjustment procedure:**

Move the joint lever into the fully energized position (indicated by the arrow as far as it will go). Adjust the solenoid mounting position so that the outer circumference of solenoid pin meets the required specification.

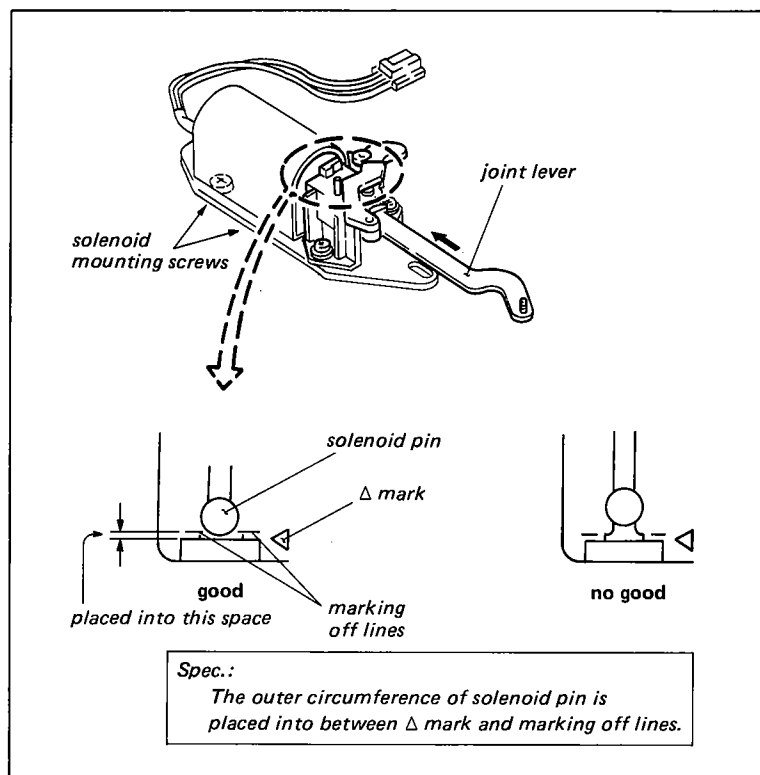

### 5-7-6. T Brake Solenoid Position Adjustment


**Mode:** REW mode without cassette tape

**Check procedure:**

Check that the relationship between the brake release arm and the brake arm meets the required specification.

**Adjustment procedure:**

Adjust the position of the T brake solenoid so that meets the required specification.

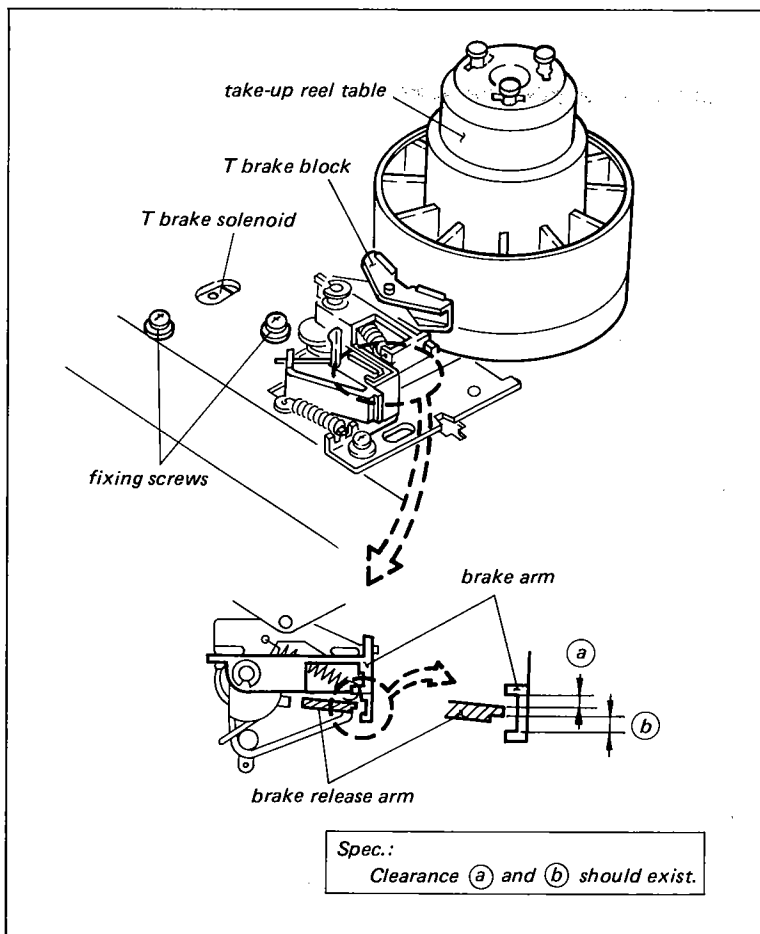

### 5-7-7. S Brake Solenoid Position Adjustment


**Mode:** REW mode without cassette tape

**Check procedure:**

Check that the relationship between the brake release arm and the brake arm meets the required specification.

**Adjustment procedure:**

Adjust the position of the S brake solenoid so that meets the required specification.

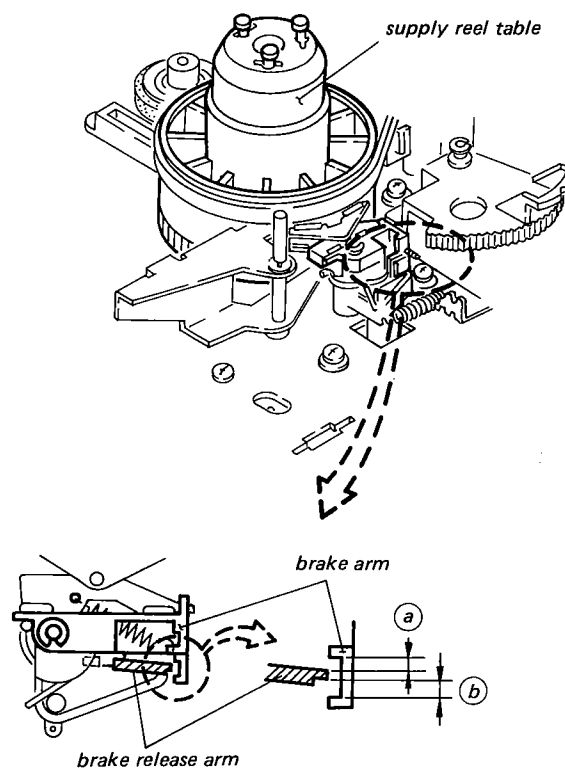

*Spec.:*

Clearance (a) and (b) should exist.



## 5-8. CASSETTE-UP COMPARTMENT ADJUSTMENT

- The cassette-up compartment has two photo-electrical switches. The on/off timing of these switches are adjusted as follows.

### 5-8-1. Cassette-in Switch Position Adjustment

#### Tool and equipment:

KCA type cassette tape.  
Tester.  
Thickness gauge.

- Preparation:**
- (1) Remove the cassette-up compartment from the chassis.
  - (2) Connect the plug of the harness for cassette-up compartment and the terminal on the CC-9 board with the jumper leads.

plug of harness (CN1)	terminal on CC-9 board
4pin (5 V) ←	4pin/CN1
5 or 2pin (GND) ←	5 or 2pin/CN1

- (3) Turn POWER on.

#### Check procedure:


- (1) Connect the tester to ② terminal on CC-9 board.
- (2) Insert a KCA type cassette tape slowly.
- (3) Check that the clearance between the front side of the cassette tape and the bracket of cassette-up compartment meets the required specification when the tester is turned "H" level (about 5 V).

#### Adjustment procedure:

- (1) Adjust the position of the cassette-in switch in the direction of the arrow so that meets the required specification.

#### Adjusting procedure;

Insert a 3.3 mm thick thickness gauge between cassette tape and bracket. Adjust the position of the cassette-in switch so that the tester is turned to "H" in this position.

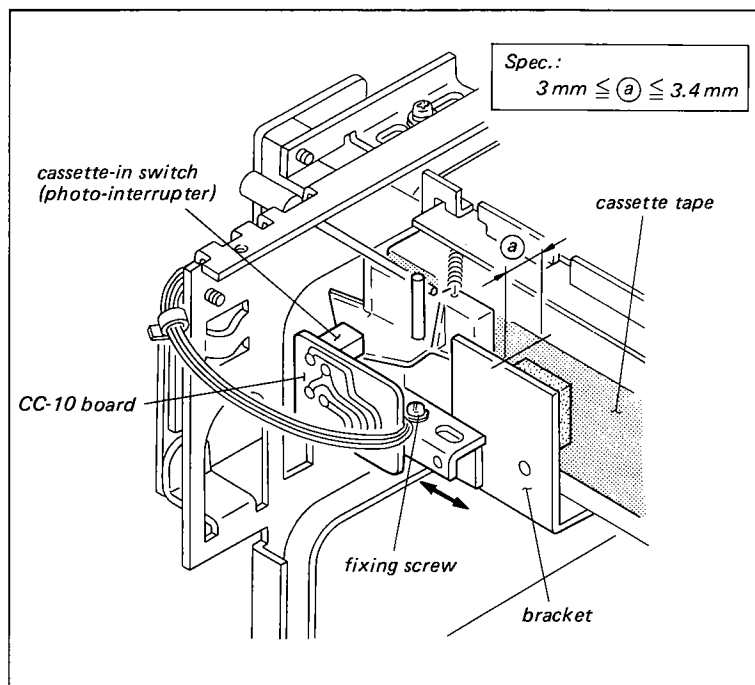

## 5-8-2. Cassette-down Switch Position Adjustment

### Tool and equipment:

Tester

- Preparation**
- (1) Remove the cassette-up compartment from the chassis.
  - (2) Connect the plug of the harness for cassette-up compartment and the terminal on CC-9 board with the jumper leads.

plug of harness (CN1)	terminal on CC-9 board
4pin (5 V) ←	4pin/CN1
5 or 2pin (GND) ←	5 or 2pin/CN1

- (3) Turn POWER on.

### Check procedure:


- (1) Connect the tester to ⑤ terminal on CC-9 board.
- (2) Turn the white colored gear on the right side of the cassette-up compartment in the clockwise direction.
- (3) Check that the clearance between the roller and the guide meets the required specification.

### Adjustment procedure:

- (1) Adjust the position of the cassette-down switch in the direction of the arrow so that meets the required specification.

#### Adjusting procedure;

Turn the gear on the right side so that the clearance between the roller and the guide is 2.2 mm clearance. Adjust the position of the cassette-down switch so that the tester is turned to "H" in this position.

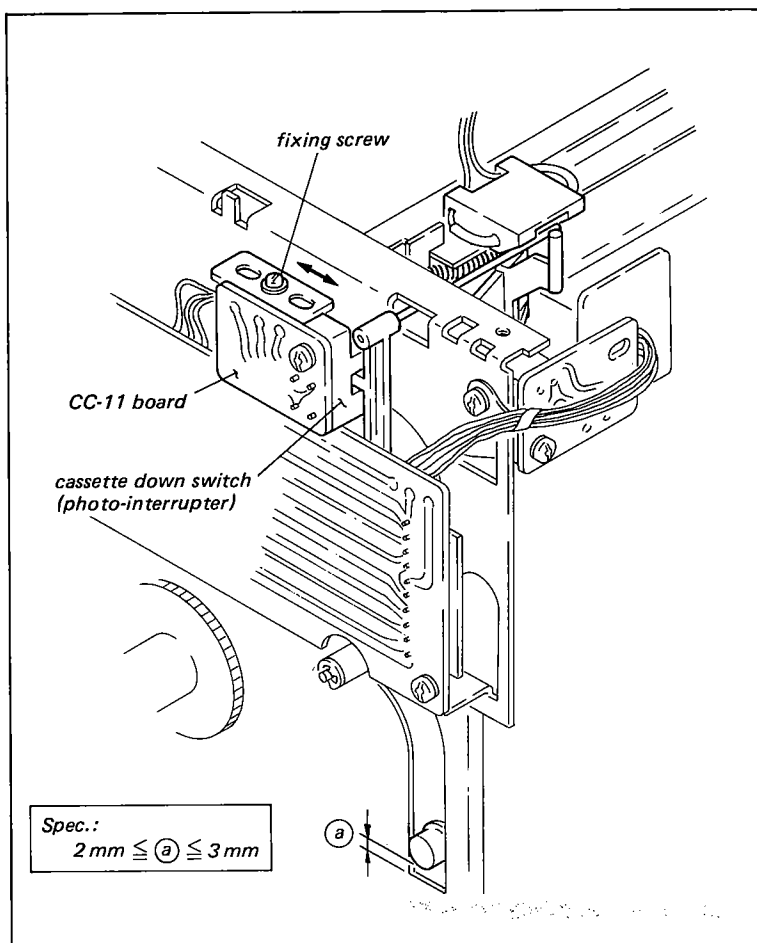


## 5-9. LEAF SPRING POSITION ADJUSTMENT

### Check procedure:

- (1) Turn on POWER. Put the machine into the EJECT mode after put into the PLAY mode once.
- (2) Turn the gear box pulley with finger so that the edge of the T drawer arm is placed into the center of the shaft as shown in figure.
- (3) Check that the relationship between leaf spring and pinch roller shaft meets the required specification 1.
- (4) Put the machine into the EJECT completion mode. Check that the clearance between leaf spring and pinch roller.

### Adjustment procedure:

- (1) Adjust the position of the leaf spring so that meets the required specifications.

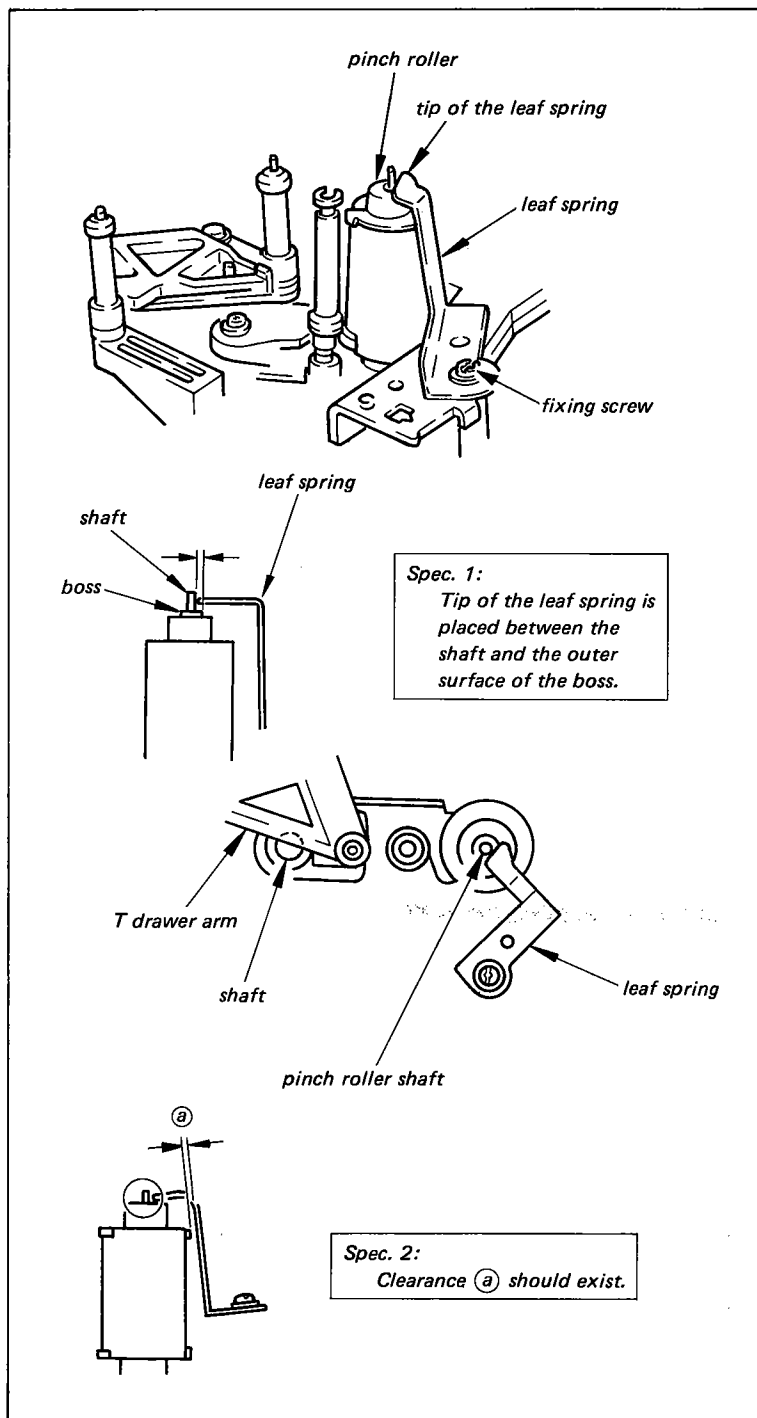

## 5-10. PINCH LEVER RIGHT ANGLE ADJUSTMENT

This adjustment is precisely factory-calibrated before shipment so that no adjustment is required except the pinch lever and the capstan shaft replacement.

**Tool** : Pinch lever adjustment jig


**Mode** : EJECT completion

**Check procedure:**

- (1) Install the pinch lever adjustment jig taking care not to give scar on the capstan.
- (2) Push the pinch lever until V-shaped ditch of the pinch lever contacts the semicylindrical portion of the jig lightly. Check that the two lamps of the jig light at the same time.

**Adjustment procedure:**

- (1) Loosen the two fixing screws of the pinch lever and adjust the V-shaped ditch to the correct position.
- (2) After this adjustment, tighten the fixing screws and check again.

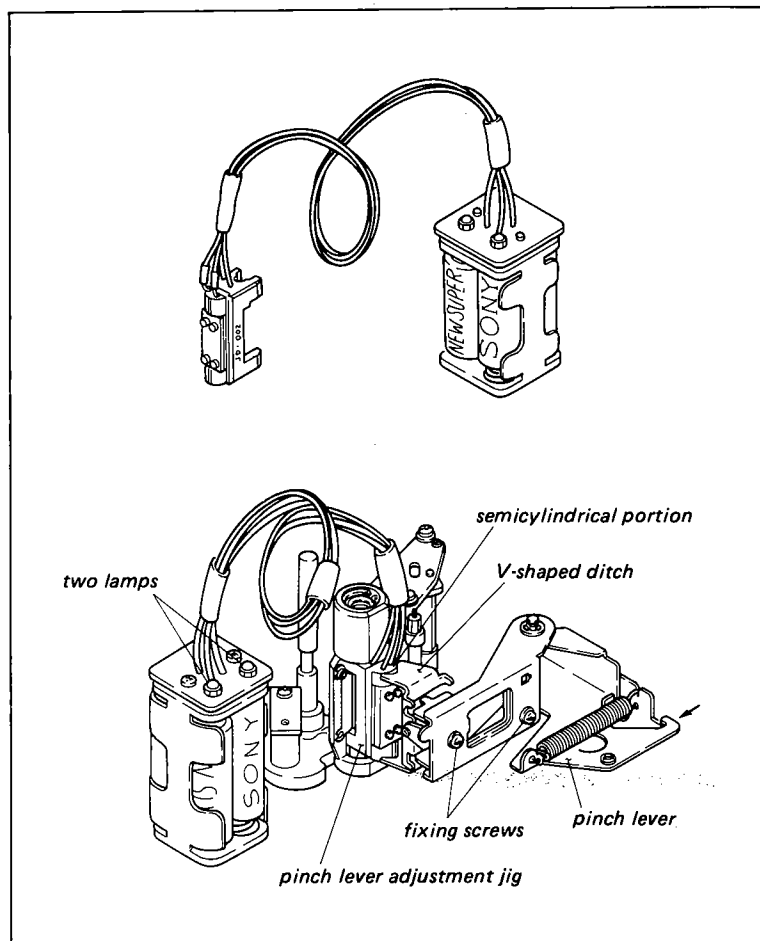

## SECTION 6

### BACK TENSION AND TORQUE ALIGNMENT

#### 6-1. BRAKE SYSTEM ADJUSTMENT

##### 6-1-1. S Brake Torque Adjustment

###### Tool and equipment:

Reel table torque measurement tape  
(100 mm dia.)  
Tension scale (200 g full scale).

**Mode:** EJECT completion/POWER off.

###### Check procedure:

- (1) Grasp the top of the supply reel table with finger. Check that the clearance between the brake arm and the lining holder meets the required specification (1) as shown in figure as it is turned clockwise direction approx. 30 degrees.
- (2) Install the jig tape on the supply reel table and hook a tension scale on an end of the jig tape. Pull out the tape at the constant speed of approx. 9.5 cm/sec. in the direction of the arrow. Check that the scale reading meets the required specification (2).


###### Adjustment procedure:

For spec. 1

- (1) Bend the brake block shaft toward the reel table or the opposite direction with finger.

For spec. 2

- (2) Clean the surface of the reel table with cloth moistened with cleaning fluid.
- (3) If the scale reading does not meet the specification (2), replace the lining holder and check again.
- (4) If not in step (2), replace the reel table and check again.

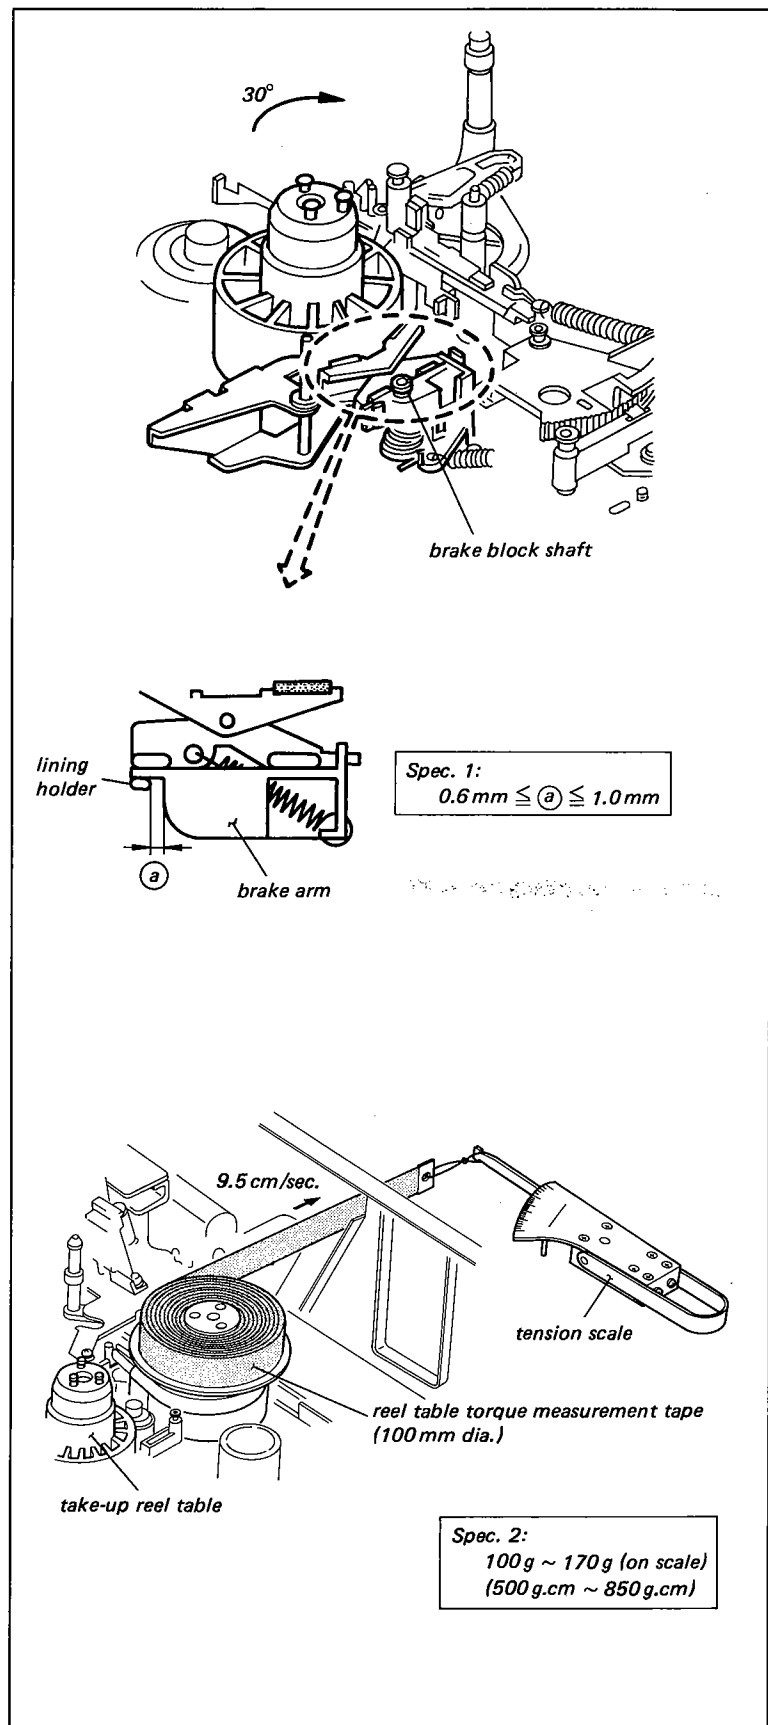

## 6-1-2. T Brake Torque Adjustment

### Tool and equipment:

Reel table torque measurement tape  
(100 mm dia.)  
Tension scale (200 g full scale).

Mode: EJECT completion/POWER off.

### Check procedure:

- (1) Grasp the top of the take-up reel table with finger. Check that the clearance between the brake arm and the lining holder meets the required specification (1) as shown in figure as it is turned clockwise direction approx. 30 degrees.
- (2) Install the jig tape on the take-up reel table and hook a tension scale on an end of the jig tape. While pushing the T tension regulator arm to the left as far as it will go, pull out the tape at the constant speed of approx. 9.5 cm/sec. in the direction of the arrow. Check that the scale reading meets the required specification (2).



### Adjustment procedure:

For spec. 1


- (1) Bend the brake block shaft toward the reel table or the opposite direction with finger.

For spec. 2

- (2) Clean the surface of the reel table with cloth moistened with cleaning fluid.
- (3) If the scale reading does not meet the specification (2), replace the lining holder and check again.
- (4) If not in step (2), replace the reel table and check again.

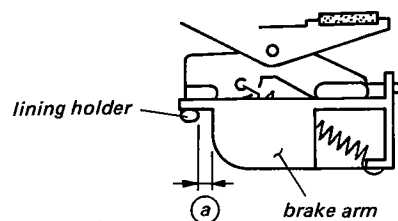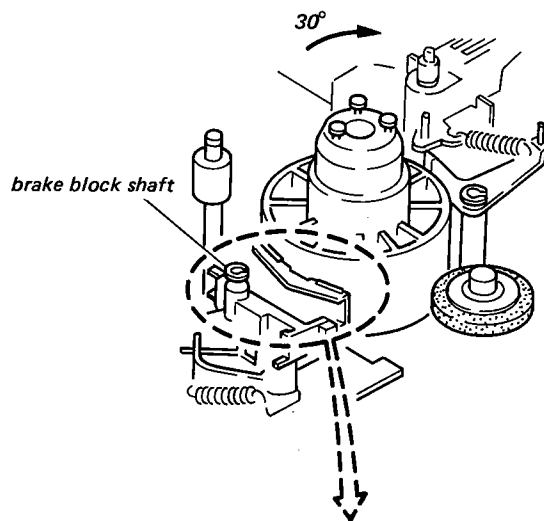

Spec. 1:  
 $0.6 \text{ mm} \leq a \leq 1.0 \text{ mm}$

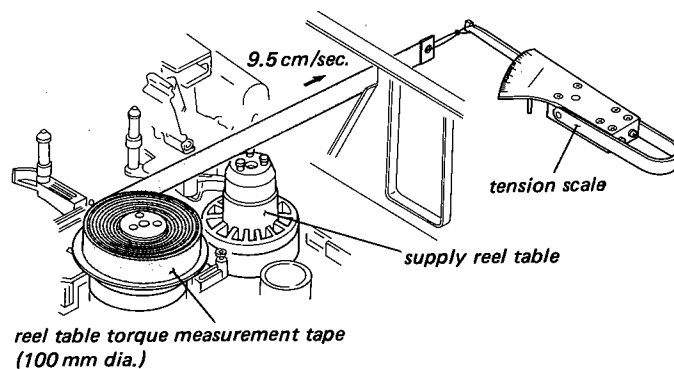

Spec. 2:  
100 g ~ 170 g (on scale)  
(500 g.cm ~ 850 g.cm)

### 6-1-3. REW Brake Torque Adjustment

#### Tool and equipment:

Reel table torque measurement tape  
(100 mm dia.)  
Tension scale (50 g full scale)


Mode: REW

#### Check procedure:

- (1) Install the jig tape on the take-up reel table and hook a tension scale on an end of the jig tape.
- (2) Put the machine into the REW mode. Pull out the tape at the constant speed of approx. 9.5 cm/sec. in the direction of the arrow. Check that the scale reading meets the required specification.

#### Adjustment procedure:

- (1) If the scale reading does not meet the specification, replace the R brake ass'y and check again.
- (2) If not in step (1), replace the reel table and check again.

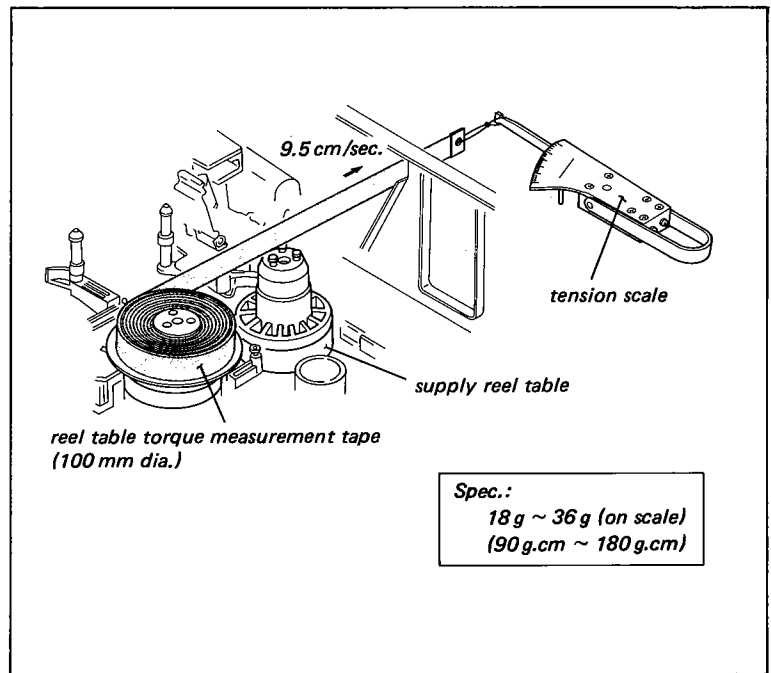

### 6-2. FF/REW TORQUE ADJUSTMENT

- It is required that the sec. 5-7-3 T idler solenoid position adj. and sec. 5-7-4 S idler solenoid position adj. are checked to be correct or properly adjusted before initiating this adjustment.

#### Tool and equipment:

Reel table torque measurement tape  
(100 mm dia.)  
Tension scale (500 g full scale).

Mode: FF and REW


#### Check procedure:

##### FF torque

- (1) Install the jig tape on the take-up reel table and hook a tension scale on an end of the tape. Pull out the tape.
- (2) Put the machine into FF mode. Let the tape pulled at the constant speed of approx. 9.5 cm/sec. check that the scale reading meets the required specification.

##### REW torque

- (3) Install the jig tape on the supply reel table and hook a tension scale on an end of the tape. Pull out the tape.
- (4) Put the machine into the REW mode. Let the tape pulled at the constant speed of approx. 9.5 cm/sec. Check that the scale reading meets the required specification.

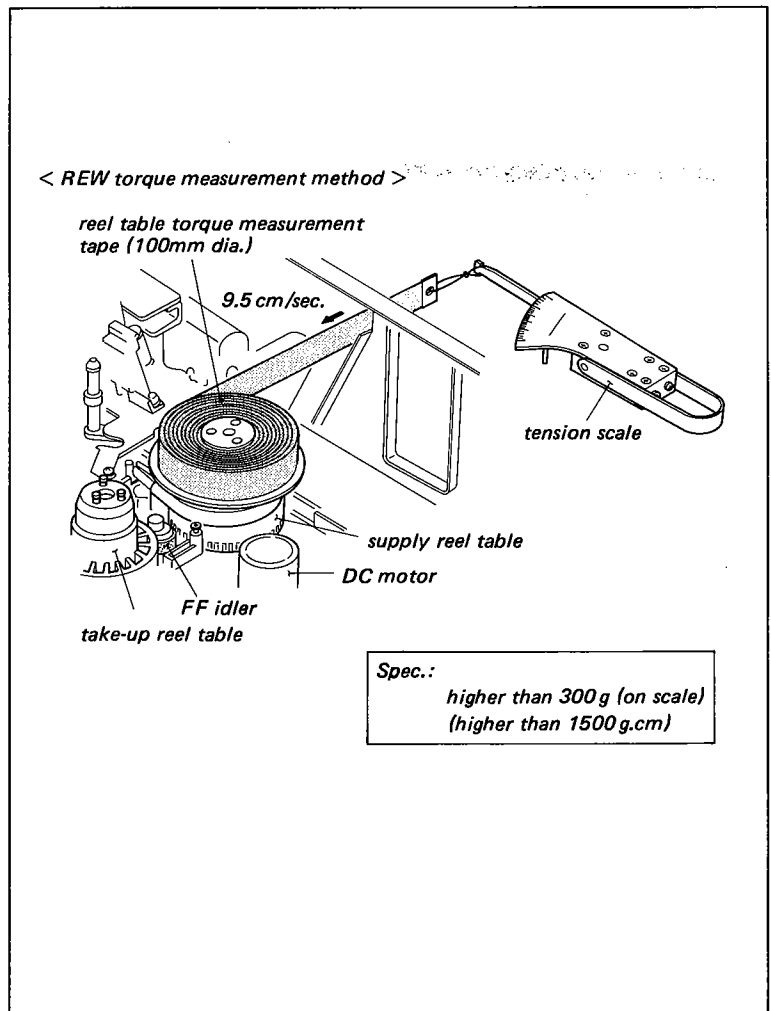

**Adjustment procedure:**

Both FF torque and REW torque are adjusted by the following adjustment procedures.

- (1) Clean the surface of the reel table, FF idler and belt with cloth moistened with cleaning fluid. Check the torque again.
- (2) If not in step (1), put the machine into FF or REW mode without cassette and check that the dc voltage at the terminals of dc motor is  $10.5\text{ V} \pm 1.5\text{ V}$  in the FF or REW mode. If the dc voltage is out of spec., check that the circuit operation of MR board operates correctly.
- (3) If not in steps (1) and (2), replace the reel table, FF idler and belt.

**6-3. FWD TORQUE ADJUSTMENT**


**Mode:** FWD/SEARCH FWD

**Check procedure:**

- (1) Install the KCS-20 cassette tape at the tape end portion.
- (2) Put the machine into the FWD mode. Check that the relationship between the T tension regulator arm and cassette tape meets the required specification.
- (3) Install the KCA-60 cassette tape at the tape end portion.
- (4) Put the machine into SEARCH FWD mode.
- (5) Check that the tape runs without slack around the T tension regulator arm.
- (6) Push the T tension regulator arm to the left as far as it will go, check that the tape slack is occurred around the T tension regulator arm.

**Adjustment procedure:**

- (1) Adjust RV-1 on MR-8 or MR-11A board meets the required specification in FWD mode.
- (2) Confirm as check procedures (3) ~ (6).

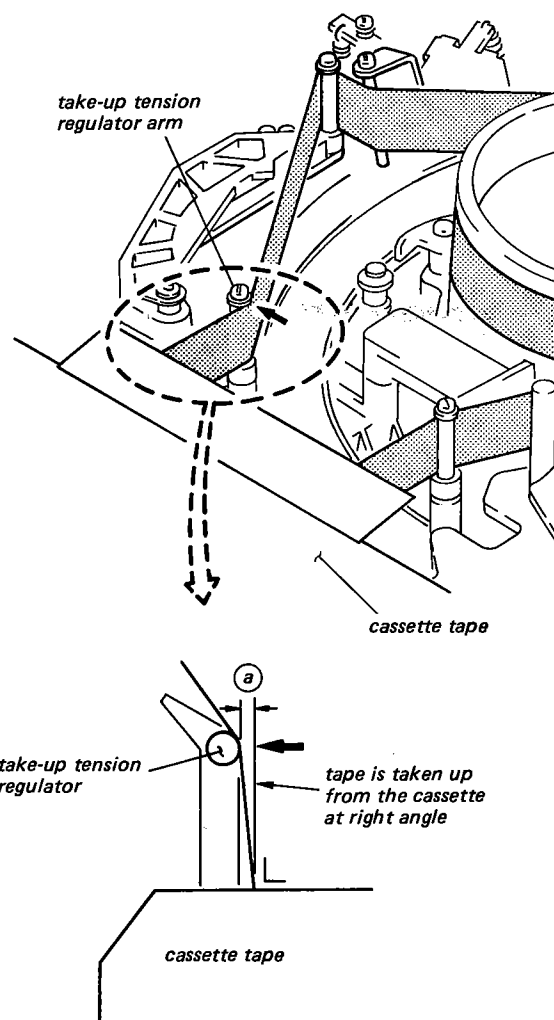

Spec.:  
 $0\text{ mm} \leq a \leq 2\text{ mm}$



#### 6-4. REV TORQUE ADJUSTMENT


**Mode:** SEARCH REV mode

**Check procedure:**

- (1) Install the KCS-20 cassette tape at the tape beginning portion.
- (2) Put the machine into SEARCH REV mode.
- (3) Check that the relationship between the boss of S tension regulator and the bracket of erase head base meets the required specification.

**Adjustment procedure:**

- (1) Adjust RV-2 on MR-8 or MR-11A board meets the required specification.

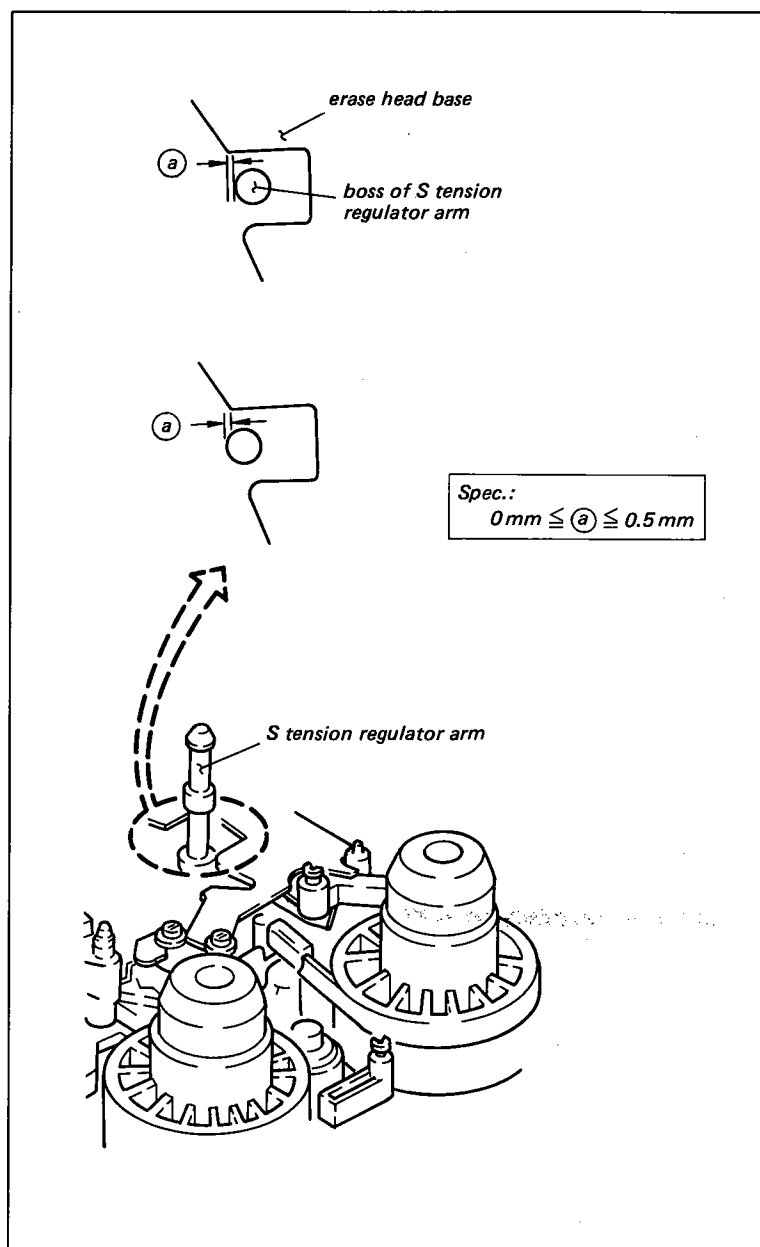

## 6-5. FF BACK TENSION ADJUSTMENT

- It is required that the sec. 5-6-3 supply tension regulator operating position adj. is checked to be correct or properly adjusted before initiating this adjustment.
- It is required that the sec. 6-6 FWD back tension adj. is performed after this adjustment.

### Tool and equipment:

Back tension adjustment jig.  
Reel table torque measurement tape  
(100 mm dia.)  
Tension scale (50 g full scale)


- Preparation:**
- (1) Turn POWER on in FR-STOP mode. (When POWER on, the S drawer roller moves to the FR-STOP position and put the machine into FR-STOP mode automatically.)
  - (2) Turn the pulley of gear box block in the clockwise direction viewing from the front panel with finger so that the S drawer roller places in front of the CTL PB head.
  - (3) Install the back tension adjustment jig.
  - (4) Install the jig tape on the supply reel table and thread the tape as shown in figure. Check that the tape does not curl at the flange of S drawer roller.
  - (5) Turn the pulley in opposite direction in step 2) so that the S drawer roller is engaged with the S holder.
  - (6) Hook a tension scale on an end of tape.

### Check procedure:

- (1) Press the FF button and put into FF mode.
- (2) Pull out the tape at the constant speed of approx. 9.5 cm/sec. in the arrow direction. Check that the scale reading meets the required specification.

### Adjustment procedure:

- (1) Adjust the position of the spring holder meets the required specification with flat blade screwdriver, 3 mm dia.
- (2) Check that the scale reading meets the required specification once refer to the check procedure.
- (3) Perform sec. 6-6 FWD back tension adjustment.

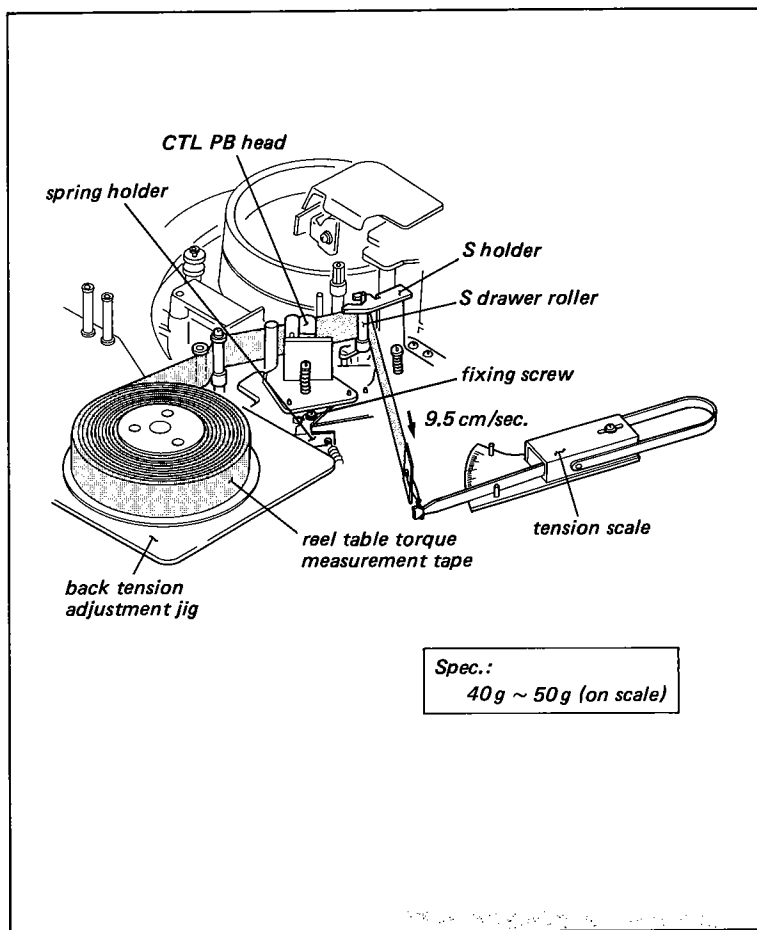

## 6-6. FWD BACK TENSION ADJUSTMENT

- It is required that the sec. 5-6-3 supply tension regulator operating position adj. and sec. 6-5 FF back tension adj. are checked to be correct or properly adjusted before initiating this adjustment.

### Tool and equipment:

Back tension adjustment jig.  
Reel table torque measurement tape  
(100 mm dia.)  
Tension scale (100 g full scale)


- Preparation:**
- (1) Push the skew arm in the arrow direction.
  - (2) Turn on the POWER and put the machine into the FR-STOP mode. (When turn on the POWER, the S drawer roller moves to the FR-STOP position and put the machine into the FR-STOP mode automatically.)
  - (3) Turn the pulley of gear box block in the clockwise direction viewing from the front panel with finger so that the S drawer roller places in front of the CTL PB head.
  - (4) Install the back tension adjustment jig.
  - (5) Install the jig tape on the supply reel table and thread the tape as shown in figure. Check that the tape does not curl at the flange on S drawer roller.
  - (6) Turn the pulley in opposite direction in step (3) so that the S drawer roller is engaged with the S holder.
  - (7) Hook a tension scale on an end of tape.

### Check procedure:

- (1) Press the PLAY button and put into PLAY mode.
- (2) Pull out the tape at the constant speed of approx. 9.5 cm/sec. in the arrow direction. Check that the scale reading meets the required specification.

### Adjustment procedure:

- (1) Select the proper spring hook of the skew arm B so that the scale reading meets the required specification.
- (2) After this adjustment, check again refer to check procedure.

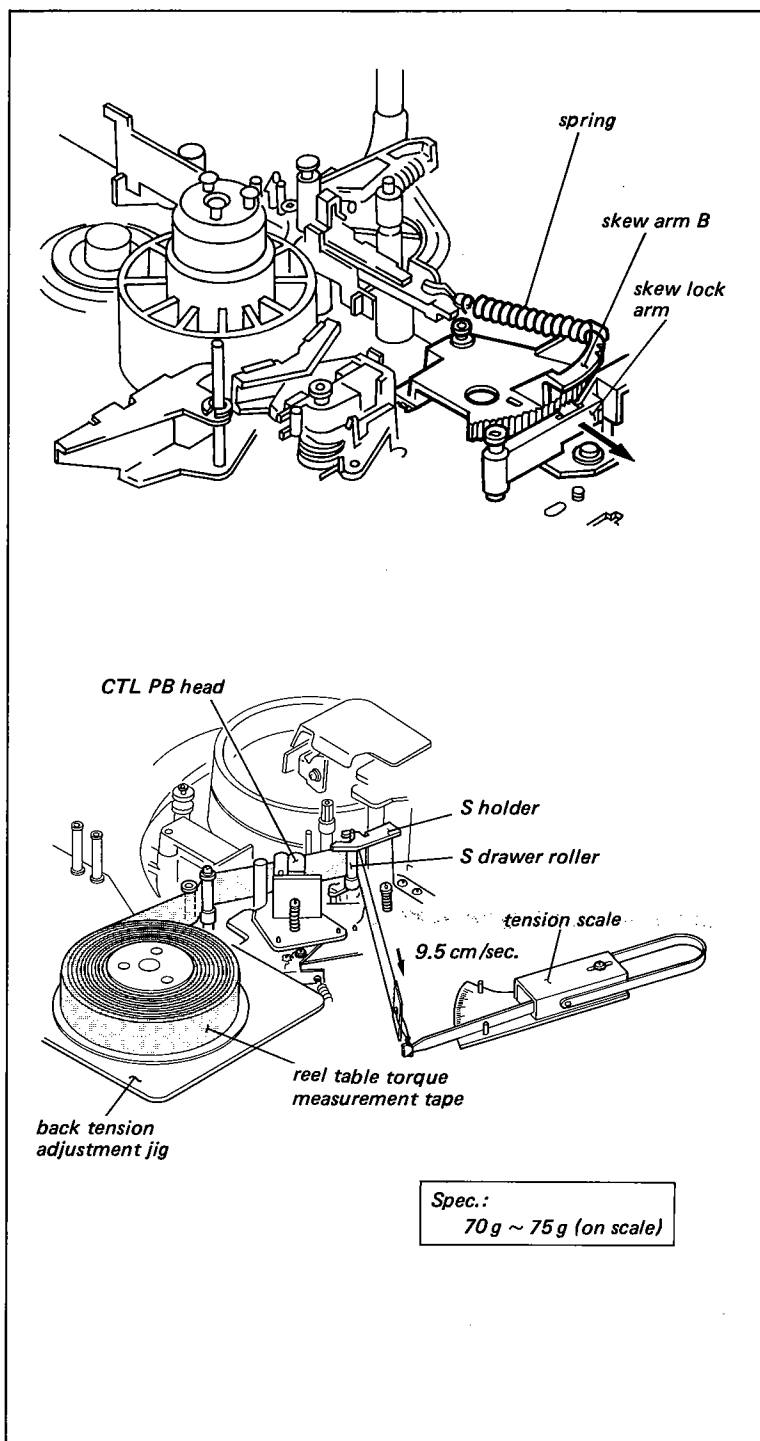



## SECTION 7

### TAPE RUN ALIGNMENT

#### 7-1. FF/REW MODES TAPE PATH ADJUSTMENT

**Mode:** FF and REW

**Check procedure:**

- (1) Install KCA-60 cassette tape (use the middle portion of the tape). Put the machine into REW mode.
- (2) Observe the surface of the running tape very carefully around T drawer arm. Check that the tape tension is exactly equal at the tape top and tape bottom. (Spec. 1)
- (3) Check that the tape runs without curl at the upper or lower flange of S drawer roller in the REW mode. (Spec. 2)
- (4) Put the machine once into the STOP mode, and put into the REW mode. Check that the tape runs without curl at the S drawer roller in the moment of just after the REW mode. (Spec. 3)
- (5) Put the machine into FF mode. Check that the tape runs without curl at the S drawer roller and T drawer arm in the moment of just after the FF mode. (Spec. 4)
- (6) Put the machine into FWD mode. Check that the top of the correct guide pin does not contact with the tape and drum. (Spec. 5)

**Adjustment procedure:**

**Spec. 1**

- (1) Adjust the slantness of T drawer arm by turning the T drawer arm adjusting screw.

**Spec. 2**


- (2) Bend the bottom of the correct guide with pliers in the arrow direction.

**Spec. 3**

- (3) Fine bend the bottom of the correct guide with pliers to satisfies the spec. 2) and 3).

**Spec. 4**

- (4) Fine adjust the slantness of the T drawer arm by turning the T drawer arm adjusting screw to satisfies the spec. 1) and 4).

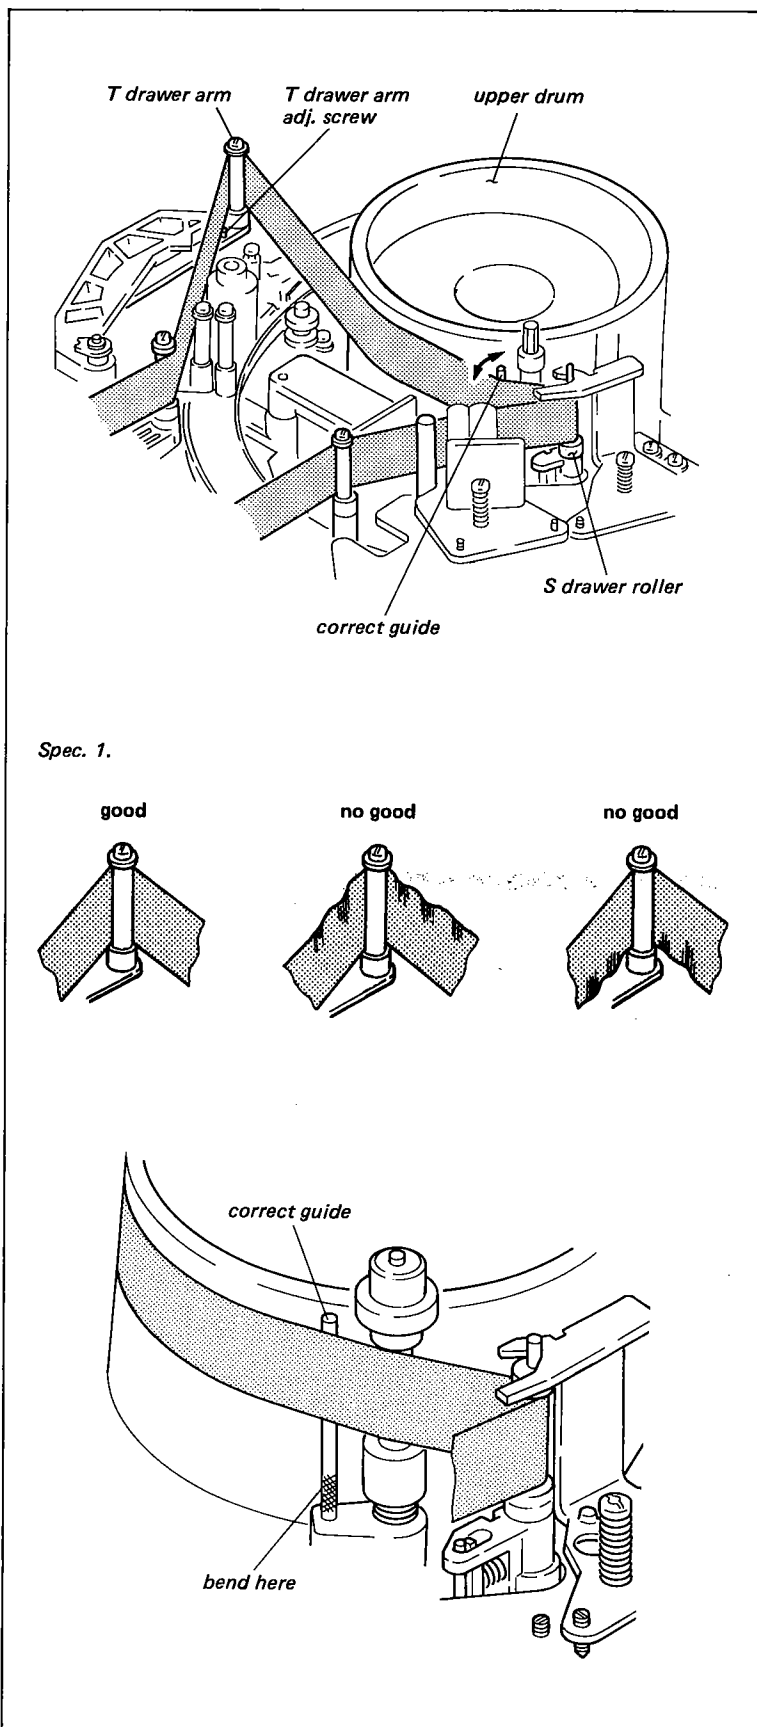


## 7.2. T CORRECTION GUIDE SLANTNESS ADJUSTMENT

### Check procedure:

- (1) Install KCA-60 cassette tape, and put the machine into the FR-STOP mode.
- (2) Press the PLAY button. The threading operation starts. Turn off the POWER when the pinch roller is pathed in front of the T correction guide.
- (3) Check that the clearance between the tape top edge and the upper bracket of T correction guide meets the required specification.

### Adjustment procedure:

- (1) Adjust the position of T correction guide with flat blade screwdriver 3 mm dia. meets the required specification.
- (2) After this adjustment, perform sec. 7-3 FWD mode tape path adjustment (1).

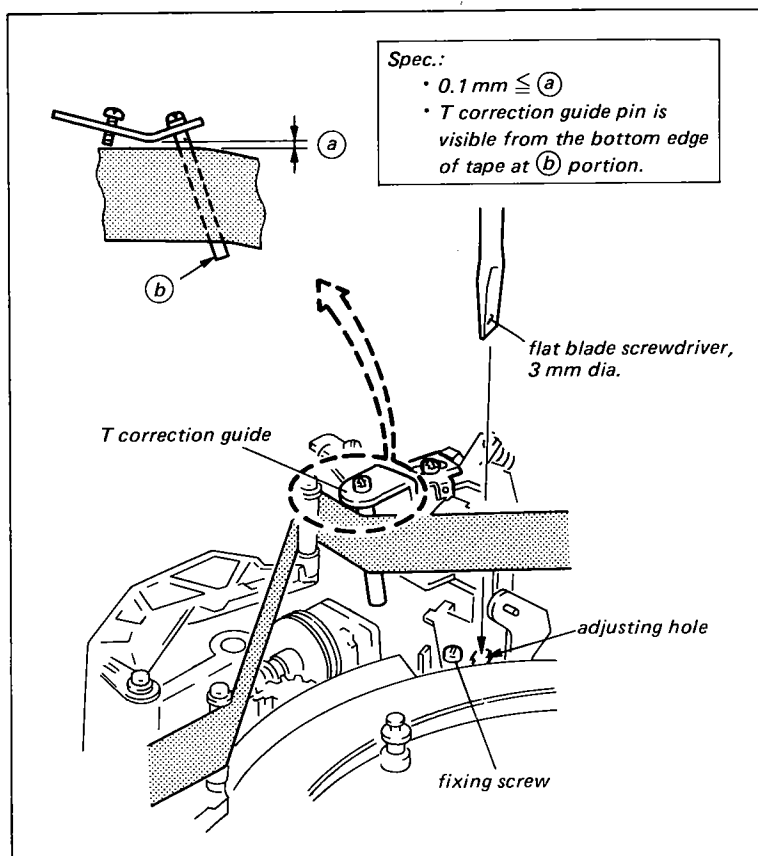

## 7.3. FWD MODE TAPE PATH ADJUSTMENT (1)

- It is required that the sec. 7-2 T correction guide slantness adj. and sec. 7-1 FF/REW modes tape path adj. are checked to be correct or properly adjusted before initiating this adjustment.

**Mode:** FWD

### Check procedure:

- (1) Install KCA-60 cassette tape (after the KCA-60 tape has run after 30 minutes). Put the machine into FWD mode.
- (2) Check that the tape runs without curl at the upper or lower flange of T drawer arm. (Spec. 1)
- (3) Check that the tape tension is exactly equal at the tape top and tape bottom, and the tape runs without curl at the lower flange of T drawer arm. (Spec. 2)


### Adjustment procedure:

#### Spec. 1

- (1) Adjust the height of T drawer arm by turning the T drawer arm height adjusting screw.

#### Spec. 2

- (2) Adjust the T correction guide in the arrow direction by adjusting screw.

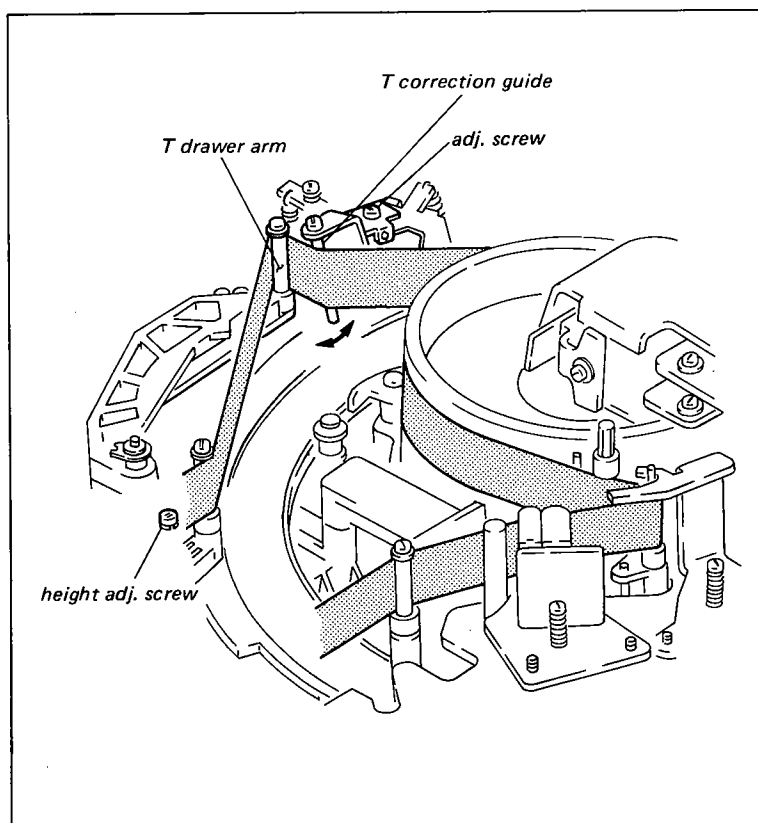

## 7-4. FWD MODE TAPE PATH ADJUSTMENT (2)


Mode: FWD

### Check procedure:

- (1) Install KCA-60 cassette tape (use the middle portion of the tape). Put the machine into FWD mode.
- (2) Check to see carefully two positions indicated by the \* mark in figure, check that the tape tension is exactly equal at the tape top and tape bottom. (Spec. 1)
- (3) Check that the clearance between the lower flange of threading roller and the tape bottom edge meets the required specification (2).

### Adjustment procedure:

- (1) Loosen the fixing screw in the bottom of the threading roller as shown in figure.
- Spec. 1
- (2) Adjust the slantness of the threading roller by turning the slantness adjusting screw.
- Spec. 2
- (3) Adjust the height of the threading roller by turning the threading roller shaft.
  - (4) Check again that the slantness and height meets the required specification 1) and 2).

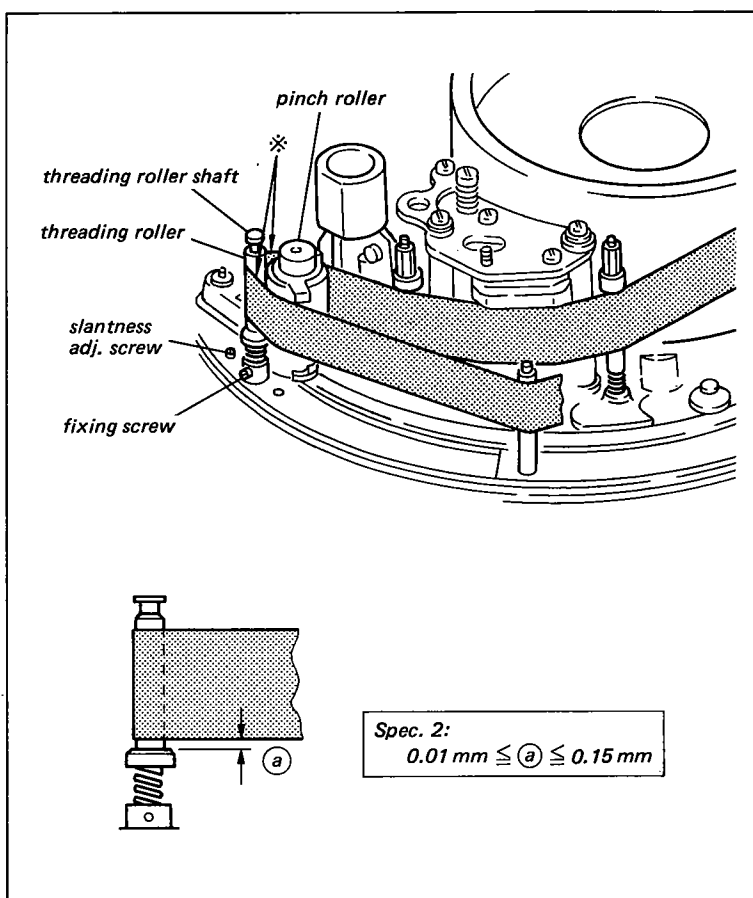


## 7-5. REV MODE TAPE PATH ADJUSTMENT

### Check procedure:

- (1) Install KCA-60 cassette tape (use the middle portion of the tape).
- (2) Put the machine into SEARCH REV mode. Check that the tape runs in contact with the lower flange of the threading roller without curl.
- (3) Put the machine into SEARCH FWD mode. Check that the clearance between the lower flange of the threading roller and the tape bottom edge meets the required specification and the tape does not curl at the lower or upper flange of TG-IV.

### Adjustment procedure:

- (1) Fine adjust the height of the threading roller by turning the threading roller shaft.
- (2) After this adjustment, perform sec. 7-4 FWD mode tape path adjustment (2).

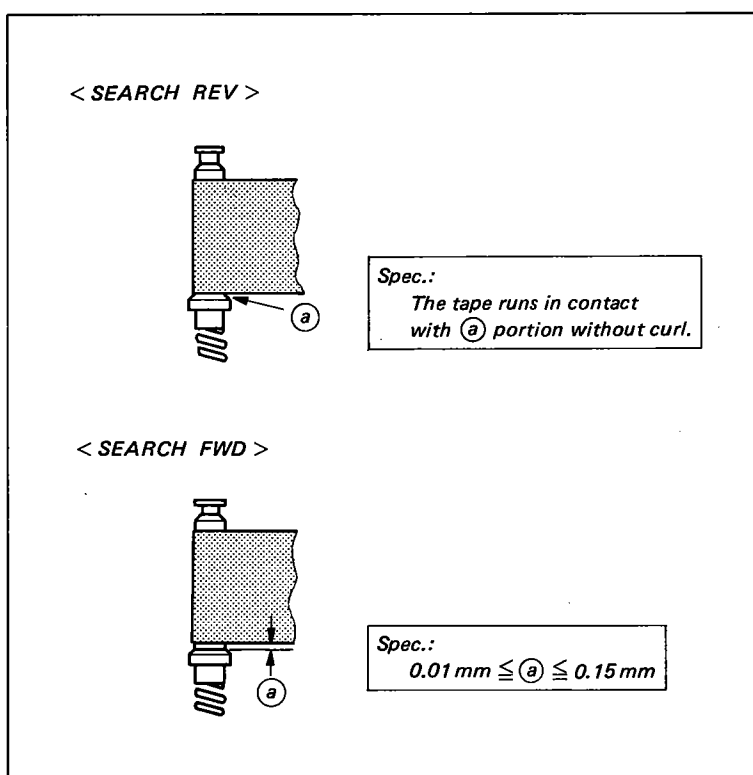

## 7-6. TAPE PATH ADJUSTMENT AROUND PINCH ROLLER

### 7-6-1. Tape Wrinkle Remove Adjustment


- The first priority of this adjustment is to remove the tape wrinkle around the pinch roller, happening in the moment of just after the pinch roller pressing against the capstan.
- If the tape wrinkle is generated, perform sec. 7-6-2 pinch roller slantness adjustment at first. After this adjustment performed, fine adjust this adjustment once again.

#### Check procedure:

- (1) Install KCA-60 cassette tape at the tape beginning portion.
- (2) Put the machine into FWD mode, SEARCH REV mode, repeat SEARCH REV and SEARCH FWD mode, PAUSE ON/OFF mode in the REC mode, and PAUSE ON/OFF mode in the playback mode. Check that the tape wrinkle does not appear or disappear within specified time when the tape runs toward the specified direction in these modes.

#### Adjustment procedure:

- (1) Perform sec. 7-6-2 pinch roller slantness adjustment.
- (2) Check the tape wrinkle refer to check procedure. If not, bend the pinch roller arm.

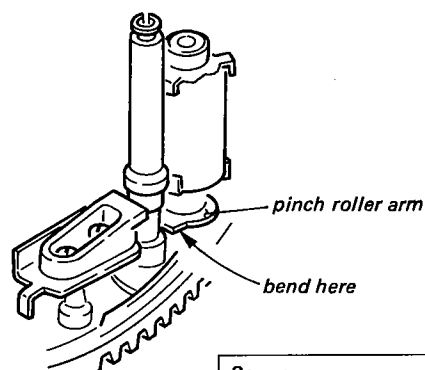

Spec.:  
Tape wrinkle disappears  
within 2 seconds.


### 7-6-2. Pinch Roller Slantness Adjustment

**Mode:** Threading completion mode without cassette tape.

#### Check procedure:

- (1) Remove the pinch roller pre-set bracket.
- (2) Put the machine into the threading completion mode without cassette tape. Turn POWER off.
- (3) Push lightly the \* marked portion of the pinch lever in the arrow direction with finger.
- (4) When the upper or lower section of the pinch roller came into contact with the capstan shaft. Check that the clearance between the lower or upper section of the pinch roller and the capstan shaft meets the required specification (1).
- (5) Push lightly the \* marked portion of the pinch lever in the arrow direction with finger.

Just before the pinch roller comes into contact with the capstan shaft, check that the upper section of the pinch roller does not move in the "A" direction nor "B" direction as observed by eye, visually. (Spec. 2)


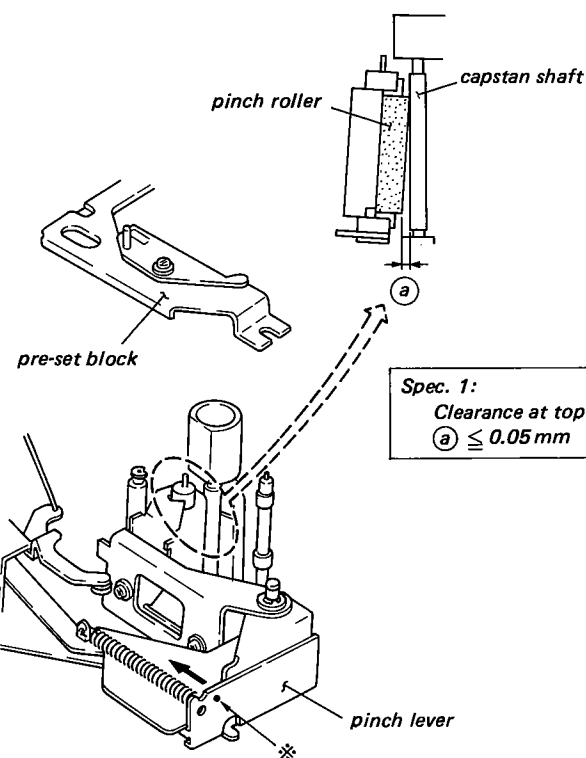


Spec. 1:  
Clearance at top or bottom.  
a ≤ 0.05 mm




**Adjustment procedure:**

- (1) Turn POWER on. The threading ring put into the unthreading operation. Turn POWER off in the moment when the pinch roller comes in front of the audio/CTL head.
- (2) Bend the pinch roller arm.
- (3) Check that the pinch roller slantness meets the required specification referring to check procedure. If not, repeat the foregoing step 2) until the specification 1) and 2) are met.
- (4) Install the pinch roller pre-set bracket, and perform sec. 5-4-2 pinch roller pre-set adj.

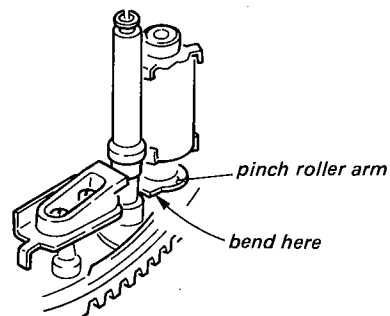

## 7-7. TRACKING ADJUSTMENT

The tracking adjustment is required to be performed as following steps.

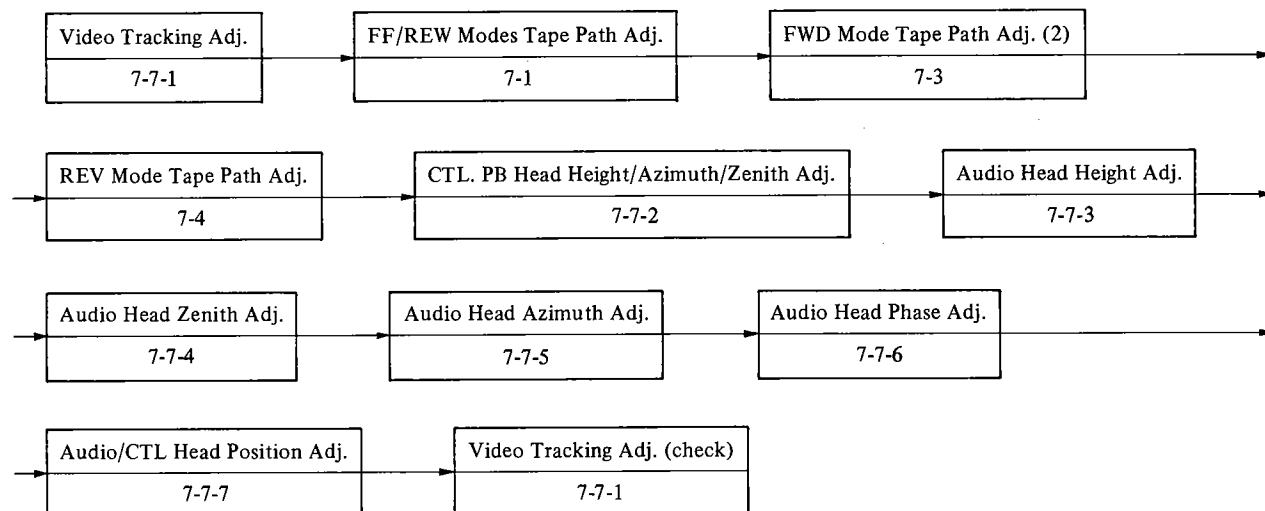

The tracking adjustment is required to be performed as following steps.

### 7-7-1. Video Tracking Adjustment

#### Tool and equipment:

Alignment tape, RR5-3SA  
Flatness plate  
Oscilloscope


- Preparation:**
- (1) Connect the oscilloscope to TP29/VO-9 board, and EXT.TRIG. from TP27/VO-9 board.
  - (2) Play back the color-bar segment of alignment tape.

#### Check procedure:

- (1) While observing the waveform on the scope, turn the TRACKING control in both directions noting that the RF waveform maintains a flat envelope while the amplitude increases and decreases.
- (2) Adjust the TRACKING control so that the RF envelope is just before starting to decrease. Check that the RF envelope fluctuation and head-to-tape contact are within the specification.

#### Adjustment procedure:

- When the video tracking adjustment is performed, the drum entrance side tape guide's height adjustment is usually not required. But when this guide (TG-II) is replaced or removed, adjust the height of this guide so that the tape runs at the center of this guide without tape runs in contact with upper or lower flange.

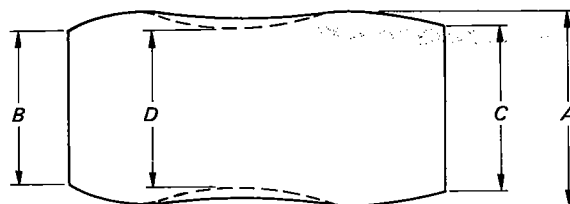


Spec.:

< head to tape contact >

$$\frac{B}{A} \geq 0.70 \quad \frac{C}{A} \geq 0.70$$

< fluctuation >

$$\frac{D}{A} \geq 0.90$$

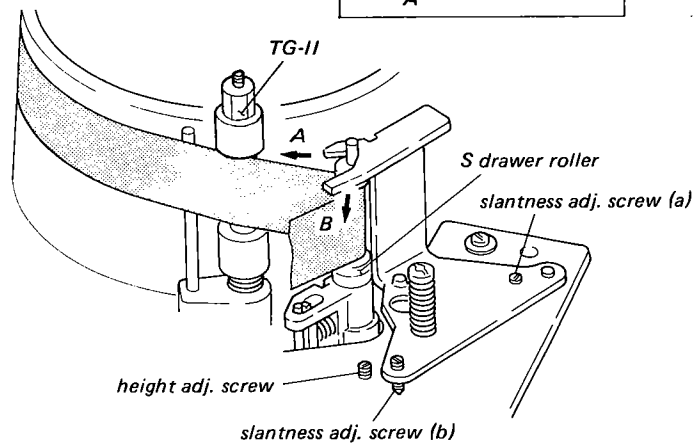

- S drawer roller unit has three adjusting screws. These three adjusting screws functions as follows.

(i) Slantness adjusting screw (a)  
Turning this screw in the clockwise direction, the upper section of S drawer roller slants in the arrow "A" direction.

(ii) Slantness adjusting screw (b)  
Turning this screw in the counter clockwise direction, the upper section of S drawer roller slants in the arrow "B" direction.

The RF envelope meets the required specification but tape runs curl at upper flange of S drawer roller, this screw is only used in this manner to remove tape curl.

(iii) Height adjusting screw  
Turning this screw in the clockwise direction, makes the height of S drawer roller lower.

- When the drum exit side tape guides (TG-III, TG-IV) adjustment are performed, loosen the locking screw 1 ~ 2 turns and adjust the height by turning the height adjusting nut.



- When the tracking at the drum's input side is no good.

- (1) Set the TRACKING control so that the RF envelope amplitude is made to 70 ~ 80% of the maximum amplitude.
- (2) Adjust height and slantness of S drawer roller by turning the height adjusting screw and slantness adjusting screw (a) so that the RF envelope is flat.


**(CAUTION)**

- (i) Observe the surface of the running tape very carefully around S drawer roller. Check that the tape tension is exactly equal at the tape top and tape bottom.
  - (ii) Check that the tape runs in contact with the upper flange of S drawer roller without tape curl.
- When the tracking at the drum's center portion is no good. It is required that the drum's input side tracking adjustment to be correctly adjusted before initiating this adjustment.
- (3) Set the TRACKING control so that the RF envelope amplitude is made to 70 ~ 80% of the maximum amplitude.
  - (4) Adjust height and slantness of S drawer roller by turning the height adjusting screw and slantness adjusting screw (a) so that the RF envelope is flat.

(TG-III)  
(TG-IV)

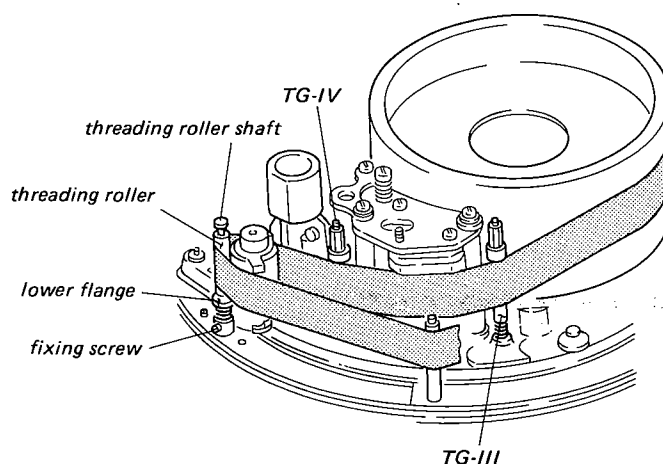
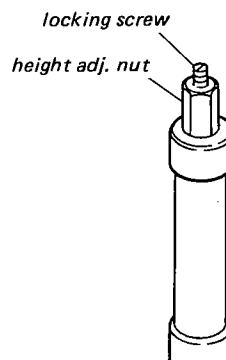


< drum entrance side >

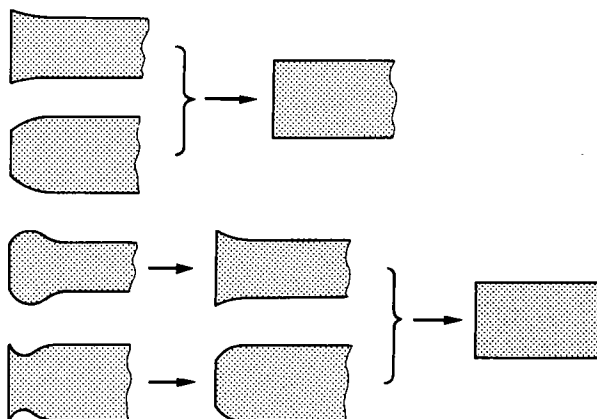


**(CAUTION)**

- (i) Adjust the slantness adjusting screw (a) in the clockwise within 10 degrees.
- (ii) When the drum's center portion tracking adjustment performs, the drum's input side tracking must maintain to flat.
- (iii) Check that the tape runs in contact with the upper flange of S drawer roller without tape curl.
- (5) When the RF envelope is not flat with step 4), adjust height of TG-III and TG-IV.
- (6) When the RF envelope is not flat with steps 4) and 5), adjust zenith of the audio/CTL head within the allowable range. Adjust height of TG-III and TG-IV once again.
- (7) Check that the clearance between the tape bottom edge and the lower flange of threading roller is 0.01 mm ~ 0.15 mm clearance. If not, perform height adjustment of threading roller by turning the threading roller shaft.


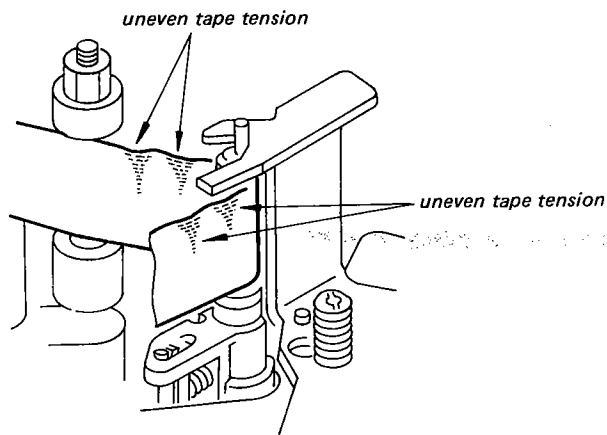
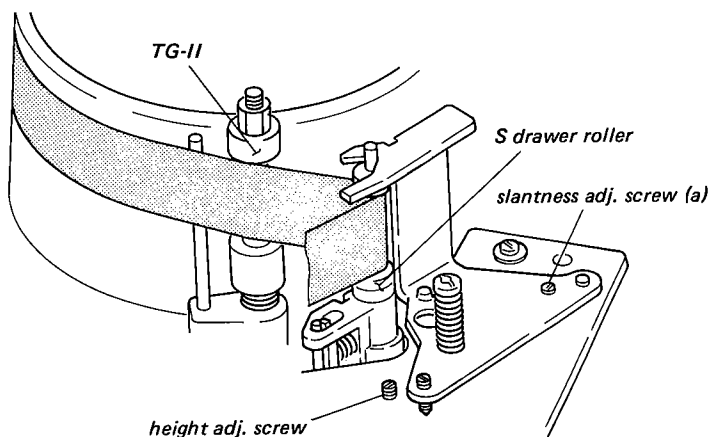


< zenith adj. for audio/CTL head >

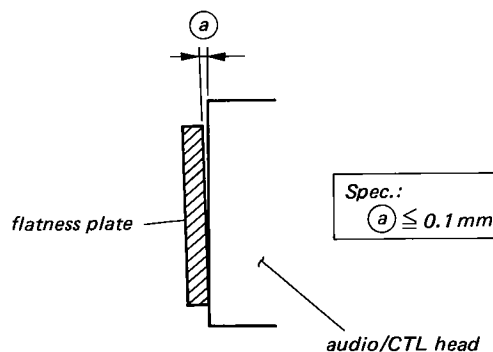

- When the tracking at the drum's exit side is no good.
- (8) Set the TRACKING control so that the RF envelope amplitude is made to 70 ~ 80% of the maximum amplitude.
  - (9) When the RF envelope is not flat as shown in figure 1, adjust height of TG-IV so that the RF envelope is flat. After this adjustment, adjust height of TG-III so that the tape runs in contact with upper flange. When the RF envelope is not flat as shown in figure 2, adjust height of TG-III and TG-IV so that the RF envelope is flat. If it does not with this adjustment, adjust the zenith of the audio/CTL head within the allowable range. Adjust the height of TG-III and TG-IV.
  - (10) Check that the clearance between the tape bottom edge and the lower flange of threading roller is 0.01 mm ~ 0.15 mm clearance. If not, perform height adjustment of threading roller by turning the threading roller shaft.

< drum exit side >

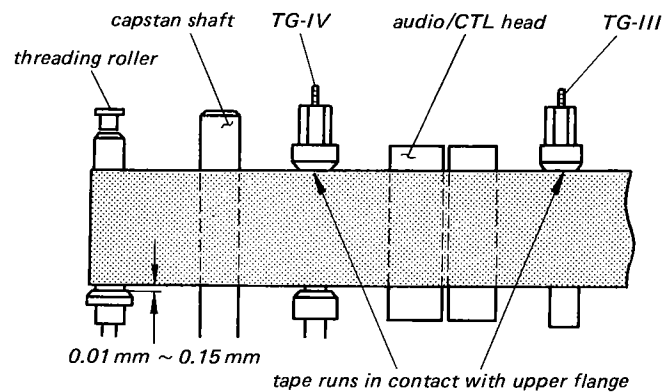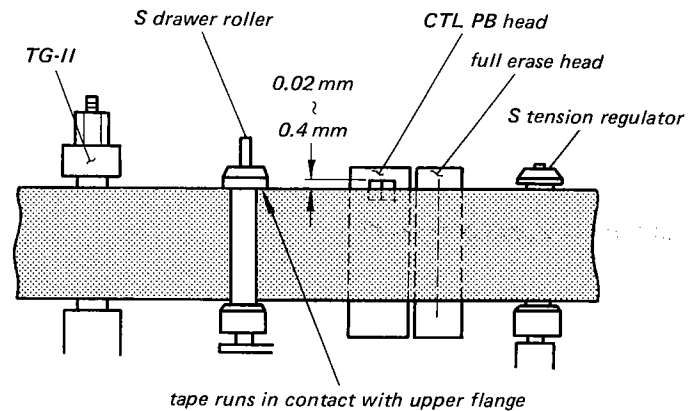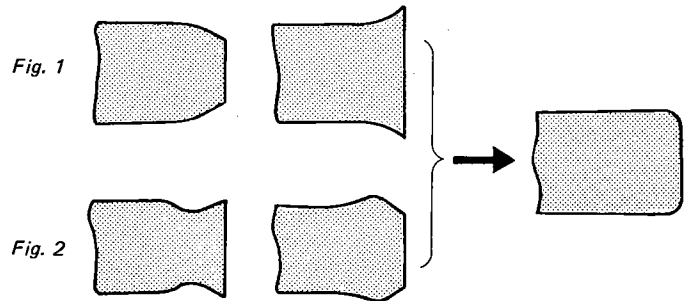

TAPE RUN

## 7-7-2. CTL PB Head Height/Azimuth/Zenith Adjustments

- CTL PB head height, azimuth, and zenith adjustments are closely related. If any one of these three adjustments is attempted, perform the rest of two adjustments at the same time.

### Tool and equipment:



Flatness plate

### Check procedure:


- Check that at the top and bottom clearances between erase head and TG-I meets the required specification. (Spec. 2: Azimuth check)
- Check that the clearance between the erase head and flatness plate meets the required specification, when the flatness plate set on the erase head and TG-I. (Spec. 3: Zenith check)
- Install a cassette tape, and put the machine into FWD mode.
- Check that the relationship between the top edge of tape and CTL PB head meets the required specification. (Spec. 1: Height check)

### Adjustment procedure:



- Adjust the adjusting screw (a) meets the required specification (2).
- Adjust the adjusting screw (b) meets the required specification (3).
- Turn three adjusting screws of exactly equal amount in clockwise or counterclockwise direction so that the relationship between tape and head meets the required specification (1).

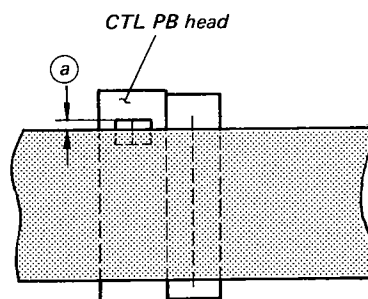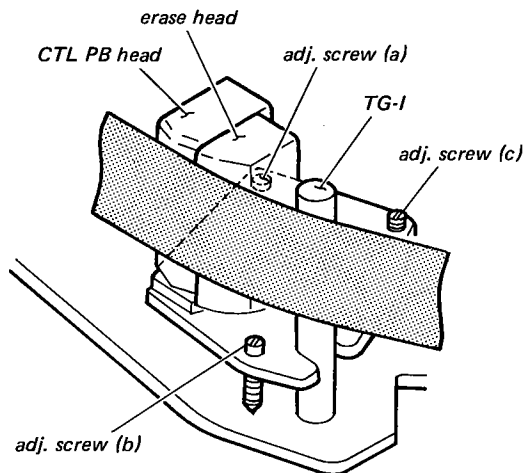


Spec.:  
(height)  
 $0.02 \text{ mm} \leq (a) \leq 0.4 \text{ mm}$

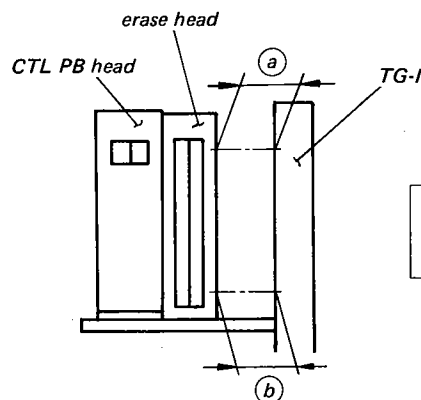

Spec.:  
(azimuth)  
 $(a) \div (b)$

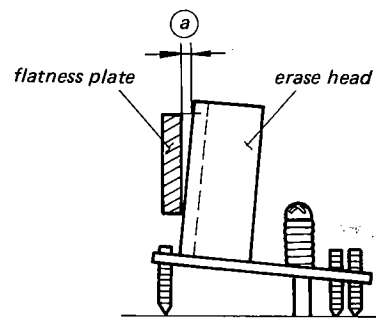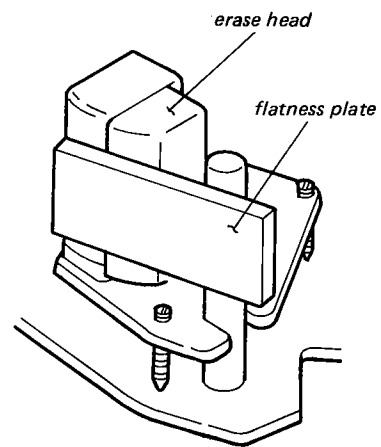

Spec.:  
(Zenith)  
 $a \leq 0.1 \text{ mm}$

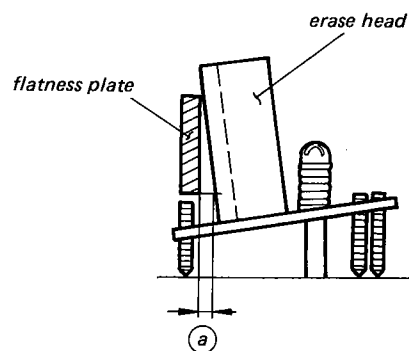

TAPE RUN

### 7-7-3. Audio Head Height Adjustment

#### Tool and equipment:

Alignment tape, RR5-3SA  
VTVM or oscilloscope


- Preparation:**
- (1) Connect the VTVM or oscilloscope to AUDIO OUT CH-1 and CH-2 terminals.
  - (2) Playback the audio 1 kHz segment of the alignment tape.

#### Check procedure:

- (1) Check that the CH-1 output level increase is less than 0.5 dB when pressing down at (A).  
If not, perform the steps (1) and (2) of the adjustment procedure.
- (2) Check that the CH-2 output level increase is less than 0.5 dB when pushing up at (B).  
If not, perform the steps (3) and (4) of the adjustment procedure.

#### Adjustment procedure:

- (1) Loosen the locking screw and turn adjusting screws (R) and (A) of exactly equal amount in counter-clockwise direction and turn adjusting screw (C) of exactly equal amount in clockwise direction.
- (2) Tighten the locking screw and check height again.
- (3) Loosen the locking screw and turn adjusting screws (R) and (A) of exactly equal amount in clockwise direction and turn the screw (C) of exactly equal amount in counter-clockwise direction.
- (4) Tighten the locking screw and check height again.

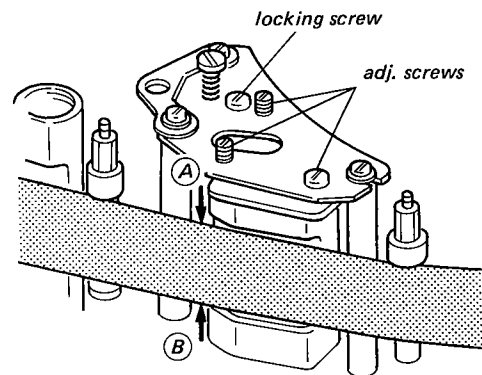

#### Spec.:

- CH-1 level increase is less than 0.5 dB when pressing down at (A) portion.
- CH-2 level increase is less than 0.5 dB when pushing up (B) portion.

### 7-7-4. Audio Head Zenith Adjustment

#### Tool and equipment:

Flatness plate


#### Check procedure:

Check that the clearance between the audio head and the flatness plate meets the required specification, when the flatness plate is set on the audio head and TG-III.

#### Adjustment procedure:

When the clearance is out of spec. at the top portion of the audio head.


- (1) Turn the adjusting screw (R) in counterclockwise direction.
- (2) Tighten the locking screw and check zenith again.

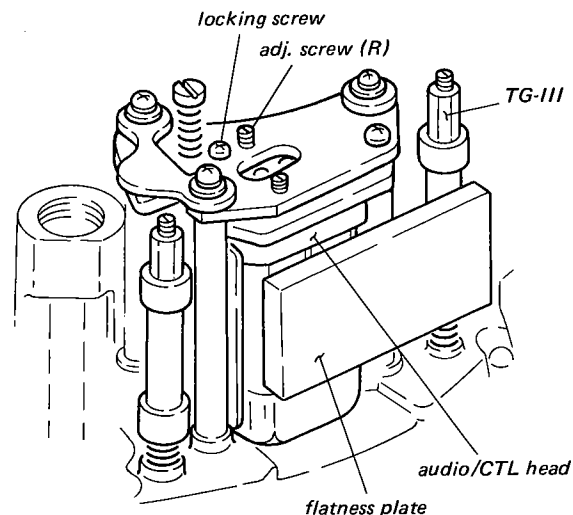



When the clearance is out of spec. at the bottom portion of the audio head.

- (3) Loosen the locking screw  $\frac{1}{4} \sim \frac{1}{2}$  turns.
- (4) Turn the adjusting screw (R) in clockwise direction.
- (5) Tighten the locking screw and check zenith again.

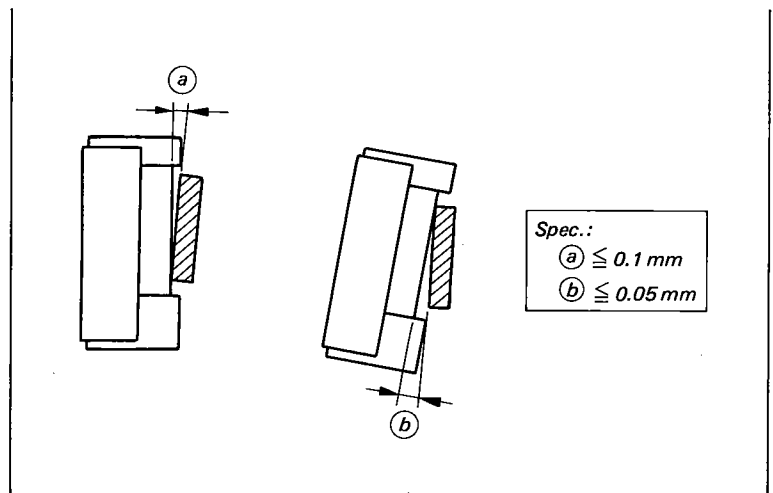

### 7-7-5. Audio Head Azimuth Adjustment


#### Tool and equipment:

Alignment tape, RR5-3SA  
 VTVM or oscilloscope

- Preparation:**
- (1) Connect the VTVM or oscilloscope to AUDIO OUT CH-1 or CH-2 terminal.
  - (2) Playback the audio 10 kHz portion of the alignment tape.

#### Adjustment procedure:

- (1) Loosen the locking screw and adjust the maximum output level by turning the adjusting screw.
- (2) Tighten the locking screw.

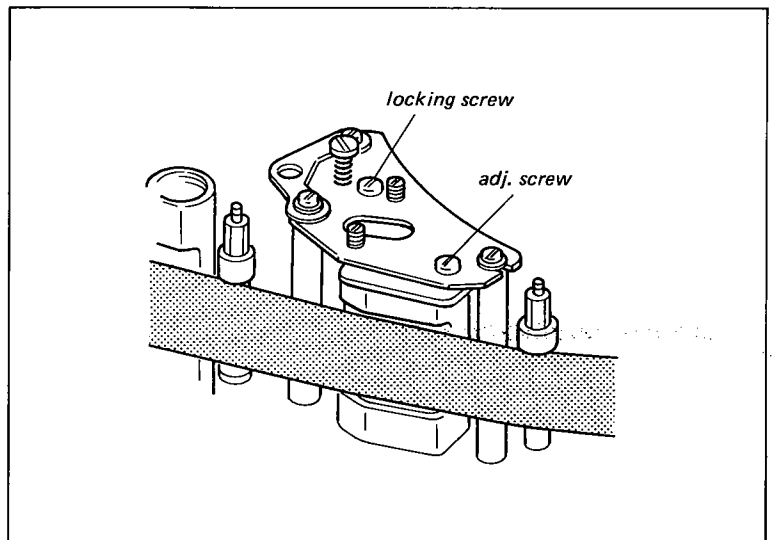

### 7-7-6. Audio Head Phase Adjustment

#### Tool and equipment:

Alignment tape, RR5-3SA  
Oscilloscope


- Preparation:**
- (1) Connect the horizontal and vertical terminals of the oscilloscope to AUDIO OUT CH-1 and CH-2 terminals.
  - (2) Playback the audio 1 kHz portion of the alignment tape.
  - (3) Adjust the scope for horizontal and vertical amplitudes of 6 cm of a lissajous waveshape.

#### Check procedure:

Check that the vertical amplitude at the center in the horizontal direction is within the specification at 1 kHz and 10 kHz.

#### Adjustment procedure:

- (1) Loosen the locking screw  $\frac{1}{4}$  ~  $\frac{1}{2}$  turns and adjust the phase by turning the adjusting screw.
- (2) Tighten the locking screw and confirm phase again.

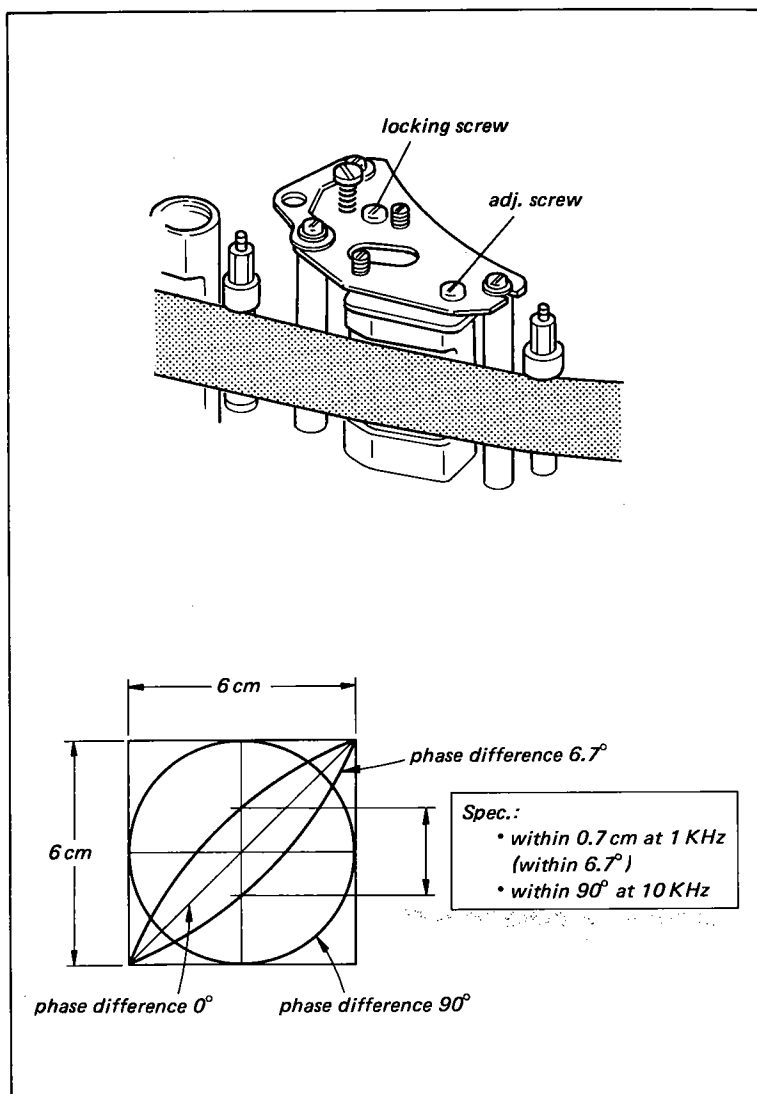

### 7-7-7. Audio/CTL Head Position Adjustment

#### Tool and equipment:

Alignment tape, RR5-3SA  
Oscilloscope


- Preparation:**
- (1) Connect the oscilloscope to TP29/VO-9 board, EXT.TRIG. from TP27/VO-9 board.
  - (2) Playback the color-bar segment of the alignment tape.

#### Check procedure:

- (1) Check that the RF envelope has the maximum amplitude when the TRACKING control is set in the detent position.

#### Adjustment procedure:

- (1) Adjust the position of the audio/CTL head.

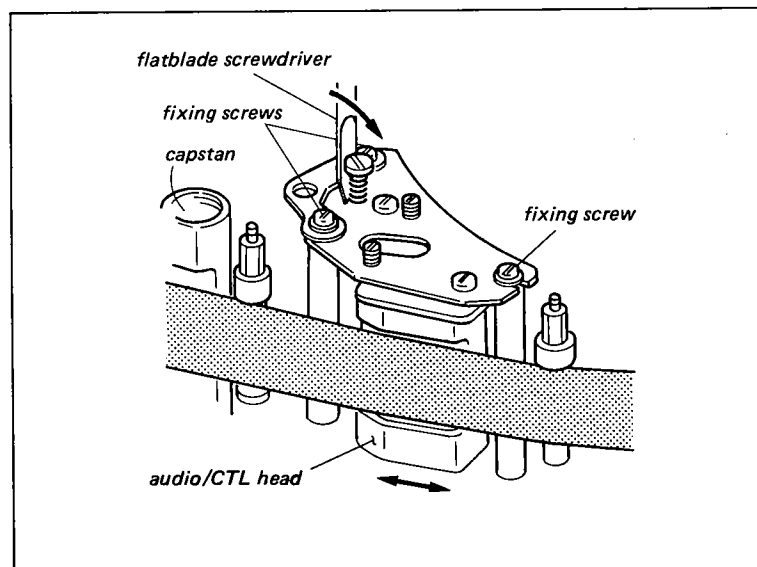

## 7-8. VIDEO HEAD DIHEDRAL ADJUSTMENT

### Tool and equipment:


Dihedral adjusting screw  
Alignment tape, RR5-3SA  
Video monitor

### Check procedure:

Check that the vertical line beneath the switching point. If the vertical line does not split into two lines, no adjustment is necessary.

### Adjustment procedure:

- (1) Screw lightly four dihedral adjusting screws into the upper drum.
- (2) Turn either of the two screws adjacent to the video head with white leads until some resistance is felt.
- (3) If this screw is turned further, the video head is moved and the dihedral is adjusted.  
Therefore, turn this screw an additional quarter turn.
- (4) Check for dihedral distortion. If the distortion has gotten worse, turn this screw back one turn and tighten the other screw a quarter turn. Check again for dihedral distortion and continue in this way until dihedral error is eliminated.
- (5) When the adjustment is completed, remove the four dihedral adjusting screws. After removal, playback the alignment tape and check dihedral again as error sometimes reappears after screws are removed.

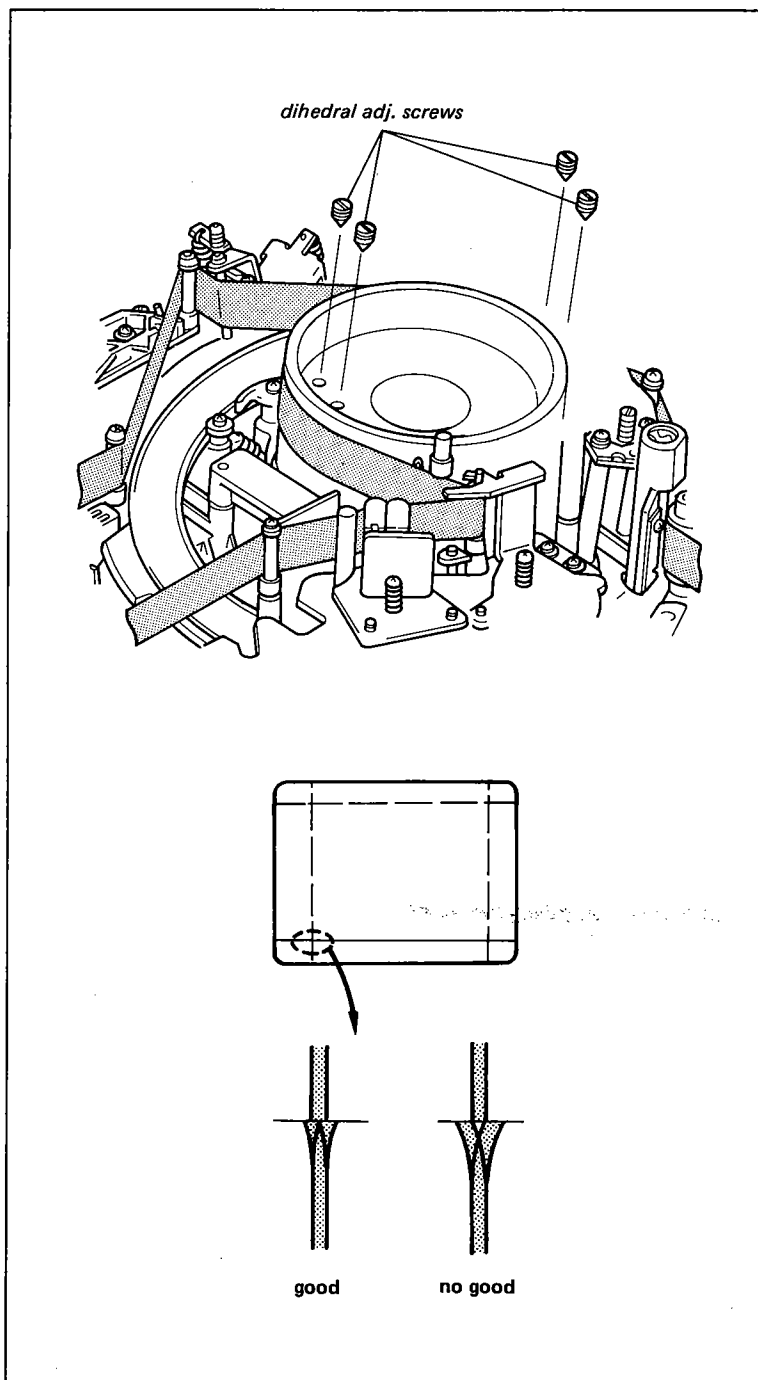

TAPE RUN



## SECTION 8

### POWER SUPPLY AND SYSTEM CONTROL ALIGNMENT

#### 8-1. REG +12V ADJUSTMENT(SWITCHING REGULATOR)

.More than 5 minutes should be elapsed after POWER ON.  
.Any mode.

Check point; CN201-1/UR-01

Spec:  $12.0V \pm 0.1V_{dc}$

Adj: RV301/PW-68(UR-01)

**NOTE:** If the REG 12V adjustment is attempted, re-alignment of the video system and servo system are required.

Do not attempt adjustment to REG 12V power supply unless machine performance is obviously poor due to incorrect power supply voltage.

If adjustments are made to the power supply, re-alignment of the video and servo systems are necessary.

#### 8-2. REG +9V ADJUSTMENT

.POWER ON.  
.STOP mode.

Check point: TP1/DC-13

Spec:  $9.0V \pm 0.1V_{dc}$

Adj: RV1/DC-13

#### 8-3. DIGITAL VCC +5V ADJUSTMENT FOR SERVO

.FWD mode.

Check point: TP32/SV-44

Spec:  $5.0V \pm 0.1V_{dc}$

Adj: RV16/SV-44

#### 8-4. TAPE SENSOR BALANCE ADJUSTMENT

.STOP mode.

Check point: TP4/SY-75

Spec:  $6.0V \pm 0.2V_{dc}$

Adj: RV2/SY-75

## SECTION 9

### SERVO SYSTEM ALIGNMENT


**[Equipment Required]**

- Alignment Tape; RR5-1S (Part No. 8-960-015-01) or  
RR5-2SA (Part No. 8-960-015-03) or RR5-3SA (Part No. 8-960-015-04)

**RR5-2SA/RR5-3SA**

Real Time Counter (min.)	Tape Counter	Video Track	Audio Track
00:00 – 04:00	000 – 100	Monoscope	3 KHz, 0 dB
04:00 – 09:00	100 – 208	Color-bar	_____
09:00 – 14:00	208 – 300	R-F sweep	_____
14:00 – 16:00	300 – 335	Mod. 20T pulse	1 KHz, 0 dB
16:00 – 18:00	335 – 367	M.S. w/burst	10 KHz, –10 dB
18:00 – 20:00	367 – 398	Pseudo C.B. for DOC adj.	_____

- Blank Tape; KCA-60, KCS-20
- Dual Trace Oscilloscope
- Frequency Counter

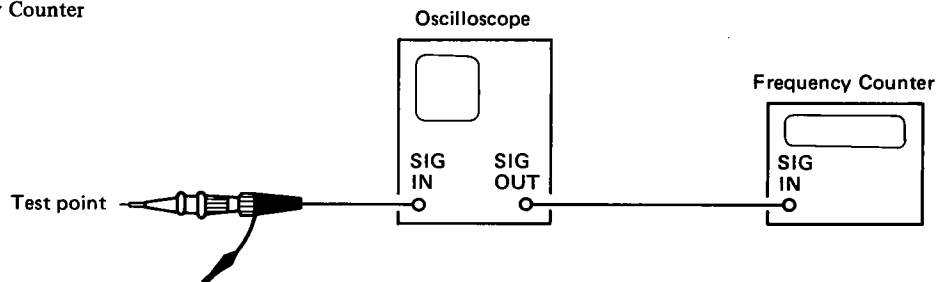

## 9-1. AUDIO/CTL HEAD POSITION ADJUSTMENT

.Refer to Sec. 7-7-7.

## 9-2. TRACKING MULTI ADJUSTMENT

.Playing back the color bar segment of Alignment Tape.  
.Set the TRACKING control to its center detent.

Check point; TP21 and TP22/SV-44


Trig; TP22/SV-44

Spec;


TP21/SV-44

CHOP  
mode

TP22/SV-44



T = 0

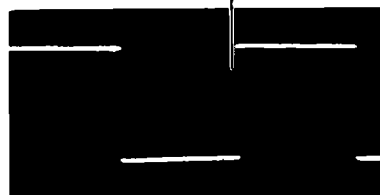

Adj; RV10/SV-44

SERVO



### 9-3. CAPSTAN FREE SPEED ADJUSTMENT


.Playing back the Alignment Tape.

.Short between TP28 and E3 on SV-44 board with jumper lead.

Check point; TP3/SV-44

Trig; TP3/SV-44

Spec;

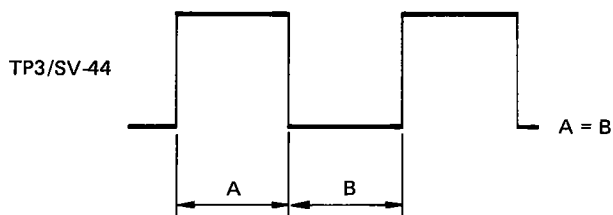

Adj; RV6/SV-44


### 9-4. CAPSTAN STOP SERVO ADJUSTMENT

.STOP mode.

Check point; TP16/SV-44(STOP SERVO-1)TP18/SV-44(STOP SERVO-2)

Trig; TP22/SV-44

Spec;

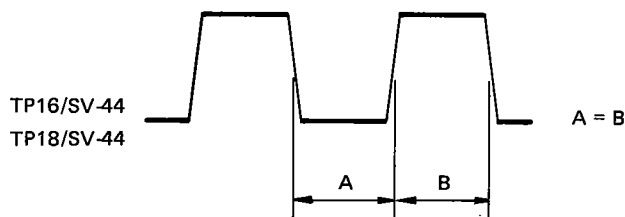

Adj; RV13/SV-44(STOP SERVO-1)  
RV12/SV-44(STOP SERVO-2)

### 9-5. CAPSTAN SEARCH x5 SPEED ADJUSTMENT

.Playing back the blank tape.

.FWD PAUSE mode

.Short between TP30 and E3 on SV-44 board with jumper lead.

Check point; TP19/SV-44

Spec; 36Hz<sup>+8Hz</sup>  
-6Hz

Adj; RV11/SV-44


## 9-6. CAPSTAN FWD/REV DETECTOR ADJUSTMENT

- .Playing back the Alignment Tape.
- .Set the TRACKING control to its center detent.

Check point; TP19/SV-44

Trig; TP22/SV-44

Spec;

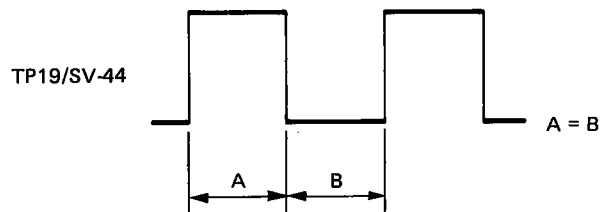

Adj; RV14/SV44


## 9-7. DRUM AFC BIAS ADJUSTMENT

- .Plaing back the Alignment Tape.
- .FWD and FWD PAUSE mode.
- .Set the TRACKING control to its center detent.

Check point; TP7/SV-44

Trig; TP7/SV-44

Spec;

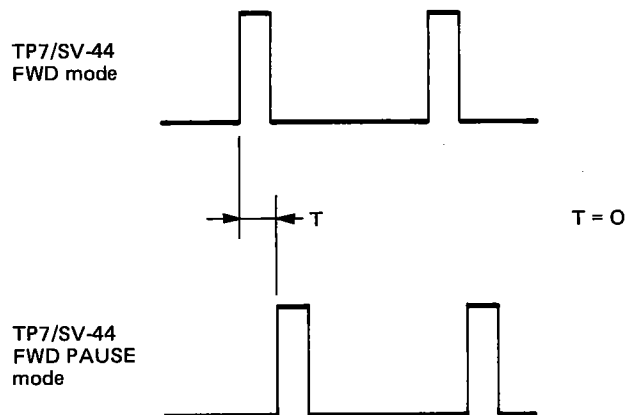

Adj; RV9/SV44

### 9-8. DRUM AFC TRANSIENT ADJUSTMENT

- .Plaing back the Alignment Tape
- .FWD and FWD PAUSE mode.
- .Set the TRACKING control to its center detent.

Check point; TP11/SV-44

Spec; FWD PAUSE mode=1.7Vdc(REF)  
FWD mode=1.7V $\pm$ 0.1Vdc

Adj; RV7/SV-44


### 9-9. DRUM LOCK PHASE ADJUSTMENT

- .VIDEO LINE IN;NTSC Color Video signal.
- .Short between TP14 and E3 on SV-44 board with jumper lead.
- .REC mode.

Check point; TP20 and TP4/SV-44

Trig; TP22/SV-44

Spec;

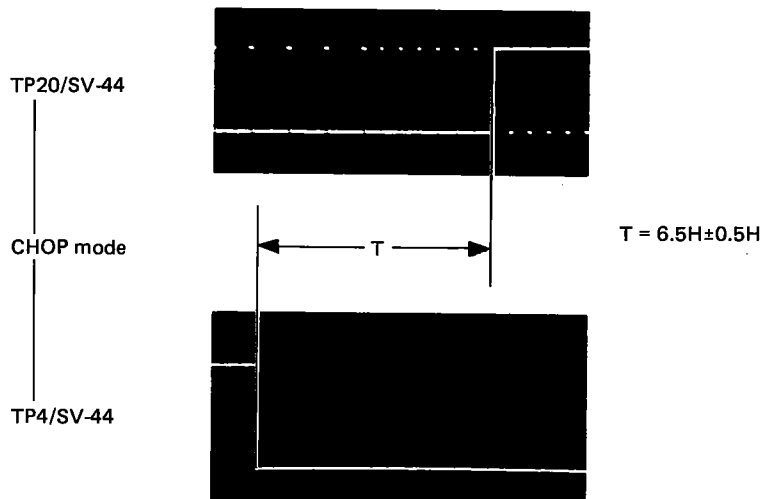

Adj; RV3/SV-44

SERVO



## 9-10. SWITCHING POSITION ADJUSTMENT

- .Playing back the color bar segment of the Alignment Tape.
- .Short between TP7, TP14 and E3 on SV-44 board with jumper leads.
- .Set the TRACKING control to its center detent.

Check point; TP4/SV-44 and TP16/VO-9

Trig; TP22/SV-44

Spec;

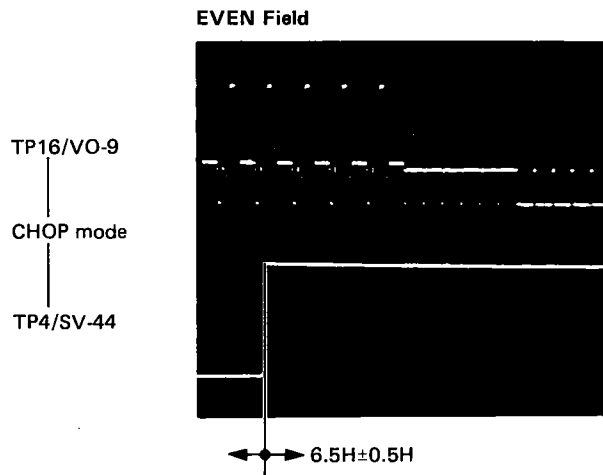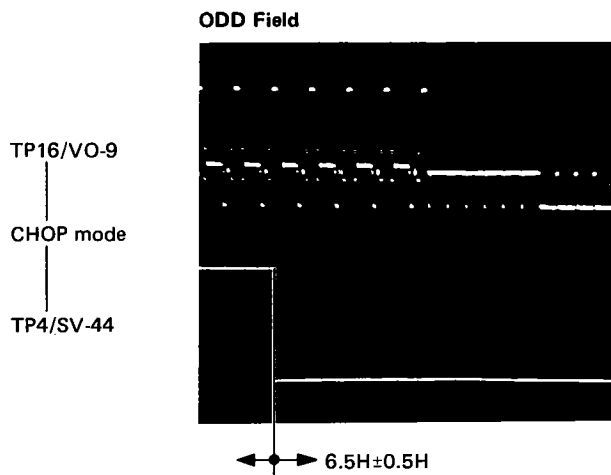

Adj; RV1/SV-44(ODD Field)  
RV8/SV-44(EVEN Field)

## 9-11. REEL SERVO ADJUSTMENT

### 9-11-1. Still Speed Adjustment

.FWD PAUSE mode

Check point; CN6-1 and CN6-3/MR-8 or MR-11A

Spec;  $0.4V \pm 0.02V_{dc}$

Adj; RV3/MR-8 or RV4/MR-11A

NOTE; FWD torque Alignment(RV1/MR-8 or MR-11A) and REV torque Alignment(RV2/MR-8 or MR-11A) Refer to Mechanical Alignment sec.6-3 and 6-4.

## SECTION 10

### AUDIO SYSTEM ALIGNMENT


**[Equipment Required]**

- Alignment Tape; RR5-1S (Part No. 8-960-015-01) or  
RR5-2SA (Part No. 8-960-015-03) or RR5-3SA (Part No. 8-960-015-04)

**RR5-2SA/RR5-3SA**

Real Time Counter (min.)	Tape Counter	Video Track	Audio Track
00:00 – 04:00	000 – 100	Monoscope	3 KHz, 0 dB
04:00 – 09:00	100 – 208	Color-bar	_____
09:00 – 14:00	208 – 300	R-F sweep	_____
14:00 – 16:00	300 – 335	Mod. 20T pulse	1 KHz, 0 dB
16:00 – 18:00	335 – 367	M.S. w/burst	10 KHz, –10 dB
18:00 – 20:00	367 – 398	Pseudo C.B. for DOC adj.	_____

- Blank Tape; KCA-60, KCS-20
- Oscilloscope
- Frequency Counter

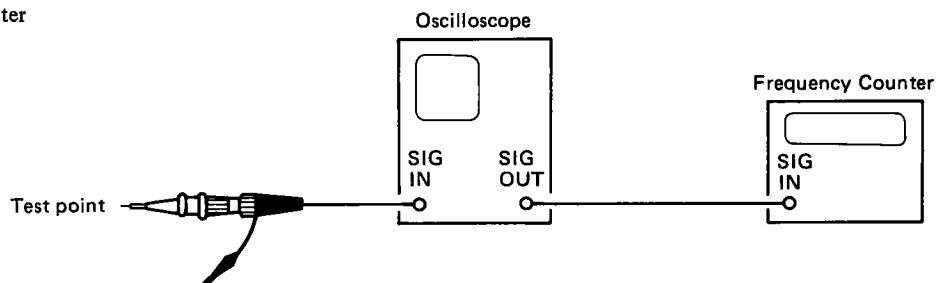

### 10-1. PB OUTPUT FREQUENCY RESPONSE ADJUSTMENT

.Playing back the 1kHz and 10kHz segments of Alignment Tape.

Check Point; AUDIO LINE OUT(Terminated by 47kohm)

Spec; (1kHz Level=REF Level)  
10kHz Level=(REF Level)-10dB $\pm$ 0.5dB

Adj; RV1/AU-28(CH-1)  
RV201/AU-28(CH-2)

### 10-2. AUDIO LEVEL CONTROL SETTING/METER CALIBRATION ADJUSTMENT

.MIC IN; 1kHz, -60dB


.LIMITER sw; OFF

.EE mode

.AUDIO LINE OUT (Terminated by 47kohms)-5dB $\pm$ 0.5dB(CH-1=CH-2)  
(By AUDIO LEVEL VR)

Check Point; AUDIO METER(CH-1=CH-2)

Spec; 0dB $\pm$ 0.5dB

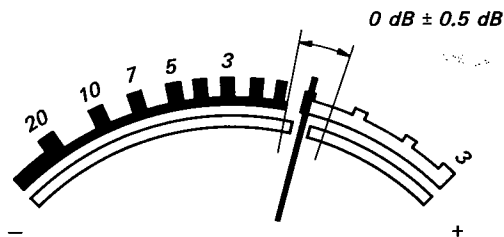

Adj; RV4/AU-28(CH-1)  
RV204/AU-28(CH-2)

**NOTE;**The AUDIO LEVEL VR should not be touched until rest of Sec.10 Audio System Alignment are completed.

### 10-3. PB OUTPUT LEVEL ADJUSTMENT

.Playing back the 1kHz and 10kHz segments of Alignment Tape.

Check point; AUDIO LINE OUT (Terminated by 47kohm)

Spec;  $-5\text{dB} \pm 0.5\text{dB}$  (CH-1=CH-2)

Adj; RV2/AU-28(CH-1)  
RV202/AU-28(CH-2)

### 10-4. AUDIO BIAS/ERASE FREQUENCY ADJUSTMENT

.AUDIO IN;no signal input.  
.REC mode.

Check point; TP503/AU-28

Spec:  $71\text{kHz} \pm 0.1\text{kHz}$

Adj; LV501/AU-28

### 10-5. AUDIO BIAS CURRENT ADJUSTMENT

.MIC IN;1kHz/10kHz,-80dB.  
.REC/PB mode.

Check point; AUDIO LINE OUT (Terminated by 47kohm)

Spec;  
$$\left[ \begin{array}{c} 10\text{kHz} \\ \text{REC/PB Level} \end{array} \right] = \left[ \begin{array}{c} 1\text{kHz} \\ \text{REC/PB LEVEL} \end{array} \right] \pm 0.5\text{dB}$$

Increasing the BIAS voltage by 1V(rms)  
(measured at TP501/AU-28 for CH-1,TP502/AU-28 for CH-2)  
corresponds to the decrease of 0.4dB of the 10kHz REC/PB level

Adj; CV501-A/AU-28(CH-1)  
CV501-B/AU-28(CH-2)

AUDIO

#### 10-6. BIAS TRAP ADJUSTMENT (REC-1)

.AUDIO IN;no signal input.  
.REC mode.

Check point; TP4/AU-28(CH-1)  
TP204/AU-28(CH-2)

Spec; Adjust for minimum signal amplitude.

Adj; LV3/AU-28(CH-1)  
LV203/AU-28(CH-2)

#### 10-7. AUDIO LIMITER GAIN ADJUSTMENT

. MIC IN;1kHz,-30dB.  
. LIMITER sw;ON.  
. STOP mode.

Check point; AUDIO LINE OUT(Terminated by 47kohm)

Spec;  $-2\text{dB} \pm 0.5\text{dB}$  (CH-1=CH-2)

Adj; RV3/AU-28(CH-1)  
RV203/AU-28(CH-2)

#### 10-8. REC LEVEL ADJUSTMENT

.MIC IN;1kHz,-60dB.  
.LIMITER sw;OFF  
.REC and PB mode.

Check point; AUDIO LINE OUT(Terminated by 47kohm)

Spec; The self record/playback level should be  $-5\text{dB} \pm 0.5\text{dB}$  (The level difference between CH-1 and CH-2 should be less than 0.5dB)

If adjustment is found to be necessary, increase or decrease the EE signal level at TP5/AU-28(CH-1) or TP205/AU-28(CH-2) during EE mode, by the same signal level as is found to be adjusted in the self record/playback procedure.

Adj; RV5/AU-28(CH-1)  
RV205/AU-28(CH-2)

AUDIO



#### 10-9. INSERT BIAS FREQUENCY ADJUSTMENT

.AUDIO IN; no signal input.  
.AUDIO DUB mode(CH-1).

Check point; TP503/AU-28

Spec; 71kHz $\pm$ 0.1kHz

Adj; LV502/AU-28(CH-1)

#### 10-10. PB BIAS TRAP ADJUSTMENT

.Using a blank tape that has not been recoded audio signal.  
.AUDIO DUB mode(CH-1).

Check point; TP202/AU-28

Spec; Minimize the signal amplitude(bias leak)

Adj: LV202/AU-28

#### 10-11. CROSS-TALK CANCEL ADJUSTMENT

.MIC IN;5kHz,-60dB.  
.Using an audio blank tape.  
.AUDIO DUB mode(CH-1).

Check point; LINE OUT

Spec; Minimize the signal amplitude(cross-talk)

Adj; RV6/AU-28



# SECTION 11


## VIDEO SYSTEM ALIGNMENT

### [Equipment Required]

- Dual Trace Oscilloscope
- Frequency Counter
- Video Sweep Generator (with Burst)
- Blank Tape; KCA-60 (SONY standard product)
- Alignment Tape; RR5-1S (Part No. 8-960-015-01) or RR5-2SA (Part No. 8-960-015-03) or RR5-3SA (Part No. 8-960-015-04)


### RR5-2SA/RR5-3SA

Real Time Counter (min.)	Tape Counter	Video Track	Audio Track
00:00 – 04:00	000 – 100	Monoscope	3 KHz, 0 dB
04:00 – 09:00	100 – 208	Color-bar	_____
09:00 – 14:00	208 – 300	R-F sweep	_____
14:00 – 16:00	300 – 335	Mod. 20T pulse	1 KHz, 0 dB
16:00 – 18:00	335 – 367	M.S. w/burst	10 KHz, -10 dB
18:00 – 20:00	367 – 398	Pseudo C.B. for DOC adj.	_____

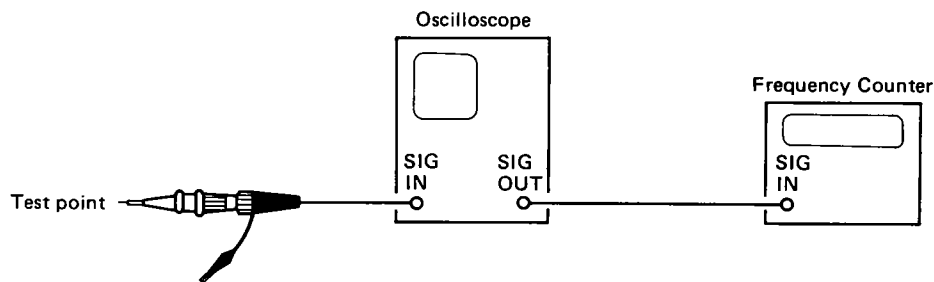


### [Video Signals Required]


- Color Bar Signal; 75% color bar signal
- Color Video Signal; Any video signal that has the NTSC specified subcarrier and sync signals.
- Sin<sup>2</sup> wave signal;

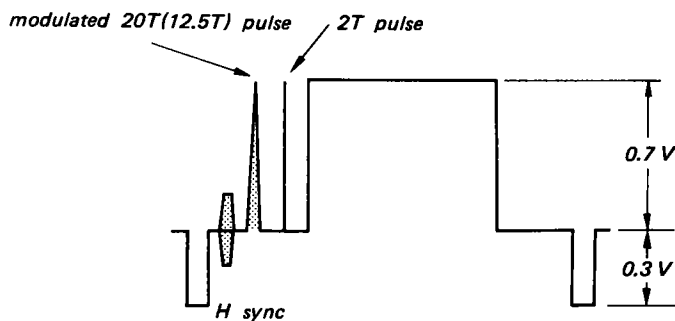

- Gated Sweep Signal;

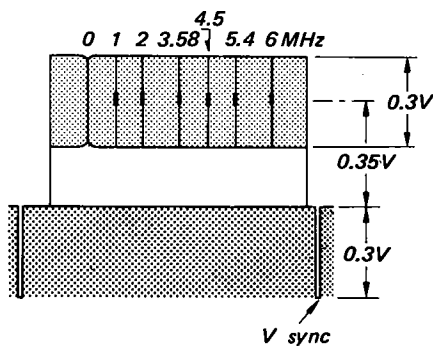

- Sweep Signal;



## 11-1. PLAYBACK RF AMPLIFIER ADJUSTMENT

### 11-1-1. PB RF Frequency Response Adjustment

- .Playing back the RF sweep segment of Alignment Tape.
- .Short between TP7 and E on SV-44 board with jumper lead.
- .Short between TP25,TP26 and TP40 on VO-9 board with jumper leads.
- .Set the TRACKING control to its center detent.


#### (1) 6.0MHz Tuning Adjustment

- .Short between TP25,TP26 and TP40 on VO-9 board with jumper leads.
- .RV17(CH-A)and RV19(CH-B); Fully clockwise.
- .RV18(CH-A)and RV20(CH-B); Fully clockwise.

Check point; TP29/VO-9

Trig; TP22/SV-44

Spec;

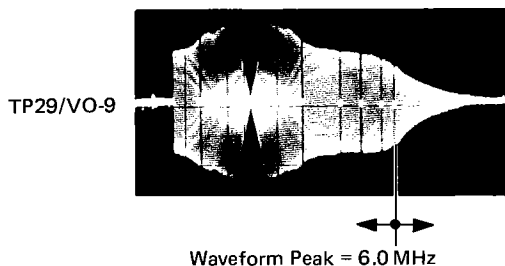

Adj; CV2/VO-9(CH-A)  
CV3/VO-9(CH-B)


#### (2) 4.5MHz Tuning Adjustment

- .RV17(CH-A)and RV19(CH-B); Fully counterclockwise.
- .RV18(CH-A)and RV20(CH-B); Fully clockwise.

Check point; TP29/VO-9

Trig; TP22/SV-44

Spec;

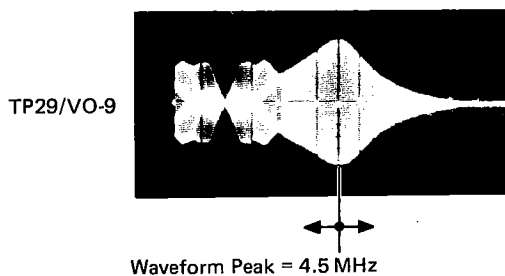


Adj; LV5/VO-9(CH-A)  
LV6/VO-9(CH-B)

### (3) Frequency Response Adjustment

Check point; TP29/VO-9

Trig; TP22/SV-44

Spec;

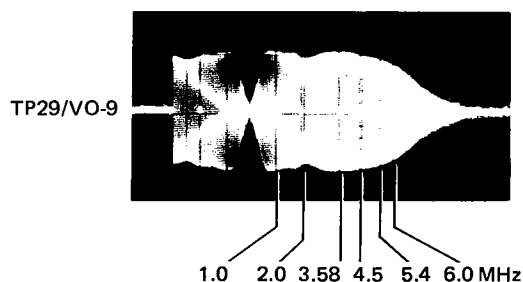

#### RR5-2SA

2.0MHz	3.58MHz	4.5MHz	5.4MHz	6.0MHz
100% REF.	114% ±10%	104% ±10%	84% ±10%	70% ±10%

#### RR5-3SA

2.0MHz	3.58MHz	4.5MHz	5.4MHz	6.0MHz
100% REF	120% ±10%	112% ±10%	96% ±10%	88% ±10%

Adj; RV17/RV18(CH-A)  
RV19/RV20(CH-B)


### 11-1-2. PB Y-RF Output Balance Adjustment

.Playing back the color bar segment of Alignment Tape.  
.Set the TRACKING control to its center detent.

Check point; TP29/VO-9

Trig; TP22/SV-44

Spec;

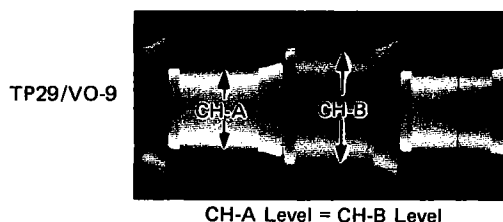

Adj; RV22/VO-9


### 11-1-3. PB Y-RF Output Level Adjustment

.Playing back the color bar segment of Alignment Tape.  
.Set the TRACKING control to its center detent.

Check point; TP29/VO-9

Trig; TP22/SV-44

Spec;

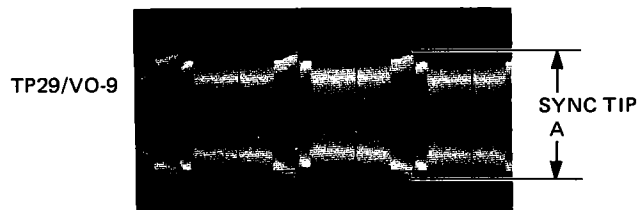

RR5-2SA  
 $A=0.7V \pm 0.1V_{p-p}$

RR5-3SA  
 $A=0.65V \pm 0.05V_{p-p}$

Adj; RV26/VO-9


### 11-1-4. PB Chroma-RF Output Balance Adjustment

.Playing back the color bar segment of Alignment Tape.  
.Set the TRACKING control to its center detent.

Check point; TP30/VO-9

Trig; TP22/SV-44

Spec;

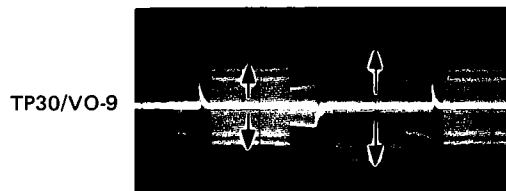

Adj; RV21/VO-9

### 11-1-5. PB Chroma-RF Output level Adjustment

- .Playing back the color bar segment of Alignment Tape.
- .Set the TRACKING control to its center detent.

Check point; TP30/VO-9

Trig; TP22/SV-44

Spec;



Adj; RV23/VO-9

**NOTE; Do not use the Alignment Tape,RR5-1S.**

### 11-2. Y AMPLIFIER ADJUSTMENT



#### 11-2-1. Noise Canceller Adjustment

- .STOP mode.
- .Temporarily connect the capacitor(220/10V) between TP14 and E2 on VO-9 Board.
- .Temporarily connect the GATED sweep.

Check point; TP16/VO-9

Trig; TP22/SV-44

Spec;

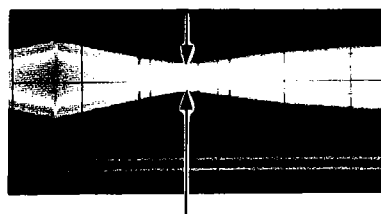

Minimize the amplitude of cross point  
(cross point; 1.8 MHz±0.4 MHz)

Adj; RV10/VO-9


### 11-2-2. Drop-Out Sensitivity Level Adjustment

.Playing back the RF sweep segment of Alignment Tape.

Check point; TP29/V0-9 and TP32/V0-9

Trig; TP22/SV-44

Spec;

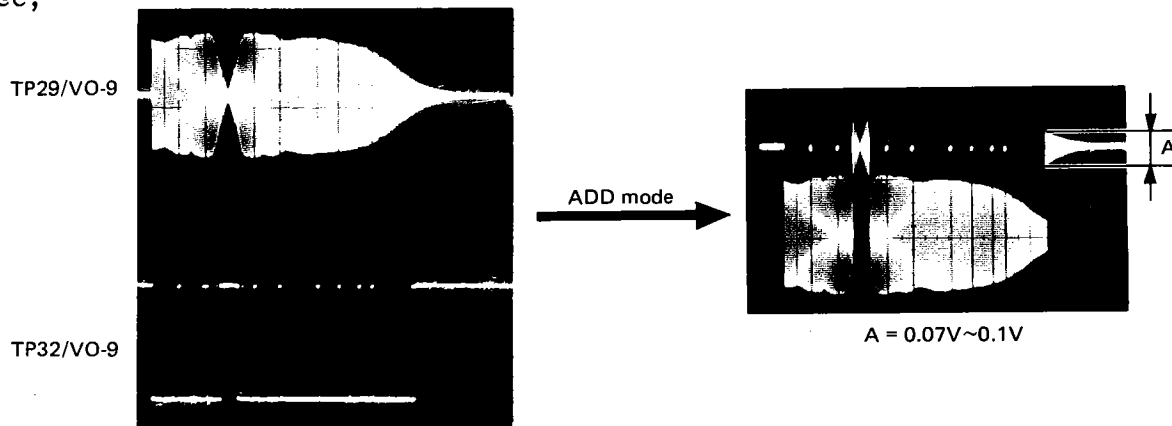

Adj; RV24/V0-9


### 11-2-3. Carrier Balance Adjustment

.Playing back the Monoscope segment of Alignment Tape.

Check point; TP13/V0-9

Trig; TP3/V0-9

Spec;

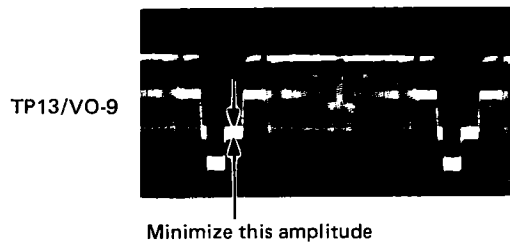

Adj; RV8/V0-9




#### 11-2-4. White Clip Adjustment

.VIDEO LINE IN; NTSC color bar signal.  
.EE mode.

Check point; TP17/V0-9

Trig; TP3/V0-9

Spec;

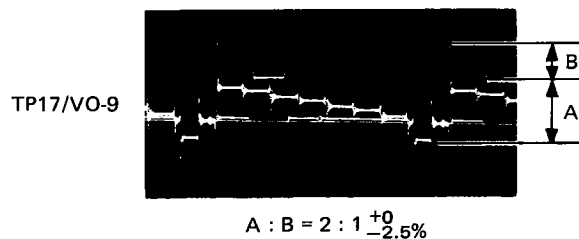

Adj; RV13/V0-9


#### 11-2-5. Y Output Level Adjustment

.Playing back the Color bar segment of Alignment Tape.  
.VIDEO LINE OUT: Terminated by 75 ohm Resistor.

Check point; TP16/V0-9

Trig; TP3/V0-9

Spec;

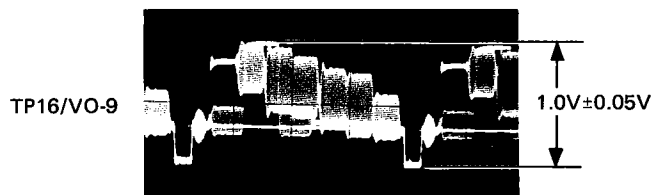

Adj; RV11/V0-9

### 11-2-6. SYNC Tip Carrier Frequency Adjustment

.No signal input.  
.EE mode.

Check point; TP19/V0-9

Spec;  $3.8\text{MHz} \pm 0.05\text{MHz}$

Adj; RV12/V0-9


### 11-2-7. FM Deviation Adjustment

.VIDEO LINE IN; NTSC color bar signal.  
.REC mode.  
.RV13/V0-9 fully clockwise.

Check point; TP16/V0-9

Trig; TP22/SV-44

Spec;

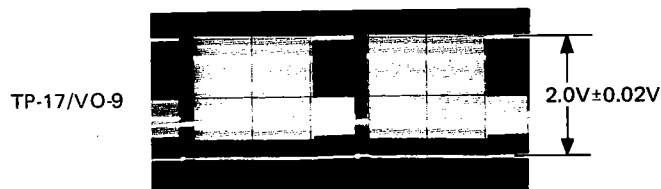

Adj; RV9/V0-9

Repeat the sequence of  
Adj--Recode--Playback(level check)  
until required specification is met.

#### NOTE:

After this adjustment, perform the sec 11-2-4, White Clip Adjustment.

### 11-2-8. False VD Adjustment

.Playing back the Alignment Tape.  
.PAUSE mode.

Check point; TP16 and TP27/VO-9


Trig; TP22/SV-44

Spec;

TP16/VO-6

CHOP mode

TP27/VO-9

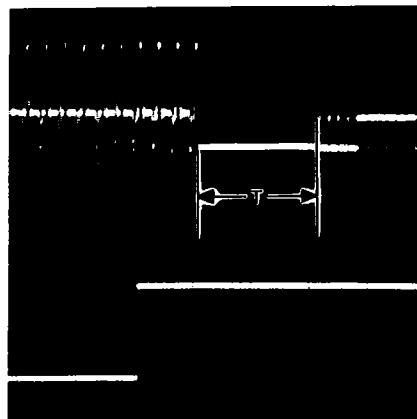

$T = 320\mu s \pm 20\mu s$

Adj: RV25/VO-9

### 11-2-9. REC Y Phase Equalizer Adjustment


.VIDEO LINE IN; Monoscope with burst.  
.EE mode.

Check point; TP13/VO-9


Trig; TP3/VO-9

Spec:


TP13/VO-9

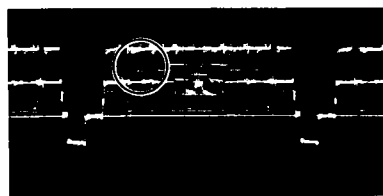

NG



OK



Adj: RV6/VO-9

VIDEO

# **11-2-10. PB Y Phase Equalizer Adjustment**


.Playing back the M.S w/burst segment of Alignment Tape.

Check point; TP13/V0-9


Trig; TP3/V0-9

Spec;


TP13/V0-9

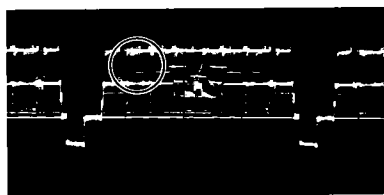

NG



OK



Adj; RV7/V0-9

### **11-3. CHROMA AMPLIFIER ADJUSTMENT**

#### **11-3-1. DUB Video Bias Trap Adjustment**

.Playing back the tape that has been recorded only CTL signal.  
.AUDIO DUB mode(CH-1).

Check point; TP30/V0-9

Spec; Minimize the amplitude

Adj; LV7/V0-9

\* To recorded only the CTL signal on tape;  
Short between TP19 and E2 with jumper lead and put the machine  
into the REC mode.

#### **11-3-2. 3.58MHz Reference Oscillator Frequency Adjustment**

.Playing back the color bar segment of Alignment Tape.

Check point; TP5/V0-9

Trig; TP5/V0-9

Spec; 3.579545MHz $\pm$ 5Hz

Adj; CV1/V0-9

#### **11-3-3. APC 4.27MHz Tuning Adjustment**

.Playing back the color segment of Alignment Tape.

Check point; TP6/V0-9

Trig; TP6/V0-9

Spec; Maximize the amplitude(4.267959MHz $\pm$ 1kHz)

Adj; LV1 and LV2/V0-9

#### 11-3-4. Chroma Converter Balance Adjustment

.Playing back the color bar segment of Alignment Tape.

Check point; TP10/VO-9

Trig; TP3/VO-9

Spec;



Minimize the amplitude  
(4.27 MHz leak)

Adj; RV4/VO-9


#### 11-3-5. Playback ACC Burst Tuning Adjustment

.Playing back the color bar segment of Alignment Tape.

Check point; TP10/VO-9

Trig; TP3/VO-9

Spec;

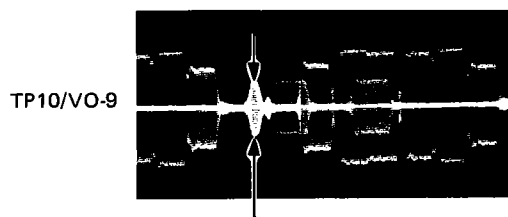

Minimize the Burst amplitude


Adj; LV4/VO-9

### 11-3-6. PB ACC Level Adjustment

.Playing back the color bar segment of Alignment Tape.

Check point; TP10/V0-9

Spec;

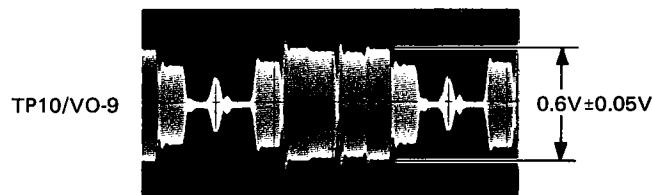

Adj; RV2/V0-9

### 11-3-7. VCO Frequency Level Adjustment

.Playing back the color bar segment of Alignment Tape.

Check point; TP4/V0-9

Spec;  $8.1V \pm 0.1V_{dc}$  and normal hue on the monitor screen.

Adj; RV1/V0-9


### 11-3-8. PB APC Gain Adjustment

.Playing back the color bar segment of Alignment Tape.

Check point; TP7/VO-9

Trig; TP3/VO-9

Spec;

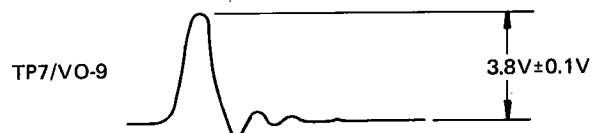

Adj; RV5/VO-9


### 11-3-9. REC Chroma Frequency Response Adjustment

.VIDEO LINE IN; The Gated sweep signal.  
.REC mode.

Check point; TP36/VO-9

Trig; TP22/SV-44

Spec;

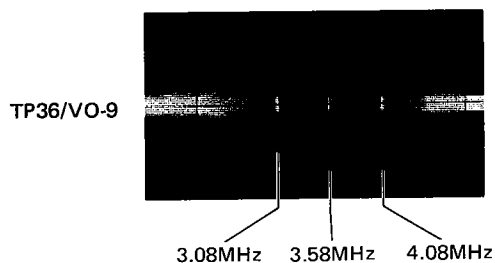

3.58MHz	3.08MHz	4.08MHz
100% REF.	90%±10%	90%±10%

Adj; LV3/VO-9

VIDEO




### 11-3-10. Chroma Mix Level Adjustment

.Playing back the color bar segment of Alignment Tape.  
.VIDEO LINE OUT:Terminated by 75 ohm Resistor.

Check point; TP16/VO-9

Trig; TP22/SV-44

Spec; (white peaklevel)=(chroma peak level)

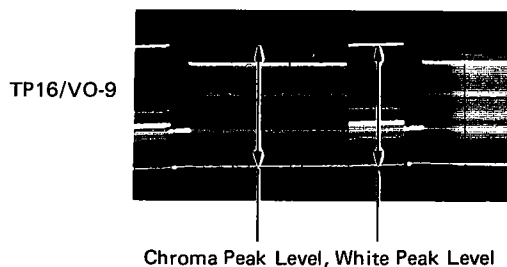

Adj; RV27/VO-9


### 11-3-11. 3.58MHz Trap Adjustment

.VIDIO LINE IN;NTSC color bar signal.  
.EE mode.

Check point; TP17/VO-9

Trig; TP3/VO-9

Spec;

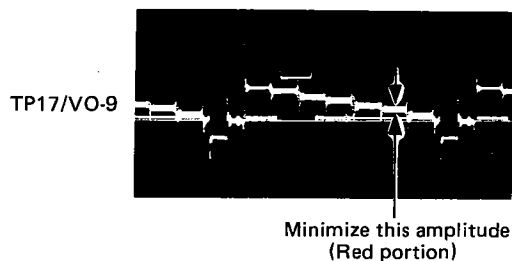

Adj; LV8/VO-9

## 11-4. RECORD AMPLIFIER ADJUSTMENT


### 11-4-1. Y REC Current Frequency Response Adjustment

- .VIDEO LINE IN; Monoscope Signal
- .Short between TP19 and E3 on VO-9 board with jumper lead.
- .Connect Sweep Signal, between TP20 and E3 on VO-9 board.
- .Unsolder temporarily, between TP21 and TP22 (TP23 and TP24) on VO-9 Board.
- .Connect temporarily 1 ohm resistor between TP21 and TP22 (TP23 and TP24) on VO-9 board.
- .Short between TP21 (TP23) and E1 on VO-9 board. (CH-B)
- .REC mode.

Check point; TP21 and TP22/VO-9(CH-A), TP23 and TP24/VO-9(CH-B)

Spec;

Waveform of between  
TP21 and TP22, or  
TP23 and TP24/VO-9



1.0MHz	4.5MHz
100% REF.	74% +5%

Adj; RV15(CH-A)  
RV16(CH-B)

After this adjustment, remove 1 ohm resistor and solder between TP21 and TP22 (TP23 and TP24)/VO-9 board.

### 11-4-2. Y REC Current Level Adjustment


- .VIDEO LINE IN;NTSC color video signal.
- .Unsolder temporarily,between TP21 and TP22 (TP23 and TP24) on VO-9 Board.
- .Connect temporarily 1 ohm resistor between TP21 and TP22 (TP23 and TP24) on VO-9 Board.
- .Short between TP21(TP23) and E1 on VO-9 board.( )CH-B
- .REC mode.

Check point; Waveform of between TP21(TP23)/VO-9 and TP22(TP24)/VO-9  
( ) is CH-B

Trig; TP-22/SV-44

Spec; sync tip level

Waveform of between  
TP21 and TP22, or  
TP23 and TP24/VO-9

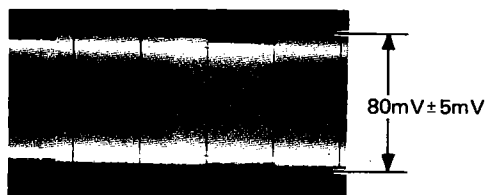

Adj; RV14/VO-9

After this adjustment, remove 1 ohm resistor and solder between TP21 and TP22 (TP23 and TP24)/VO-9 board.

### 11-4-3. Chroma REC Current Level Adjustment


- .VIDEO LINE IN;NTSC color Bar Signal.
- .Self Record then Playback mode.

Check point; TP30/VO-9

Trig; TP22/SV-44

Spec; Playback level of the Self Recorded Tape

TP30/VO-9

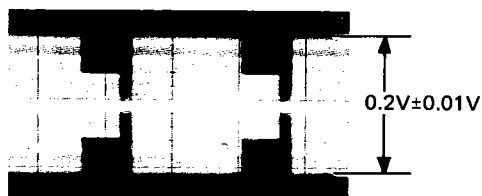

Repeat the sequence of  
adj--record--playback(level check)until required  
specification is met.

Adj; RV3/VO-9

## 11-5. Y/CHROMA DELAY TIME ADJUSTMENT

.This adjustment is usually not necessary since Y/Chroma delay time variation among multiple recorders and players are negligibly small.

### 11-5-1. Y/C Delay Time Adjustment



.VIDEO LINE IN;  $\sin^2$  wave signal.

.Playing back the Self Recorded Tape.


Check point; TP16/V0-9

Trig; TP3/V0-9


Spec;

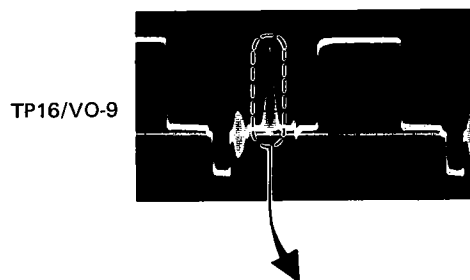

NG



OK



NG


Repeat the sequence of  
Adj--Recode--Playback(level check)  
until required specification is met.

Adj; DL1/V0-9


# SECTION 12

## BLOCK DIAGRAMS AND TIMING CHARTS


### HEAD LOCATION

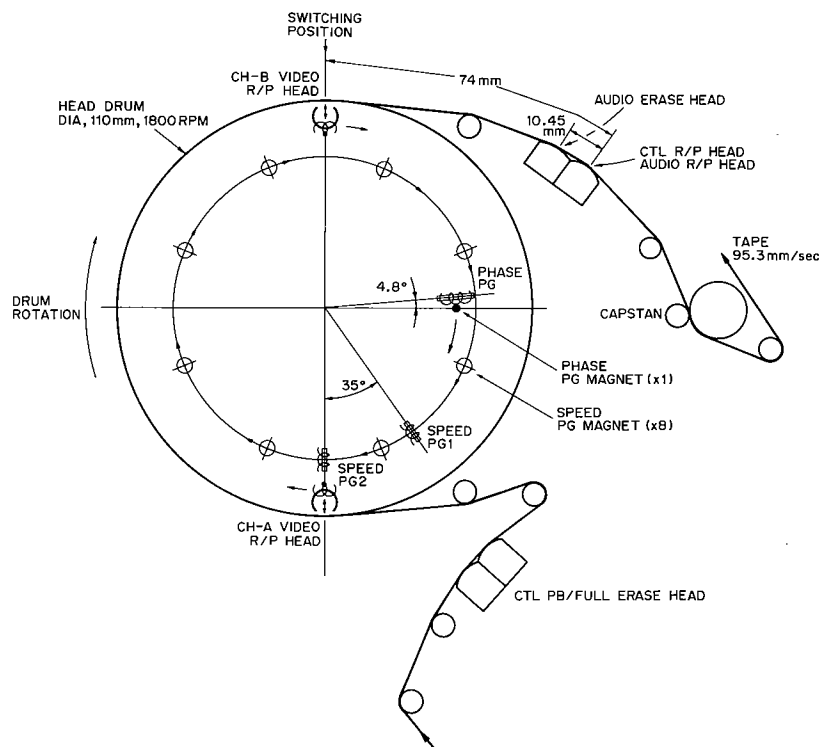

### TAPE PATTERN

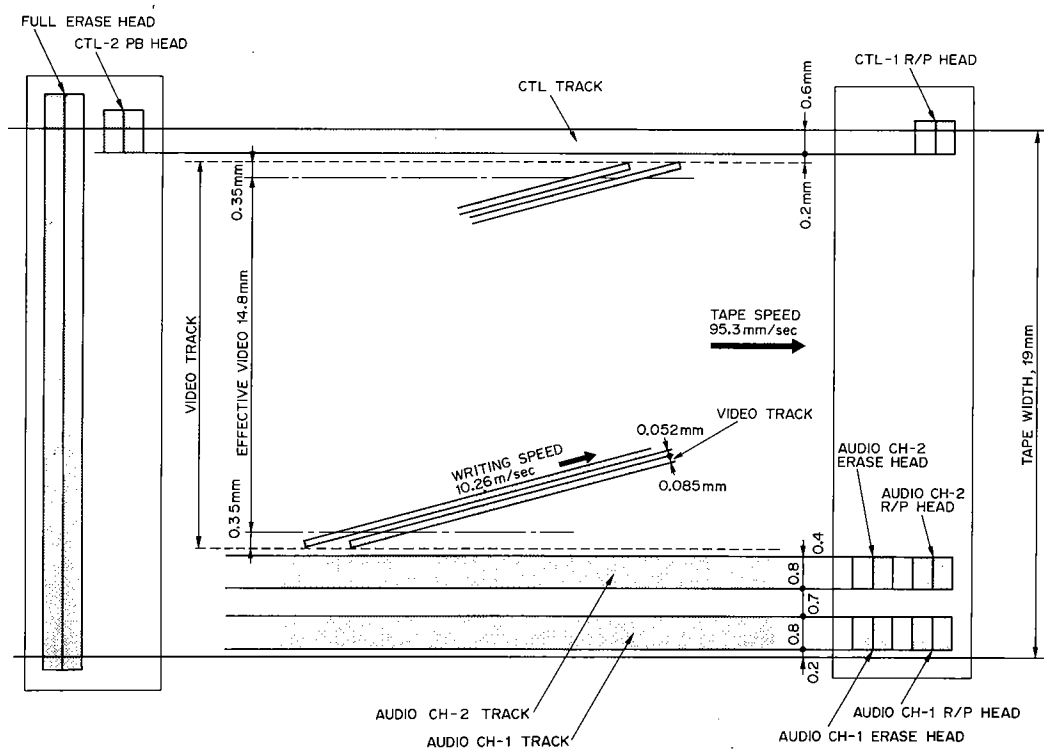

# FREQUENCY ALLOCATION

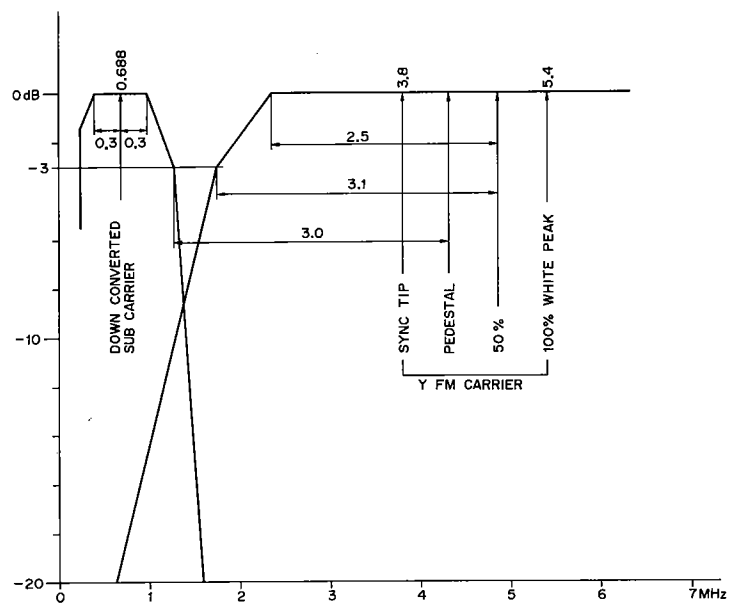


# TIMING CHART


# TIMING CHART

## VIDEO TIMING CHART


### DRUM SPEED PWM SERVO

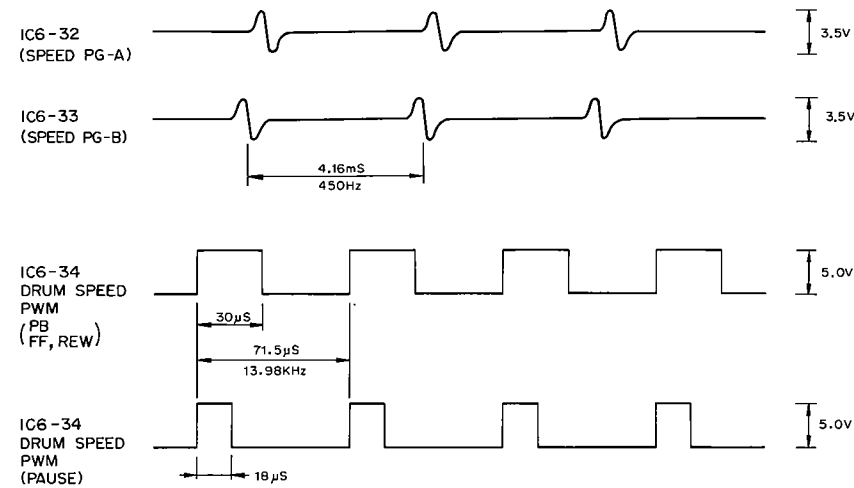


### DRUM PHASE PWM SERVO

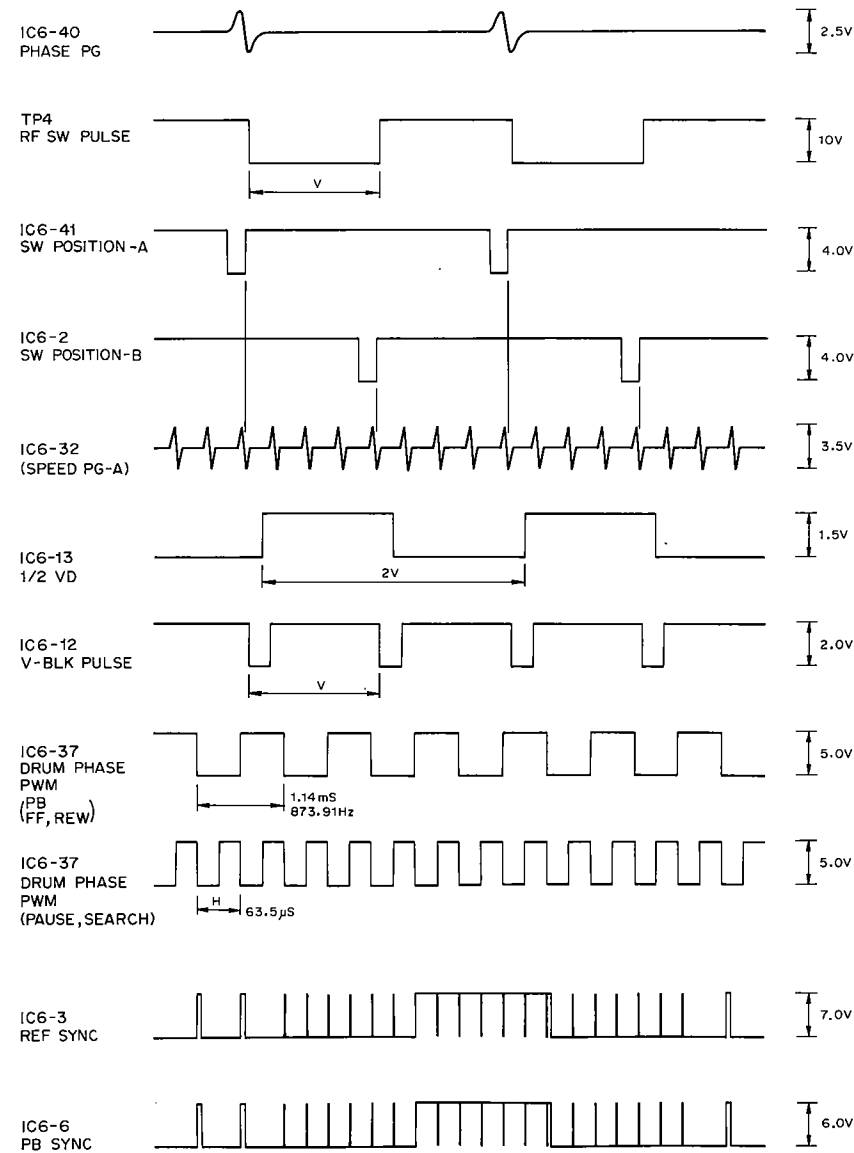

### CAPSTAN SPEED PWM SERVO

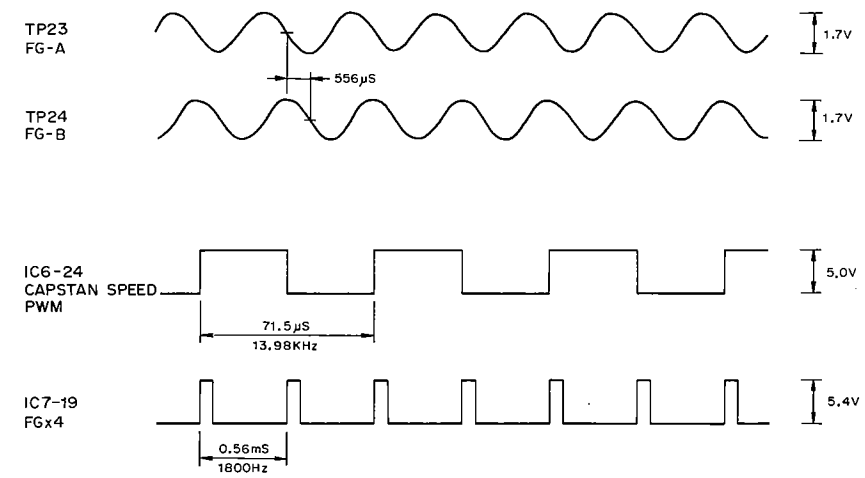

### CAPSTAN PHASE PWM SERVO

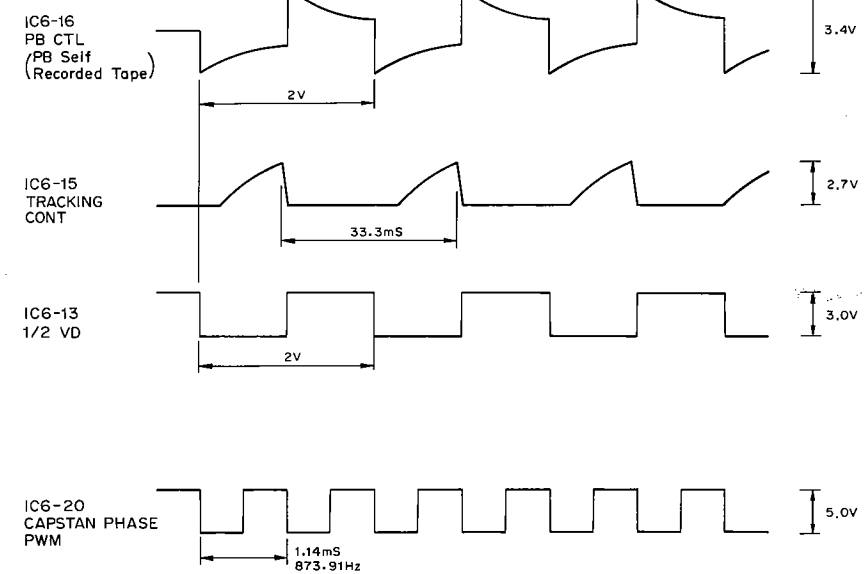

12-17


12-18



## SECTION 14 PRINTED WIRING BOARD AND SCHEMATIC DIAGRAMS


LOCATION OF MAIN PARTS

<TOP VIEW>

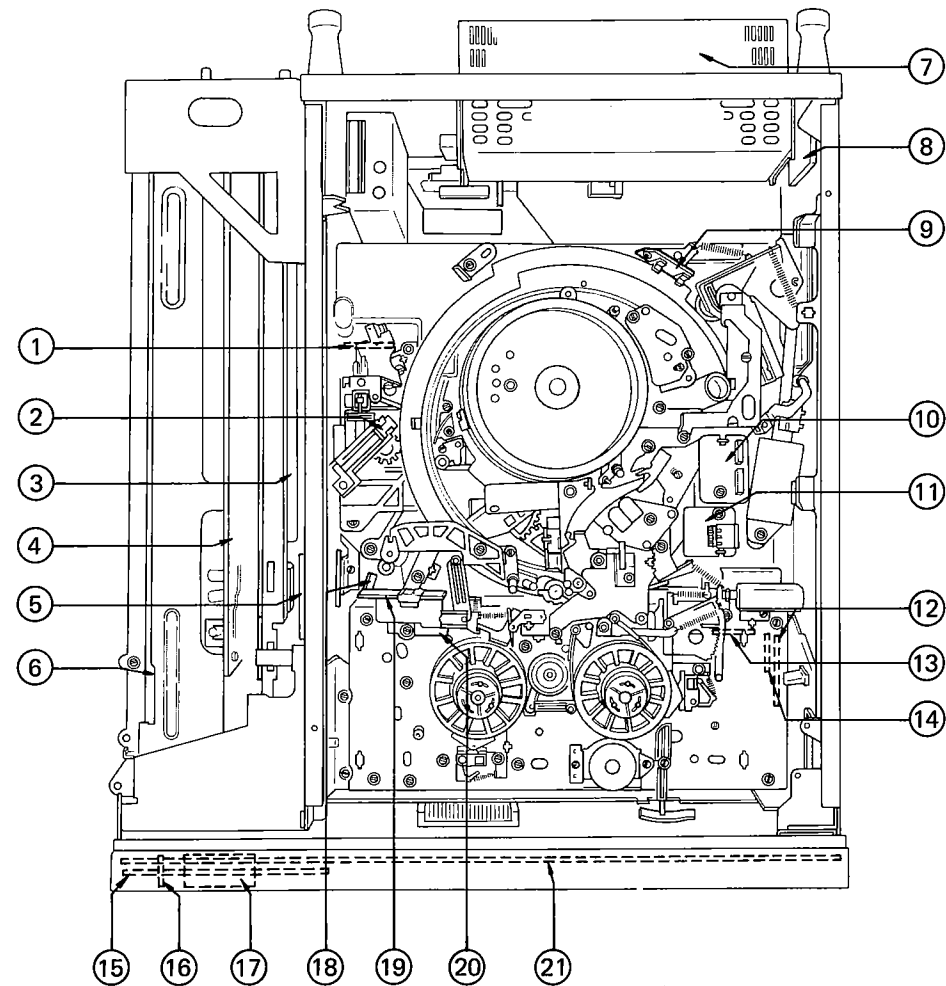

- ②② AC-26/AC-45 BOARD
- ⑩ AH-3 BOARD
- ⑥ AU-28 BOARD
- ⑫ CC-9 BOARD (Assembled into cassette-up compartment)
- ⑬ CC-10 BOARD (Assembled into cassette-up compartment)
- ⑭ CC-11 BOARD (Assembled into cassette-up compartment)
- ⑤ CN-42 BOARD
- ⑧ DC-13 BOARD
- ②③ DR-17 BOARD
- ⑪ EC-19 BOARD








<REAR VIEW>

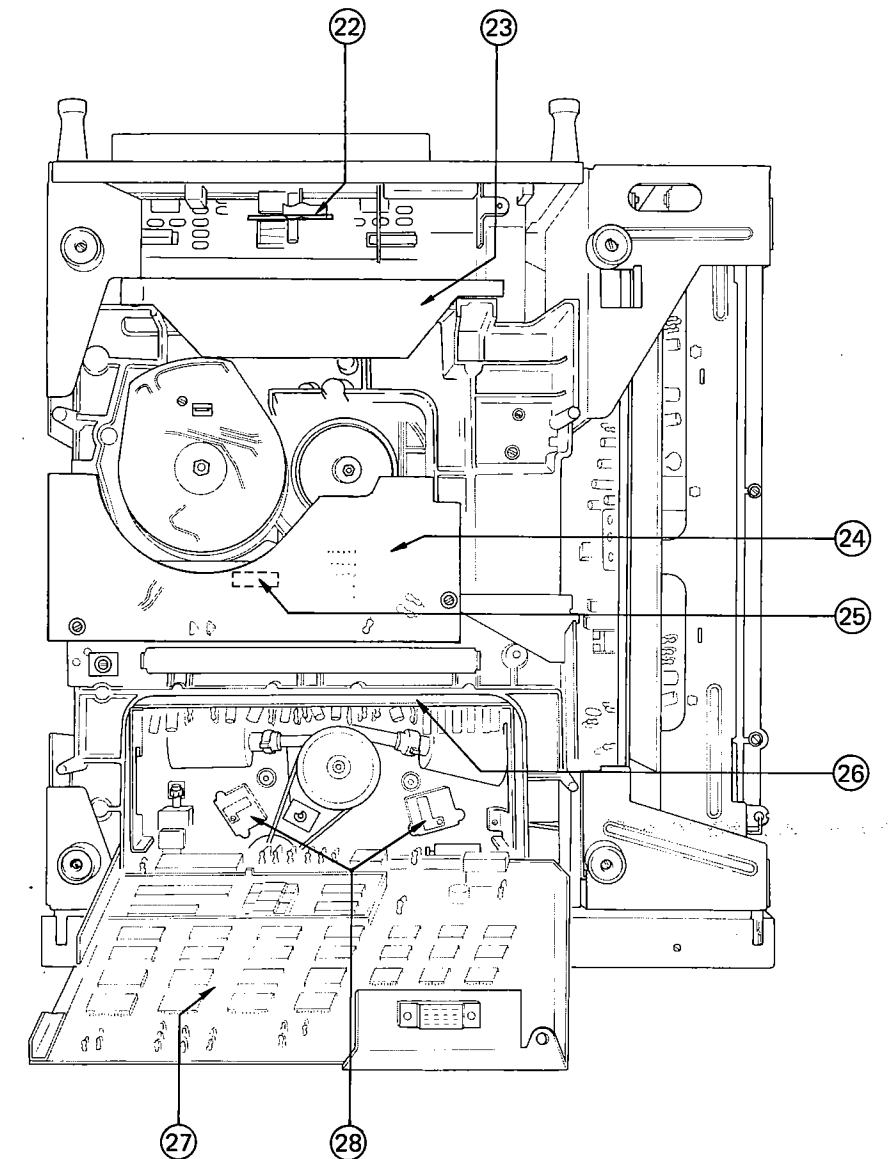

- ⑨ FR-11 BOARD
- ⑩ HP-6 BOARD
- ②① KY-21 BOARD
- ① LM-9 BOARD
- ②⑤ MC-14 BOARD
- ②⑦ MI-5 BOARD
- ②④ MR-8/MR-11A BOARD
- ②⑥ PD-16A BOARD
- ②⑩ PH-4 BOARD
- ② PH-5 BOARD
- ②⑤ PT-9 BOARD
- ④ SV-44 BOARD
- ②⑧ SW-43 BOARD
- ②⑨ SW-46 BOARD
- ②⑧ SW-50 BOARD
- ②⑦ SY-75 BOARD
- ⑦ UR-01 (Switching regulator)
- ③ VO-9 BOARD

## SEMICONDUCTOR ELECTRODES




TYPE	INTERCHANGEABILITY				PAGE
CD4001AE/BE CD4011AE/BE CD4012AE/BE CD4013AE/BE CD4016AE/BE CD4023AE/BE CD4024AE/BE CD4025AE/BE CD4030AE/BE	TC4001BP TC4011BP TC4012BP TC4013BP TC4016BP TC4023BP TC4024BP TC4025BP TC4030BP	MB84001B MB84011B  MB84013B MB84016B	uPD4001BC uPD4011BC       uPD4030BC	HD14001BP HD14011BP	14-4
CD4053AE/BE CD4069AE/BE CD4071AE/BE CD4073AE/BE CD4075BE CD4081AE/BE	TC4053BP TC4069UBP TC4071BP TC4073BP TC4075BP TC4081BP	MB84069B	uPD4069UBC uPD4071BC   uPD4081BC	HD14053BP HD14069UBP	14-5
CD4013A CD40187 CD40188 CD40805					
CD40757 CD4519P CD4529P CD4543L CD4520BCP	TC4520BP				14-6
CD4538BCP CD4584BCP CD452903BP CD4558D-D CD47060AP CD45324C CD45358C CD45158H2	uPC4558C     LM358P	MC14538BCP	uPD4584BC		14-7

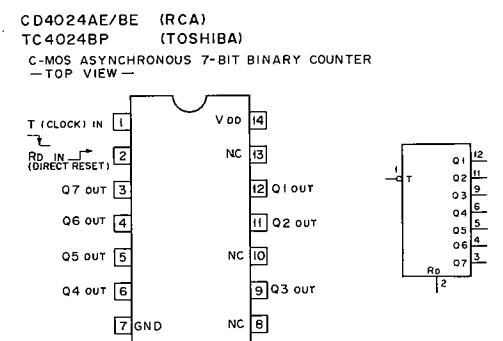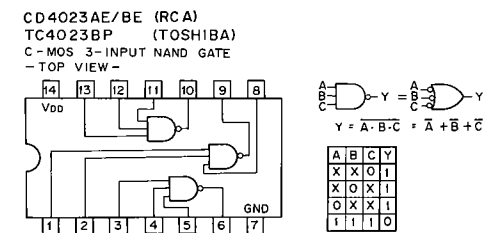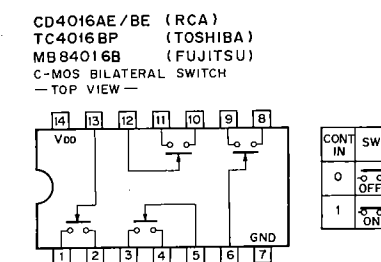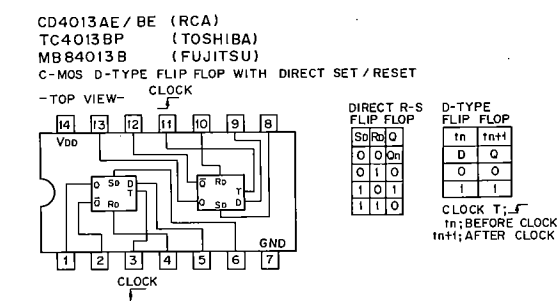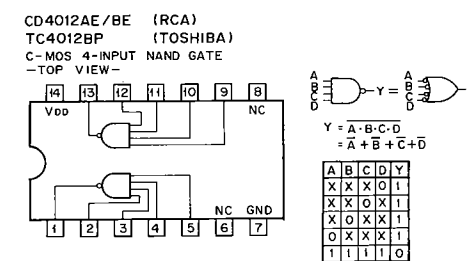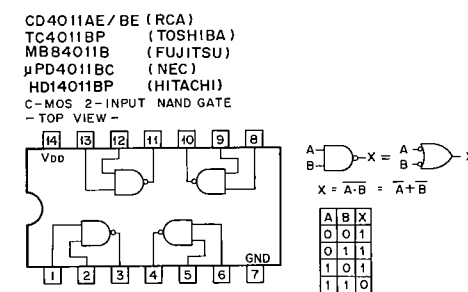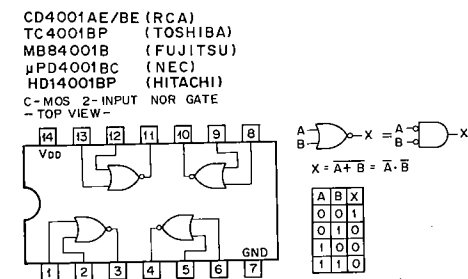


COUNT	INPUTS		OUTPUTS							
	T	R <sub>0</sub>	Q <sub>7</sub>	Q <sub>6</sub>	Q <sub>5</sub>	Q <sub>4</sub>	Q <sub>3</sub>	Q <sub>2</sub>	Q <sub>1</sub>	
0	X	1	0	0	0	0	0	0	0	
1	1	0	0	0	0	0	0	0	1	
2	1	0	0	0	0	0	0	1	0	
3	1	0	0	0	0	0	1	0	1	
4	1	0	0	0	0	1	0	0	0	
5	1	0	0	0	1	0	0	0	0	
6	1	0	0	1	0	0	0	0	0	
7	1	0	0	1	0	1	0	0	0	
8	1	0	1	0	0	0	0	0	0	
9	1	0	1	0	0	0	0	1	0	
10	1	0	1	0	1	0	0	0	0	
11	1	0	1	0	1	0	0	0	0	
12	1	0	1	1	0	0	0	0	0	
13	1	0	1	1	0	0	1	0	0	
14	1	0	1	1	1	0	0	0	0	
15	1	0	1	1	1	0	1	0	0	
16	1	0	1	1	1	1	0	0	0	
17	1	0	1	1	1	1	1	0	0	
18	1	0	1	1	1	1	1	1	0	
19	1	0	1	1	1	1	1	1	1	
20	1	0	1	1	1	1	1	1	1	
21	1	0	1	1	1	1	1	1	1	
22	1	0	1	1	1	1	1	1	1	
23	1	0	1	1	1	1	1	1	1	
24	1	0	1	1	1	1	1	1	1	
25	1	0	1	1	1	1	1	1	1	
26	1	0	1	1	1	1	1	1	1	
27	1	0	1	1	1	1	1	1	1	
28	1	0	1	1	1	1	1	1	1	
29	1	0	1	1	1	1	1	1	1	
30	1	0	1	1	1	1	1	1	1	
31	1	0	1	1	1	1	1	1	1	

O ; LOW  
 1 ; HIGH  
 X ; DONT' CARE

NO CHANGE

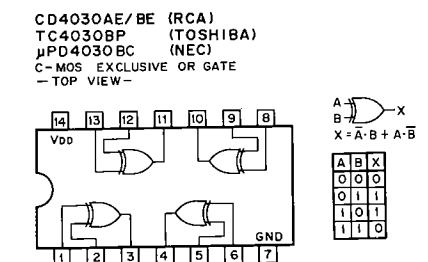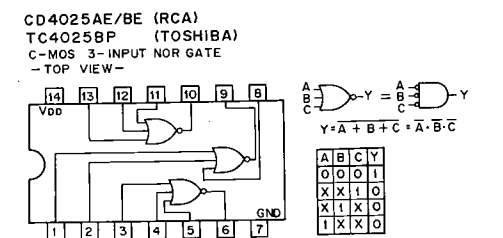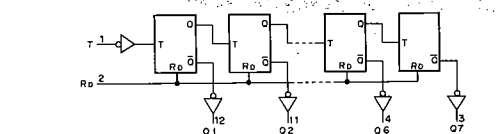








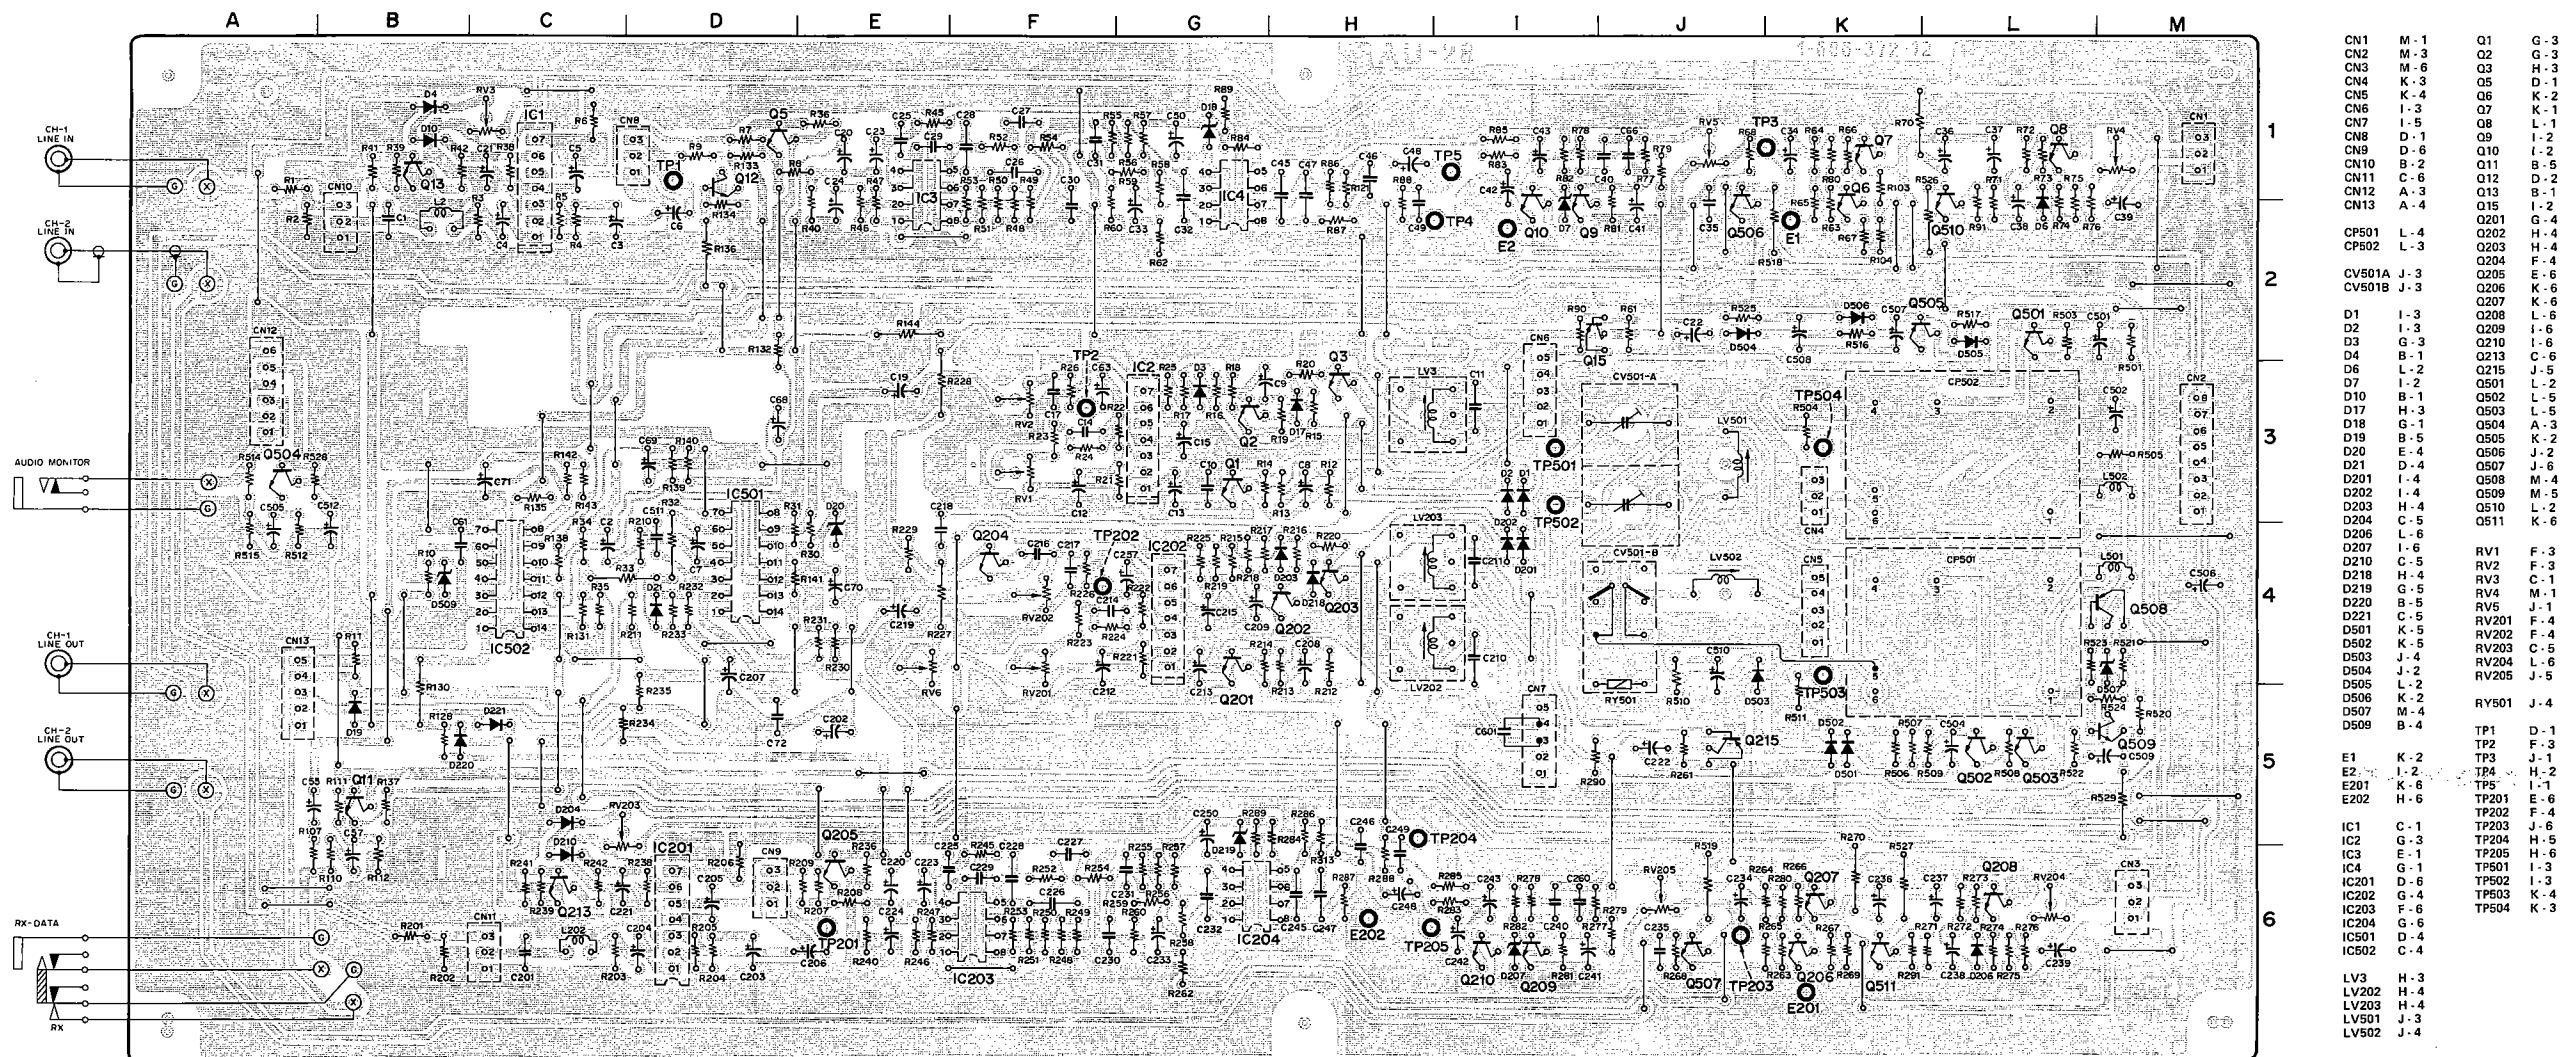



CN1	M-1	Q1	G-3
CN2	M-3	Q2	G-3
CN3	M-6	Q3	H-3
CN4	K-3	Q5	D-1
CN5	K-4	Q6	K-2
CN6	I-3	Q7	K-1
CN7	I-5	Q8	L-1
CN8	D-1	Q9	I-2
CN9	D-6	Q10	I-2
CN10	B-2	Q11	B-5
CN11	C-6	Q12	D-2
CN12	A-3	Q13	B-1
CN13	A-4	Q15	I-2
CP501	L-4	Q201	G-4
CP502	L-3	Q202	H-4
		Q203	H-4
		Q204	F-4
CV501A	J-3	Q205	E-6
CV501B	J-3	Q206	K-6
		Q207	K-6
		Q208	L-6
D1	I-3	Q209	I-6
D2	I-3	Q210	I-6
D3	G-3	Q213	C-6
D4	B-1	Q215	J-5
D6	L-2	Q501	L-2
D7	I-2	Q502	L-5
D10	B-1	Q503	L-5
D17	H-3	Q504	A-3
D18	G-1	Q505	K-2
D19	B-5	Q506	J-2
D20	E-4	Q507	J-6
D21	D-4	Q508	M-4
D201	I-4	Q509	M-5
D202	I-4	Q510	L-2
D203	H-4	Q511	K-6
D204	C-5		
D206	L-6		
D207	I-6	RV1	F-3
D210	C-5	RV2	F-3
D218	H-4	RV3	C-1
D219	G-5	RV4	M-1
D220	B-5	RV5	J-1
D221	C-5	RV201	F-4
D501	K-5	RV202	F-4
D502	K-5	RV203	C-5
D503	J-4	RV204	L-6
D504	J-2	RV205	J-5
D505	L-2		
D506	K-2	RV501	J-4
D507	M-4		
D508	B-4		
		TP1	D-1
		TP2	F-3
		TP3	J-1
E1	K-2	TP4	H-2
E2	I-2	TP5	I-1
E201	K-6	TP201	E-6
E202	H-6	TP202	F-4
		TP203	J-6
		TP204	H-5
		TP205	H-6
		TP501	I-3
		TP502	I-3
		TP503	K-4
		TP504	K-3
IC1	C-1		
IC2	G-3		
IC3	E-1		
IC4	G-1		
IC201	D-6		
IC202	G-4		
IC203	F-6		
IC204	G-6		
IC501	D-4		
IC502	C-4		
LV3	H-3		
LV202	H-4		
LV203	H-4		
LV501	J-3		
LV502	J-4		

AU-28 - SOLDERING SIDE -


3 (AUDIO REC/PB HEAD)  
19 (ERASE/CTL PB HEAD)

MI-5 (MIC INPUT)  
HP-6 (HEADPHONES)

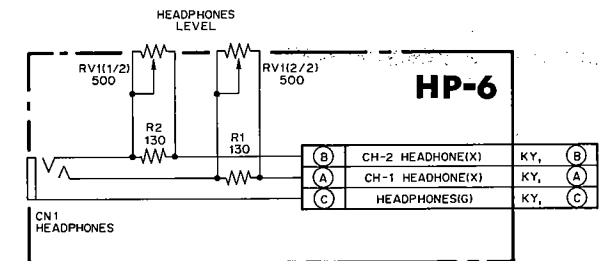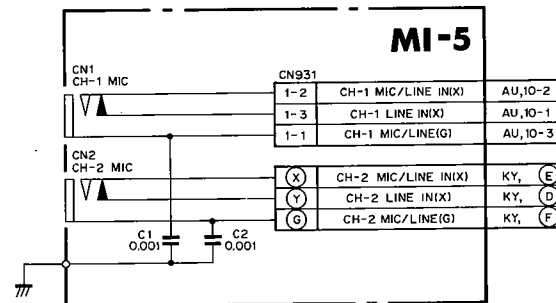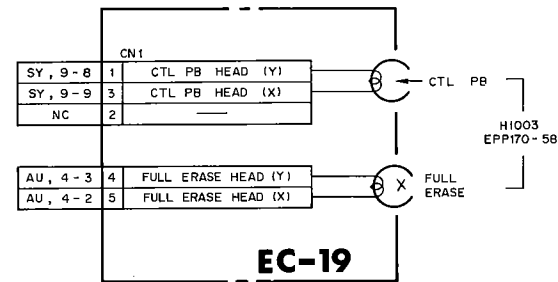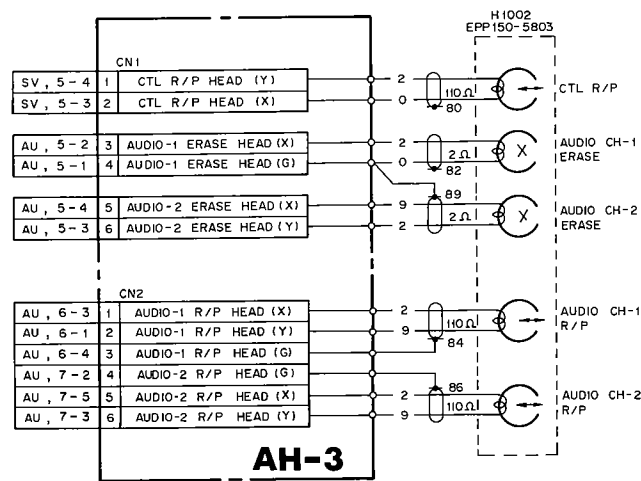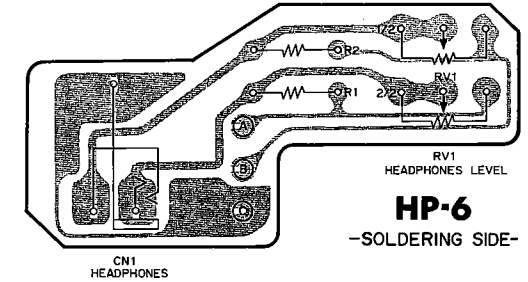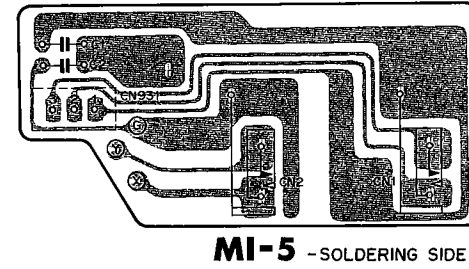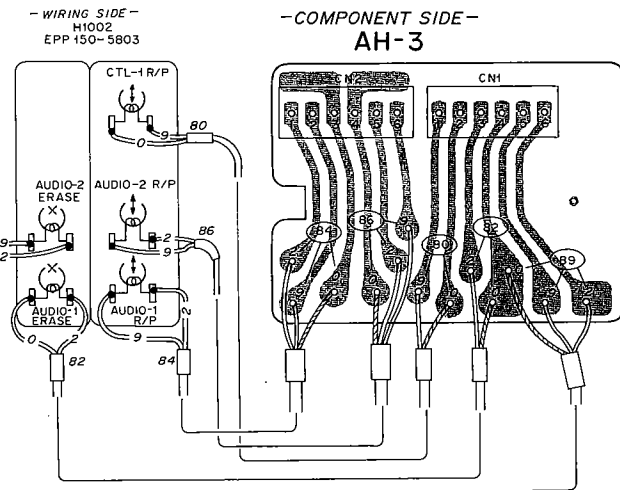

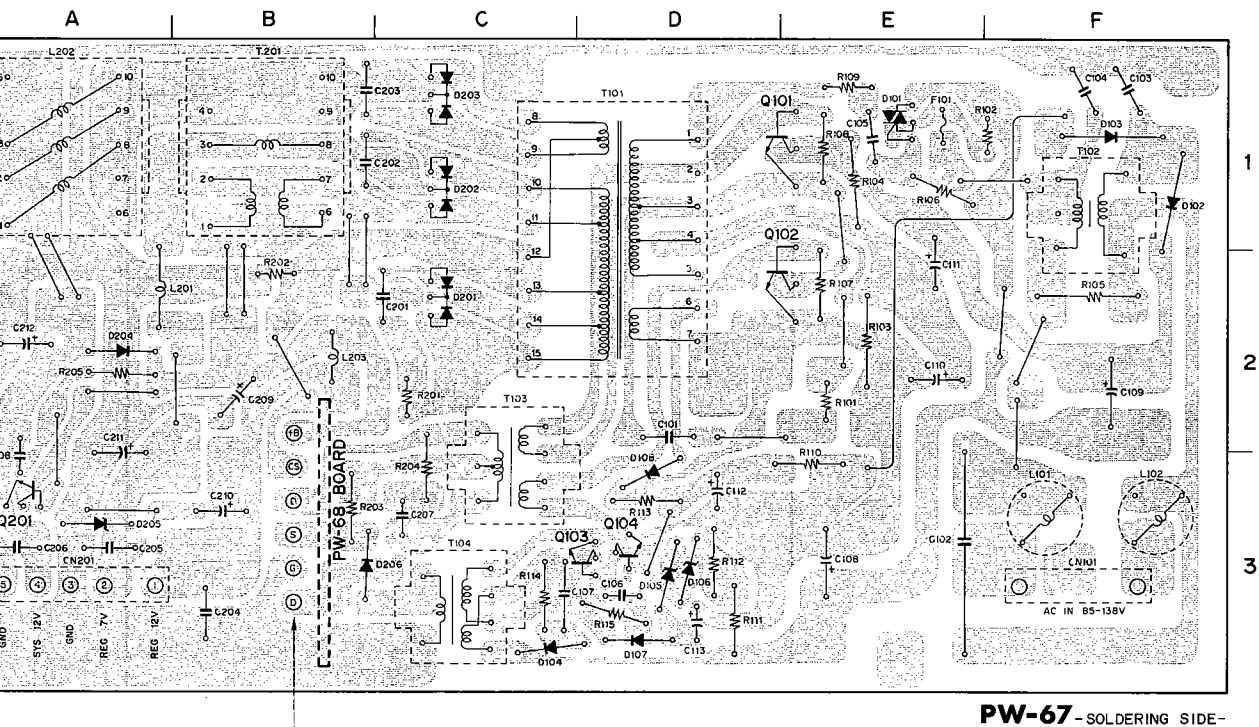


**PW-67** - SOLDERING SIDE-

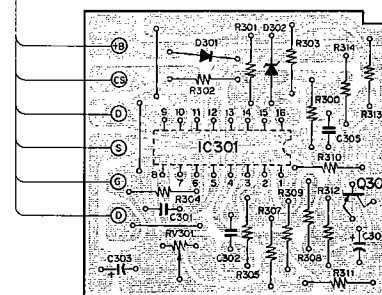


**PW-68** -SOLDERING SIDE-


CN101	F - 3	F101	E - 1
CN201	A - 3		
D101	E - 1	Q101	E - 1
D102	F - 1	Q102	E - 2
D103	F - 1	Q103	D - 3
D104	C - 3	Q104	D - 3
D105	D - 3	Q201	A - 3
D106	D - 3	T101	D - 1
D107	D - 3	T102	F - 1
D108	D - 3	T103	C - 3
D201	C - 2	T104	C - 3
D202	C - 1	T201	B - 1
D203	C - 1		
D204	A - 2		
D205	A - 3		
D206	B - 3		

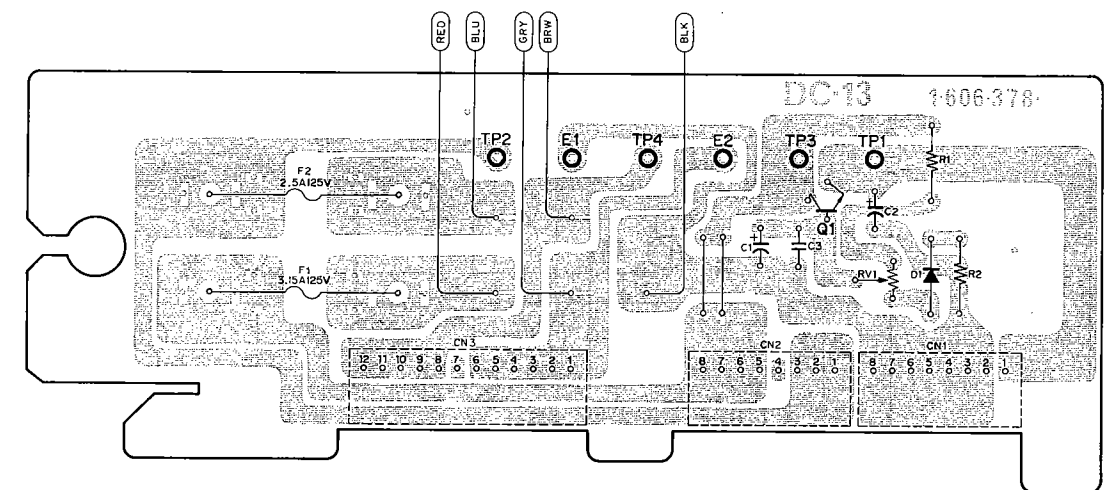

## DC-13-SOLDERING SIDE-

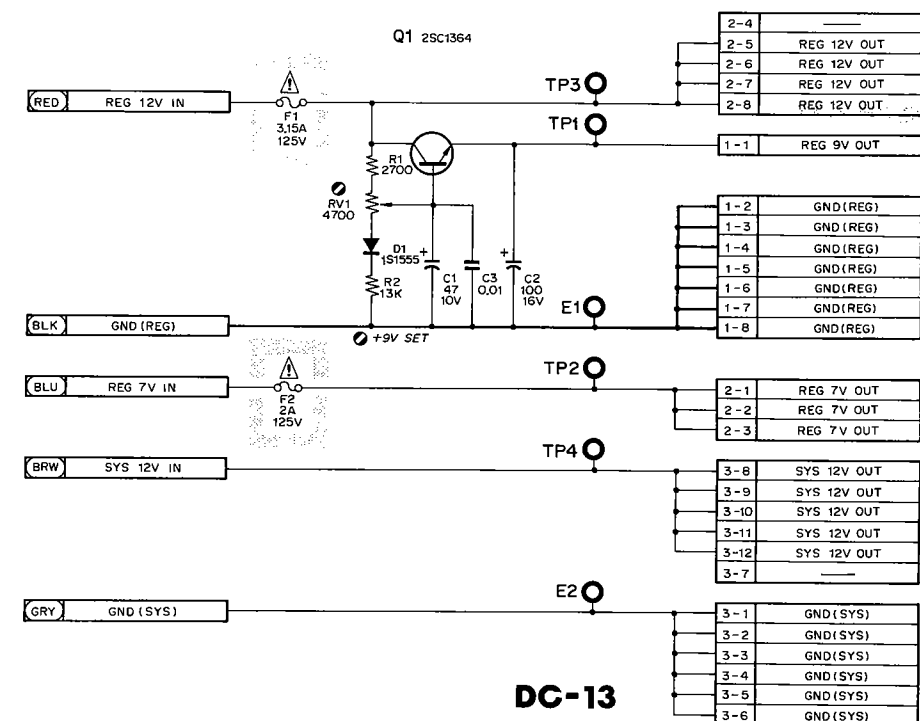


**DC-13**

**NOTE** The shaded and -marked components are critical to safety.  
Replace only with same components as specified.

## 8 (THREADING/REEL MOTOR DRIVER)

S/N UP TO 28150 (U/C)

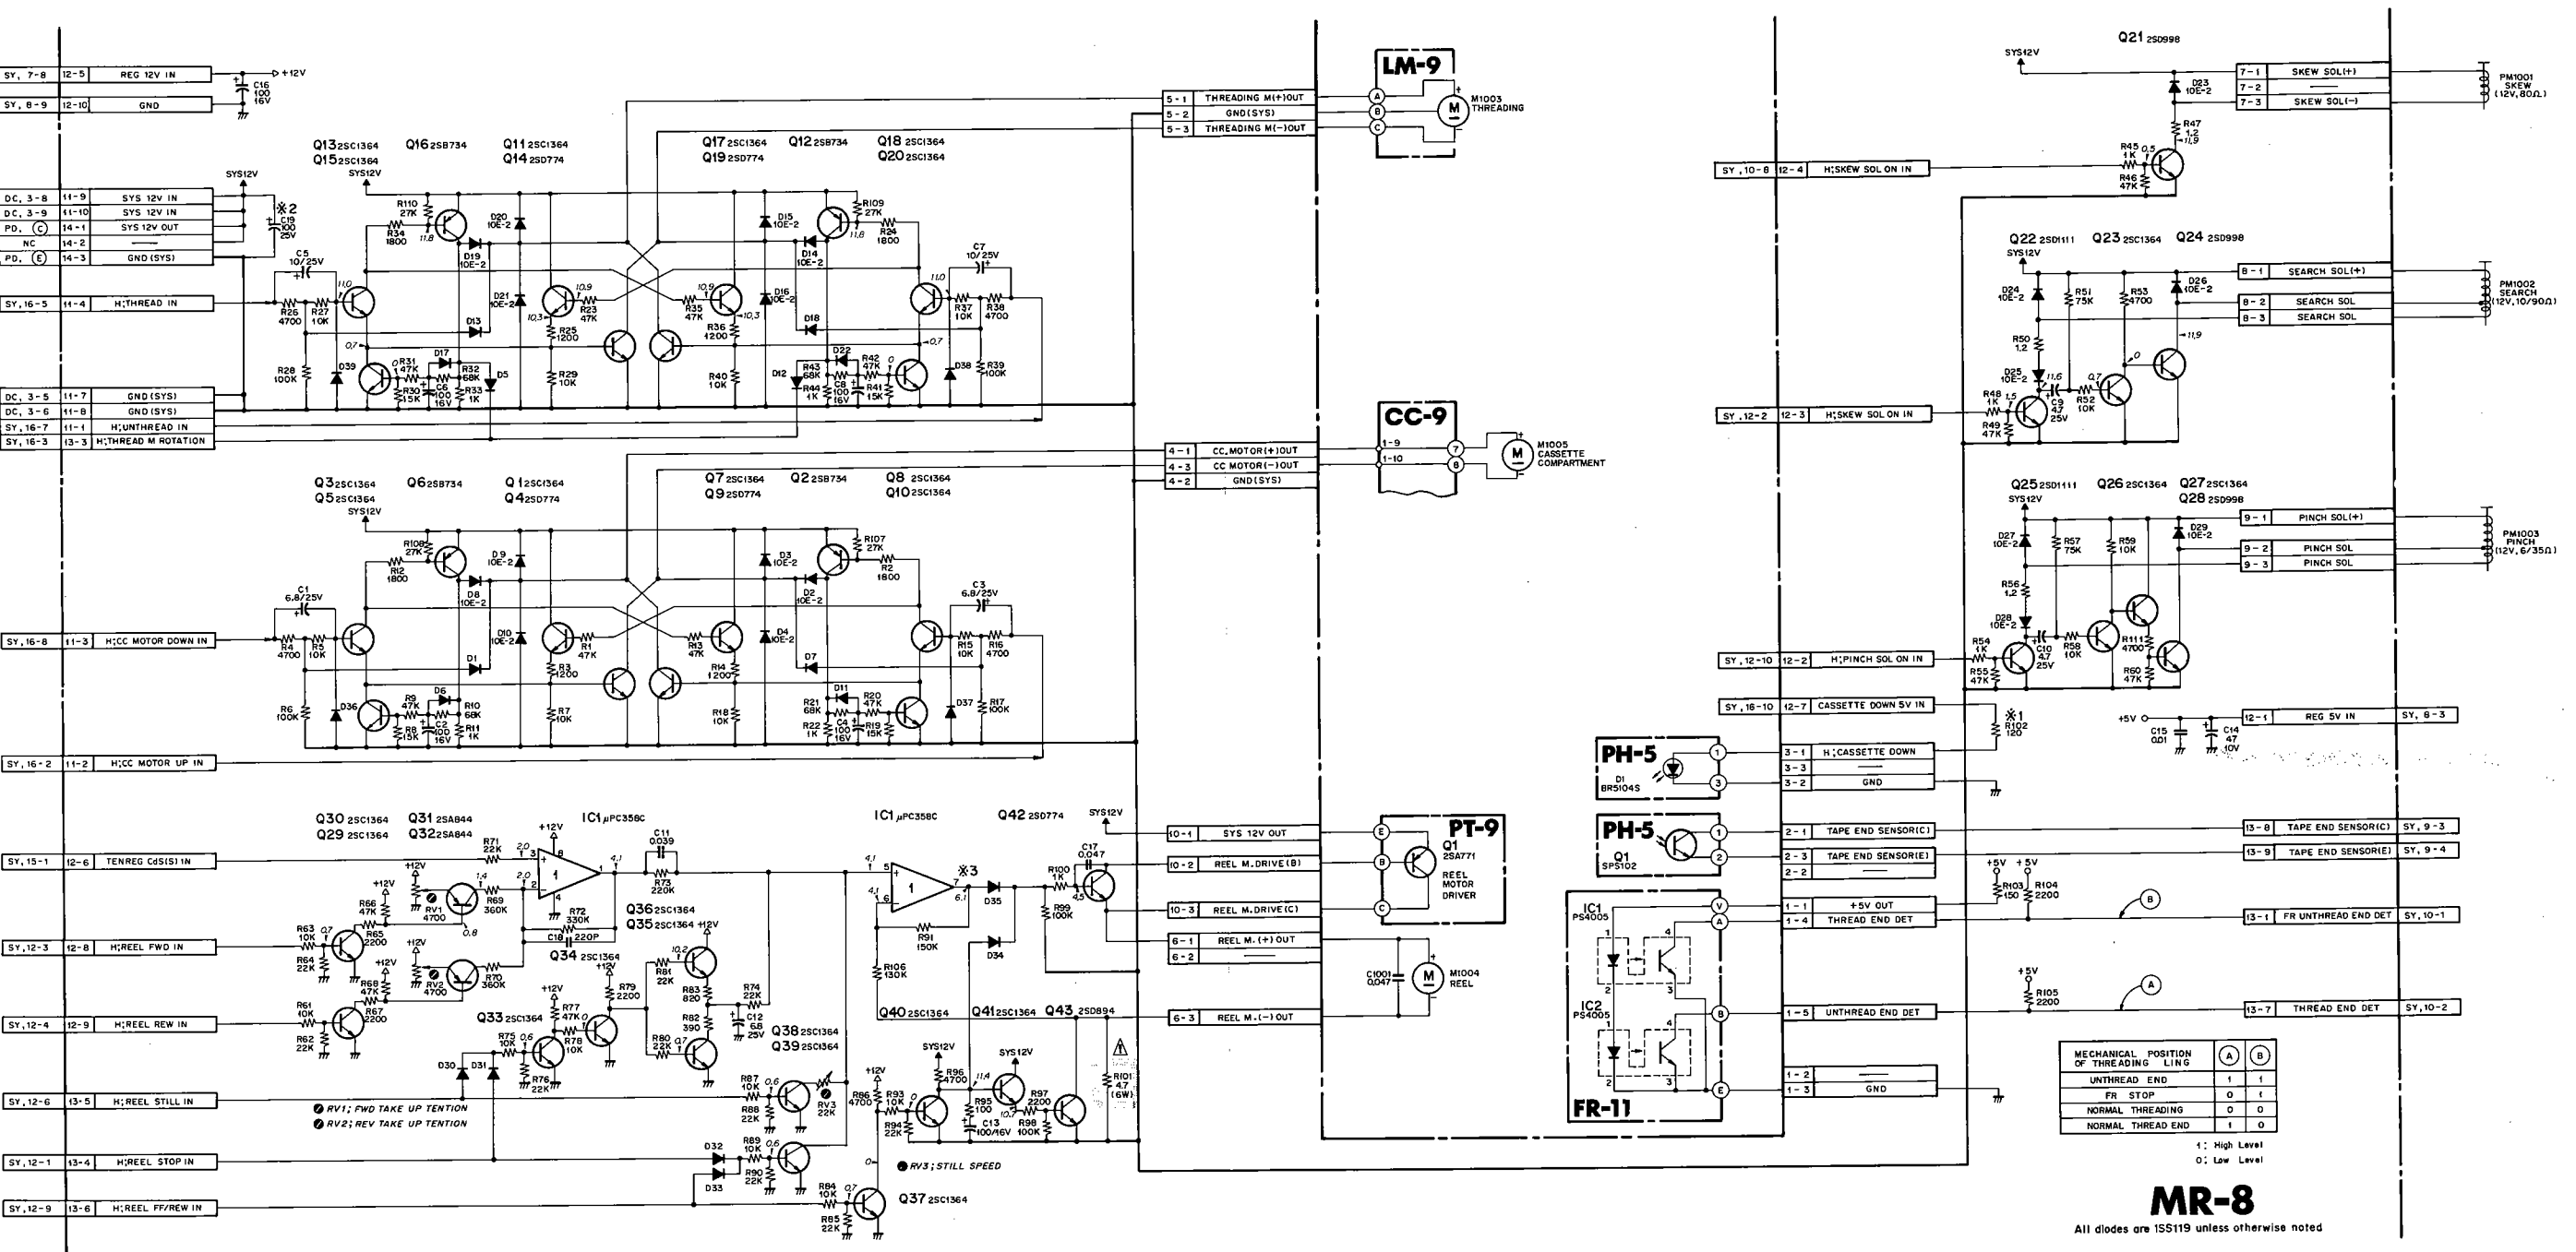

## NOTE:

MARK	CHANGE INFORMATION	SERIAL NO.	MARK	CHANGE INFORMATION	SERIAL NO.	MARK	CHANGE INFORMATION	SERIAL NO.
*1	R102 100 - 120	VO-5600 U/C: 17451 ~ " J: 10701 ~ VO-5630 AEP: 14541 ~ " UK: 11211 ~ " U/C: 10201 ~	*2	C19 100 25V ADDED	VO-5600 U/C: 21851 ~ " J: 11101 ~ VO-5630 AEP: 23241 ~ " UK: 12811 ~ " U/C: 10401 ~	*3	R92 1K DELETED	VO-5600 U/C: 22351 ~ " J: 11101 ~ VO-5630 AEP: 23241 ~ " UK: 12811 ~ " U/C: 10401 ~

NOTE: The shaded and  $\Delta$ -marked components are critical to safety.  
Replace only with same components as specified.

8 (THREADING/REEL MOTOR DRIVER)







11

9

5

9

S/N UP TO 28150 (U/C)

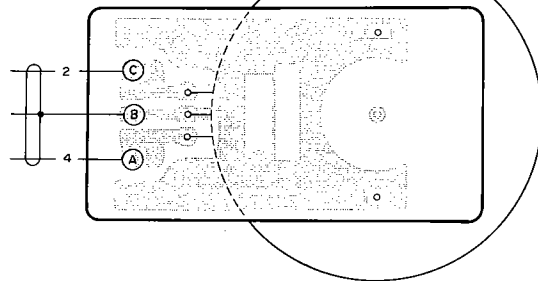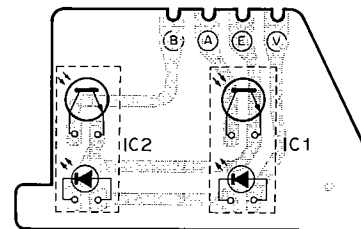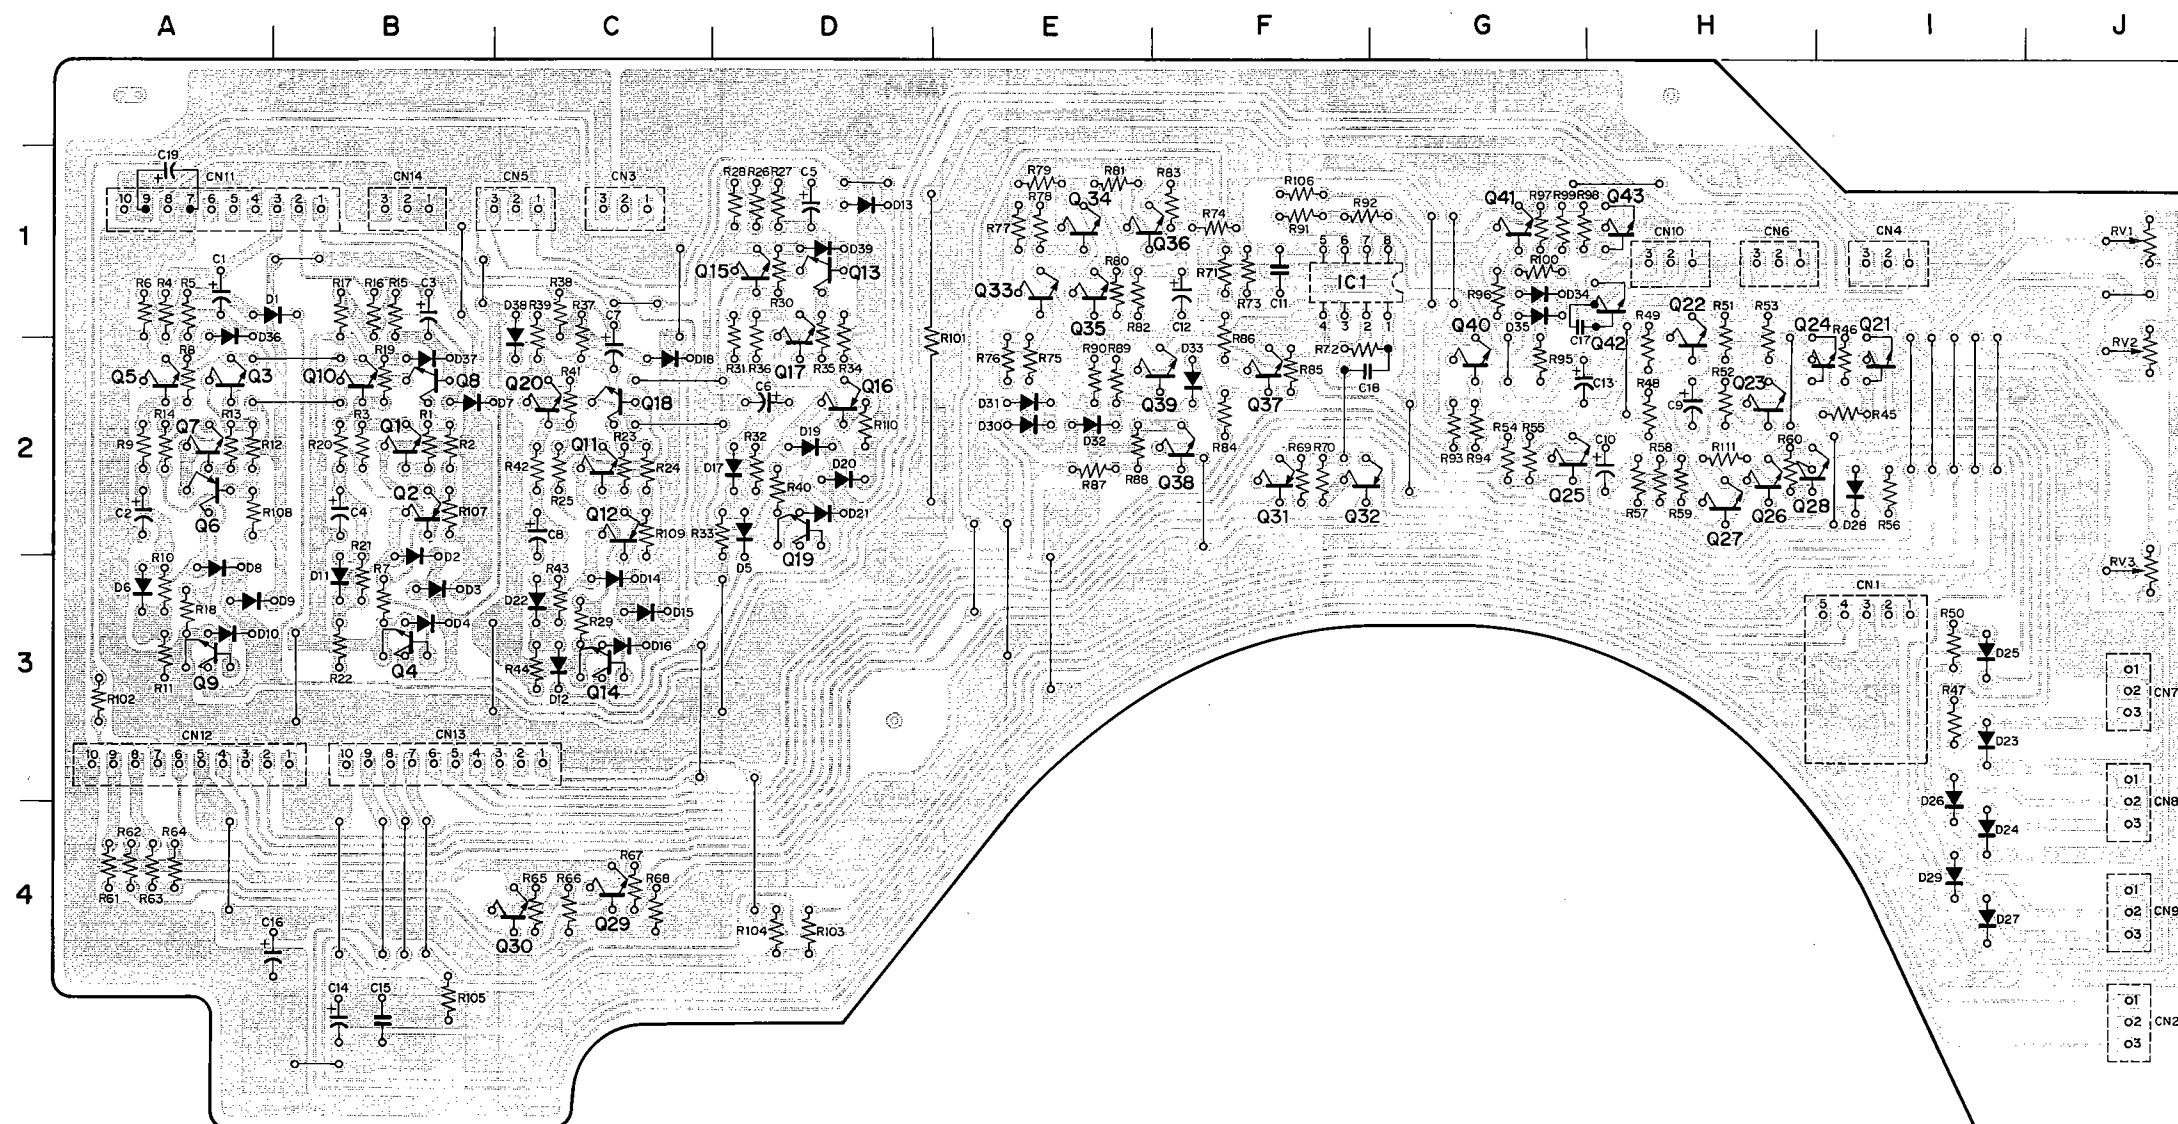M1003  
THREADING MOTOR**LM-9** - SOLDERING SIDE -**PT-9**  
- SOLDERING SIDE -**FR-11** - SOLDERING SIDE -**PH-5**  
- SOLDERING SIDE -**PH-5**  
- SOLDERING SIDE -**MR-8** - SOLDERING SIDE -


CN1	I - 3	Q1	B - 2
CN2	J - 4	Q2	B - 2
CN3	C - 1	Q3	A - 2
CN4	I - 1	Q4	B - 3
CN5	C - 1	Q5	A - 2
CN6	H - 1	Q6	A - 2
CN7	J - 3	Q7	A - 2
CN8	J - 3	Q8	B - 2
CN9	J - 4	Q9	A - 3
CN10	H - 1	Q10	B - 2
CN11	A - 1	Q11	C - 2
CN12	A - 3	Q12	C - 2
CN13	B - 3	Q13	D - 1
CN14	B - 1	Q14	C - 3
		Q15	D - 1
		Q16	D - 2
		Q17	D - 2
		Q18	C - 2
		Q19	D - 2
		Q20	C - 2
		Q21	I - 2
		Q22	H - 2
		Q23	H - 2
		Q24	I - 2
		Q25	G - 2
		Q26	H - 2
		Q27	H - 2
		Q28	I - 2
		Q29	C - 4
		Q30	C - 4
		Q31	F - 2
		Q32	F - 2
		Q33	E - 1
		Q34	E - 1
		Q35	E - 1
		Q36	E - 1
		Q37	F - 2
		Q38	F - 2
		Q39	F - 2
		Q40	G - 2
		Q41	G - 1
		Q42	H - 1
		Q43	H - 1
		RV1	J - 1
		RV2	J - 2
		RV3	J - 3
IC1	F - 1		



-11A (THREADING/REEL MOTOR DRIVER)

-11  
-9  
5  
9

S/N 28151 AND LATER

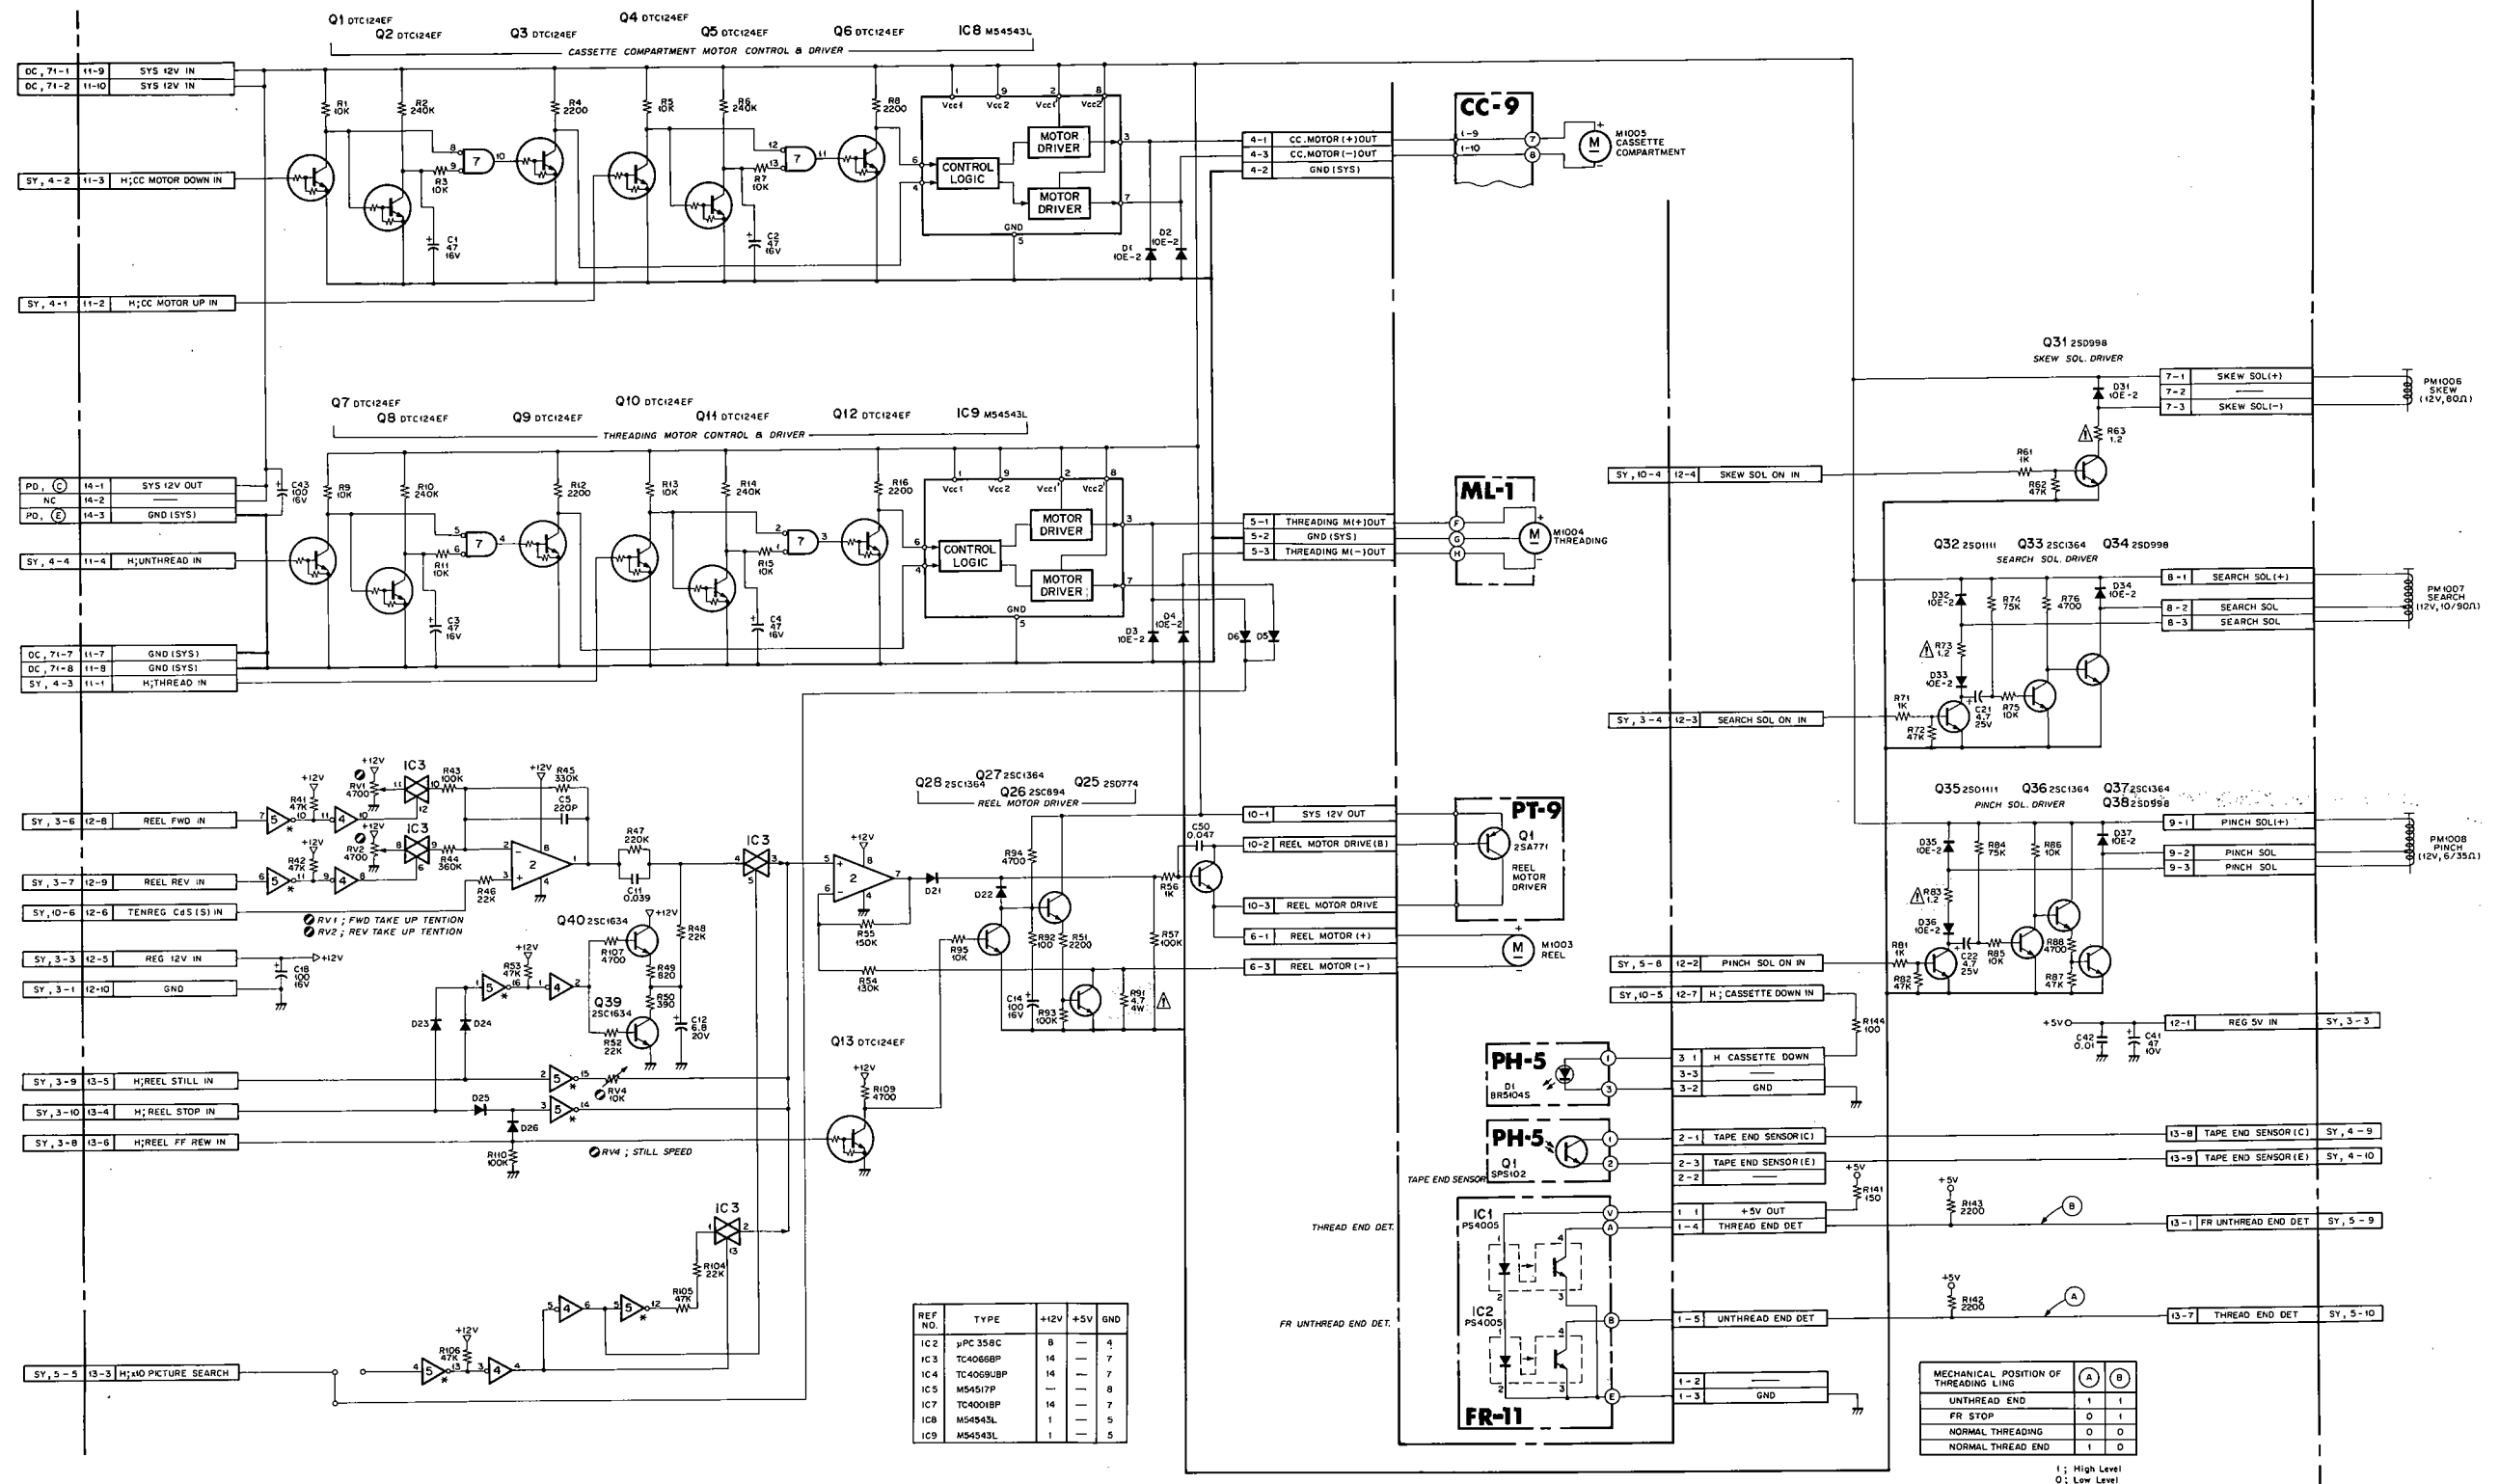

The shaded and -marked components are critical to safety.  
Replace only with same components as specified.

MECHANICAL POSITION OF THREADING LING		(A)	(B)
UNTHREAD END		1	1
FR STOP		0	1
NORMAL THREADING		0	0
NORMAL THREAD END		1	0

1: High Level  
0: Low Level

**MR-11A**


All diodes are 1S1555 unless otherwise noted  
1-611-574-21  
VO-5600  
VO-5630







MR-11A (THREADING/REEL MOTOR DRIVER)

-11  
-9  
-5  
-9


S/N 28151 AND LATER

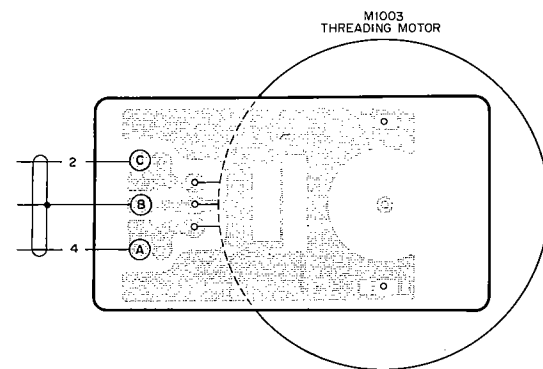

LM-9 - SOLDERING SIDE -



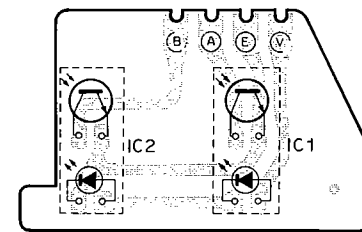



CN1	H - 3	Q1	C - 1
CN2	I - 4	Q2	C - 1
CN3	C - 1	Q3	F - 2
CN4	H - 1	Q4	D - 1
CN5	B - 1	Q5	D - 1
CN6	H - 1	Q6	E - 2
CN7	I - 3	Q7	D - 2
CN8	I - 3	Q8	D - 2
CN9	I - 4	Q9	F - 2
CN10	H - 1	Q10	E - 2
CN11	A - 1	Q11	E - 2
CN12	A - 3	Q12	E - 2
CN13	B - 3	Q13	B - 3
CN14	B - 1	Q25	G - 1
		Q26	G - 1
D1	E - 1	Q27	G - 1
D2	F - 1	Q28	F - 2
D3	E - 1	Q31	H - 2
D4	E - 1	Q32	H - 2
D5	C - 2	Q33	H - 2
D6	C - 2	Q34	H - 2
D21	G - 2	Q35	G - 2
D22	G - 1	Q36	H - 2
D23	A - 3	Q37	H - 2
D24	A - 3	Q38	H - 2
D25	A - 3	Q39	B - 2
D26	A - 3	Q40	B - 2
D31	I - 3		
D32	I - 3	RV1	I - 1
D33	G - 2	RV2	I - 2
D34	I - 3	RV4	I - 3
D35	I - 4		
D36	H - 2		
D37	I - 4		
IC2	C - 3		
IC3	C - 3		
IC4	A - 2		
IC5	A - 2		
IC7	D - 1		
IC8	E - 1		
IC9	E - 2		

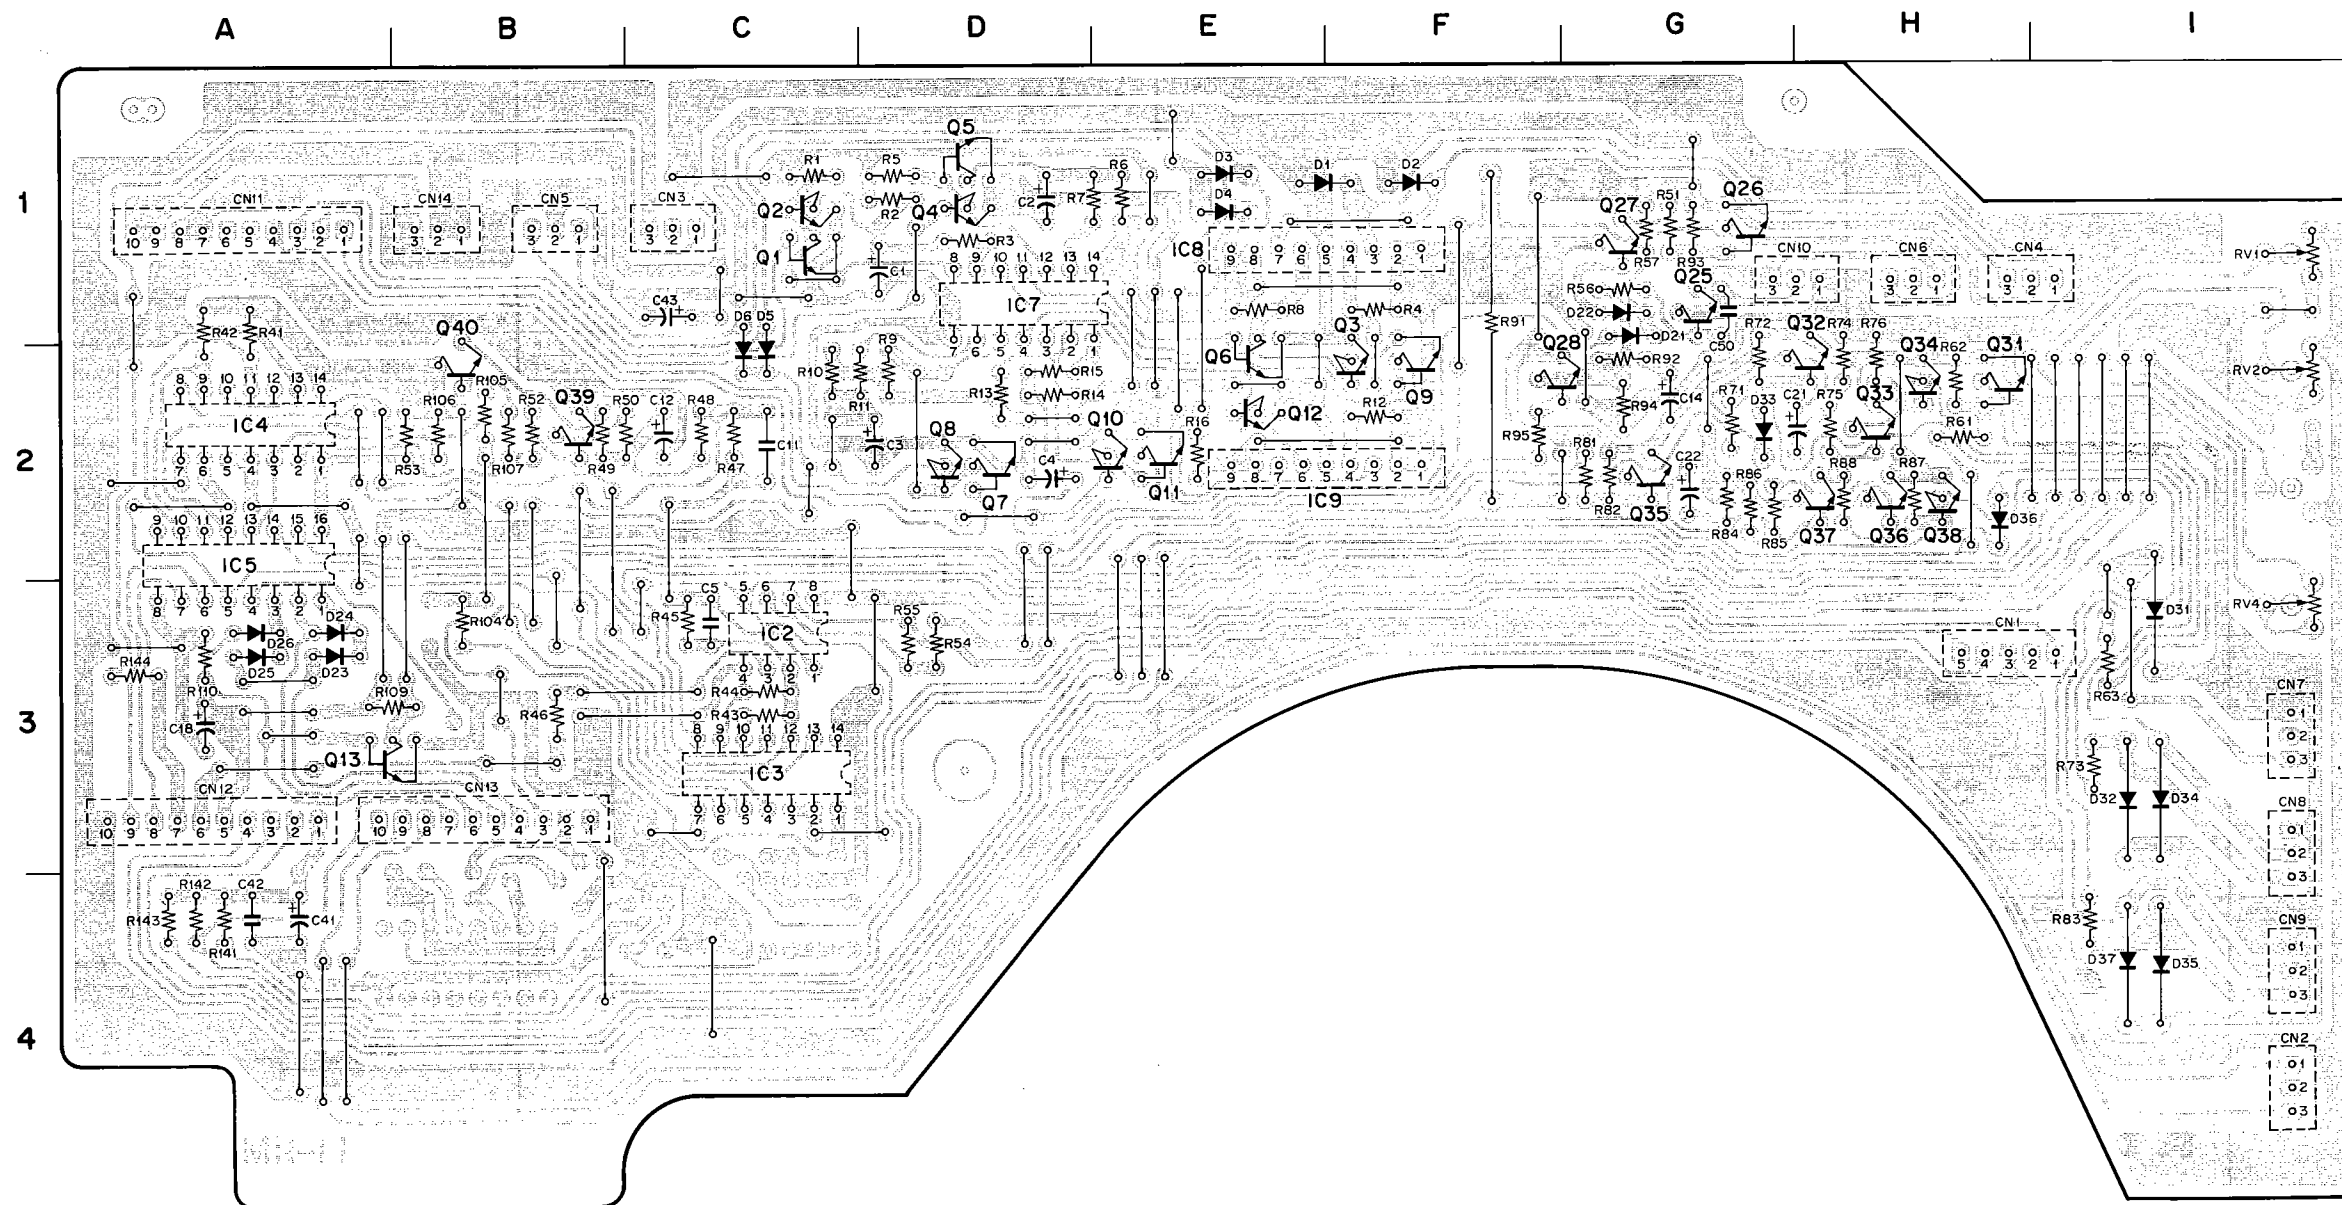

MR-11A - SOLDERING SIDE -  
1-611-574-21  
VO-5600  
VO-5630

21 (FUNCTION KEY)

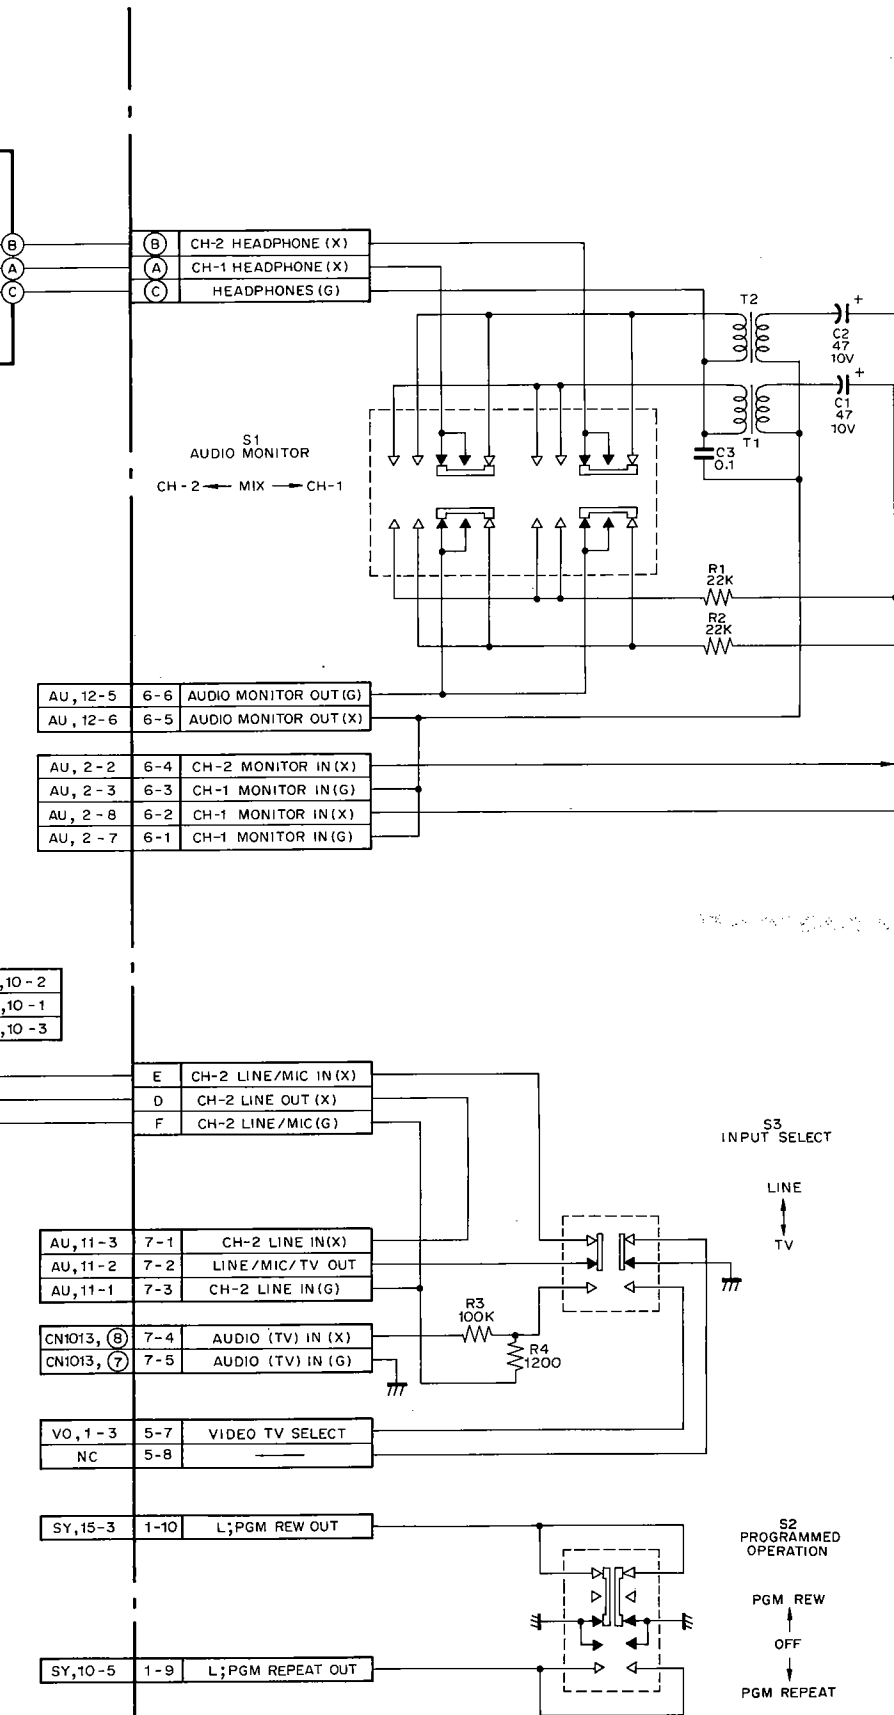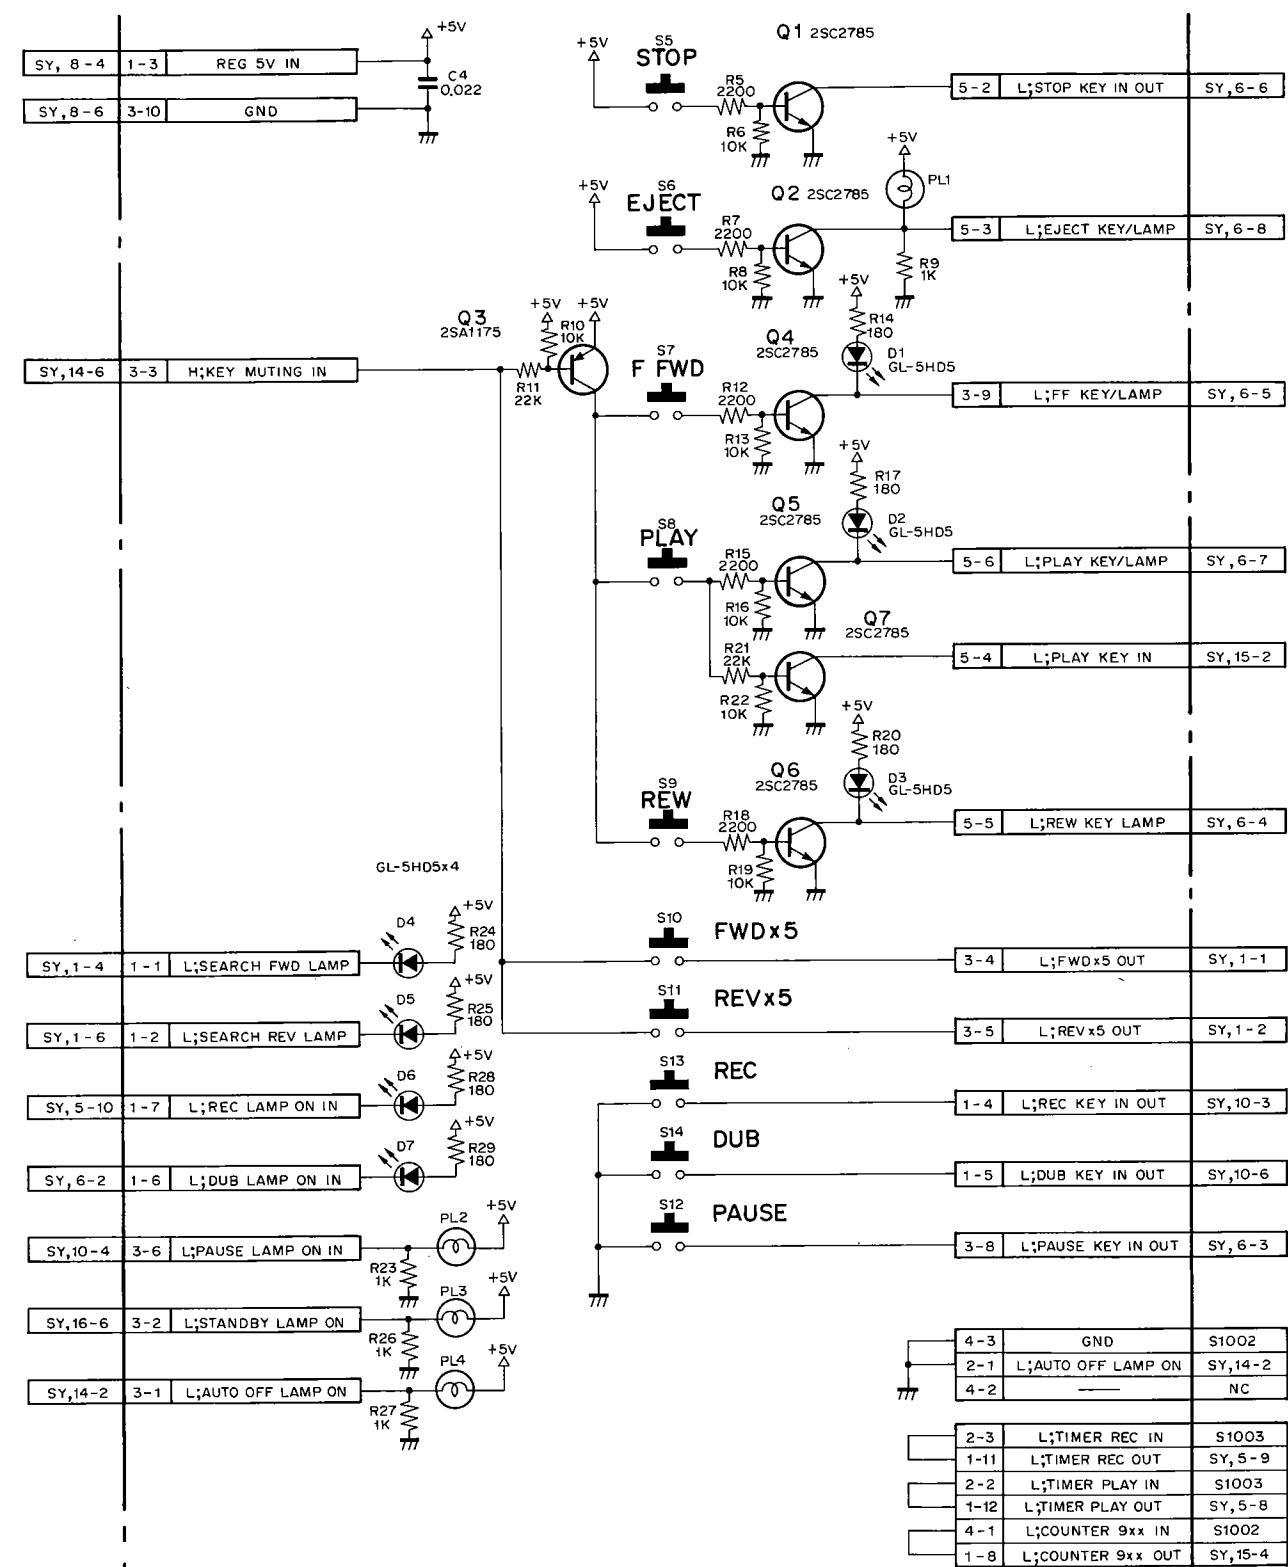


KY-21

KY-21

KY-21


21 (FUNCTION KEY)

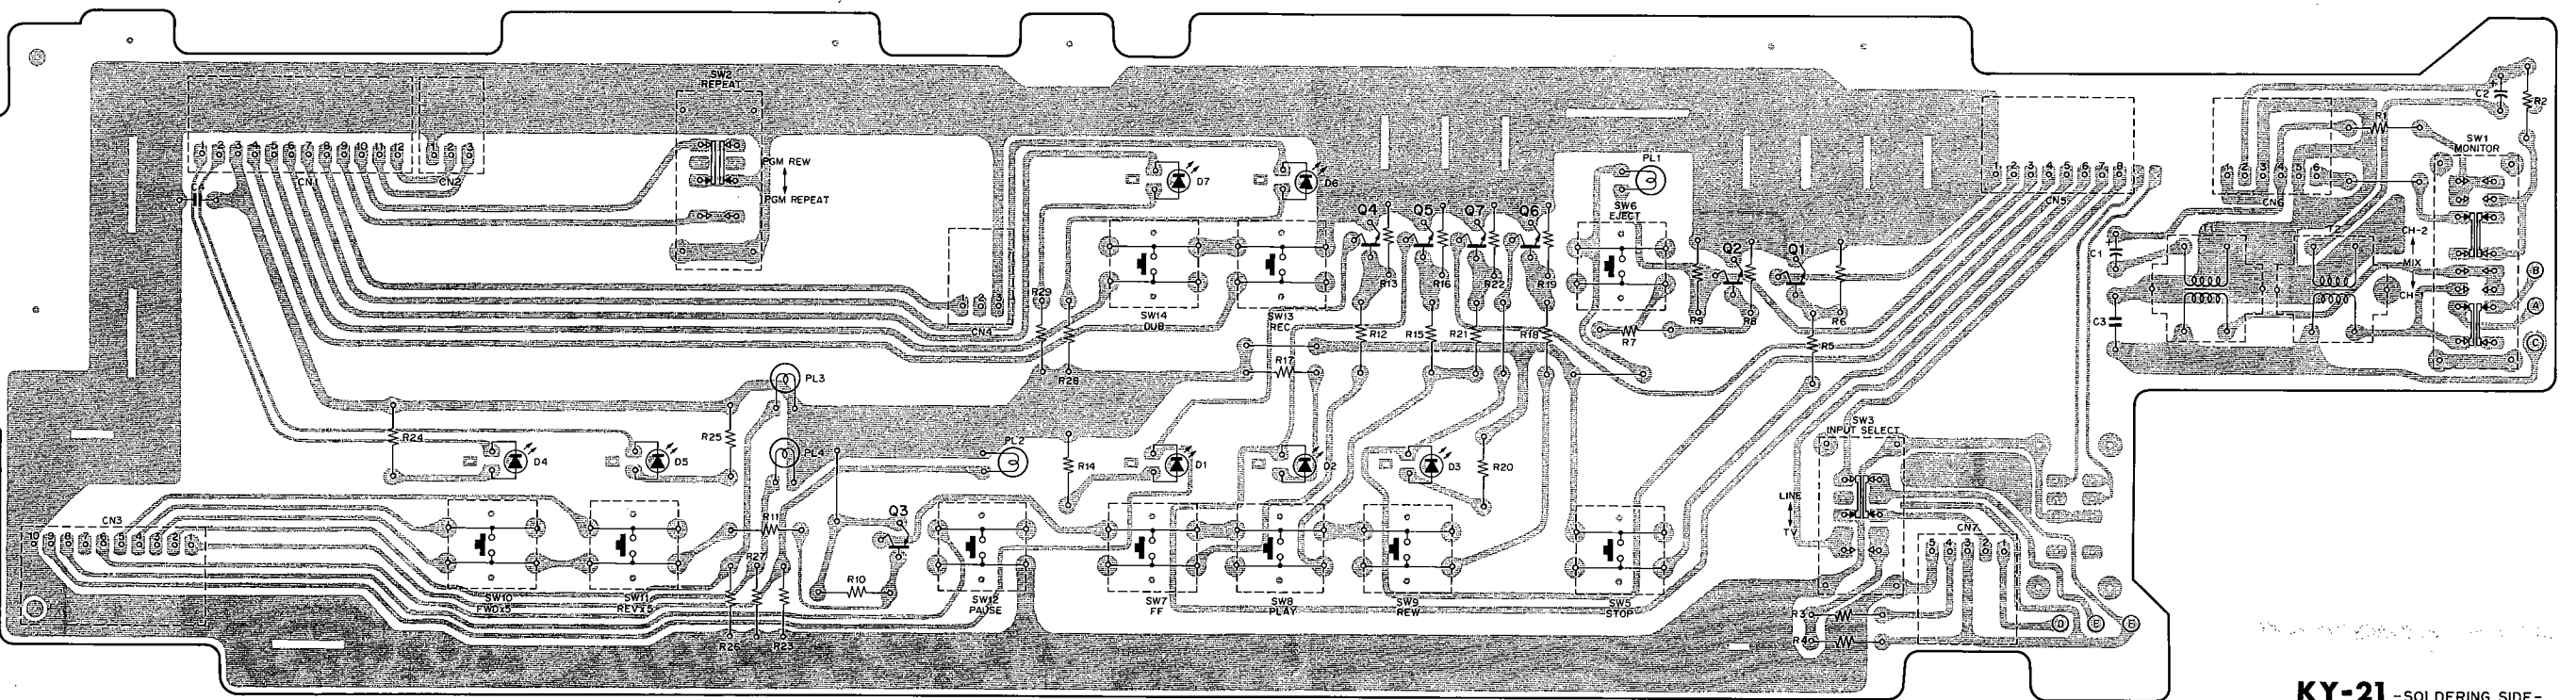

KY-21 - SOLDERING SIDE -



PD-16A (SOLENOID DRIVER/TAPE RUN DET)  
-43  
-4

PC1 MB-1102  
TENREG CdS  
/N UP TO 32250 (U/C)

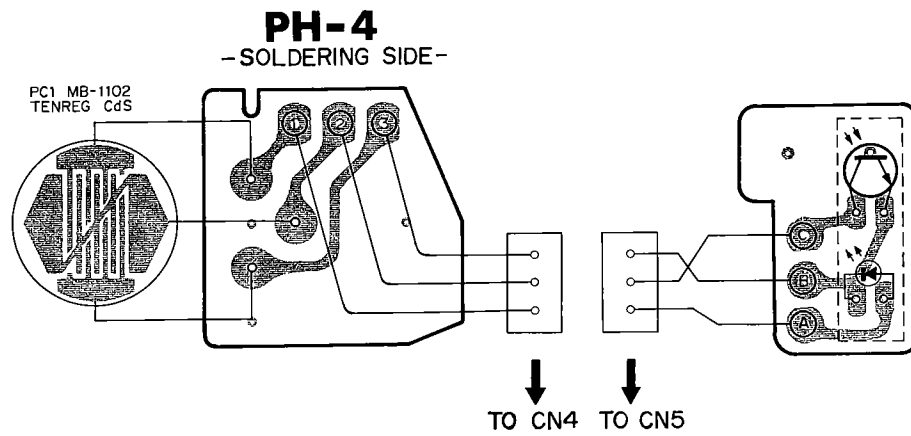

**SW-43**  
-SOLDERING SIDE-

**SW-43**  
-SOLDERING SIDE-

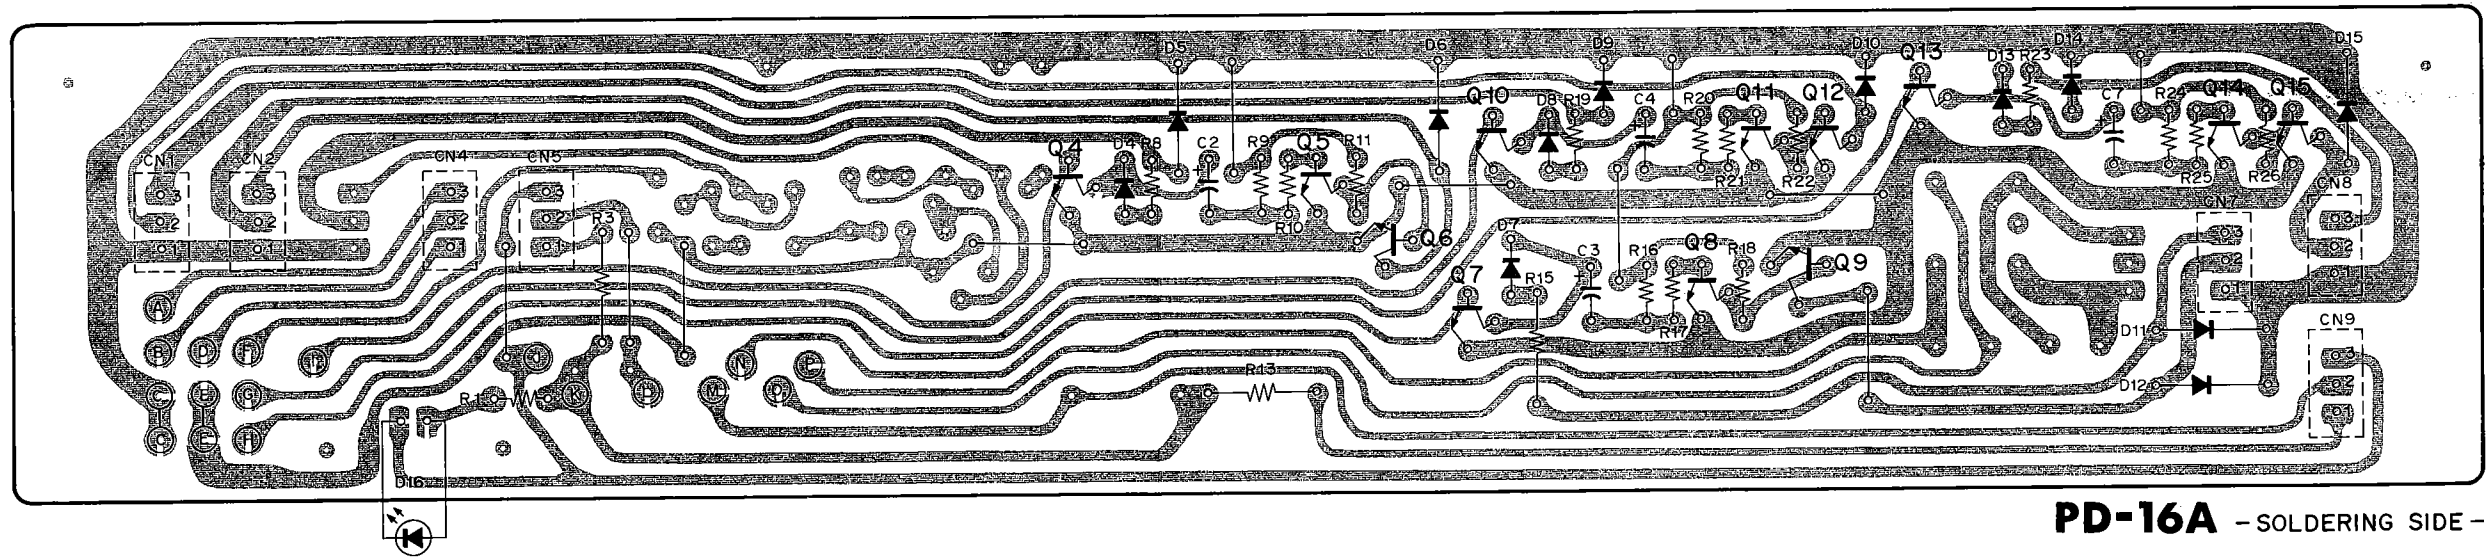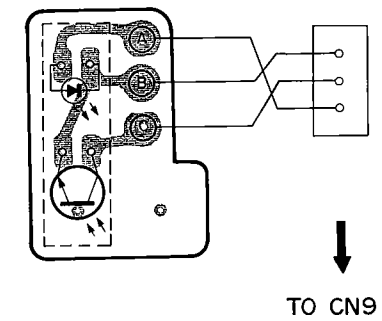

**PD-16A** - SOLDERING SIDE -




PD-16A (SOLENOID DRIVER/TAPE RUN DET)

-43



-4

REVISED BY N 32251 AND LATER (U/C)

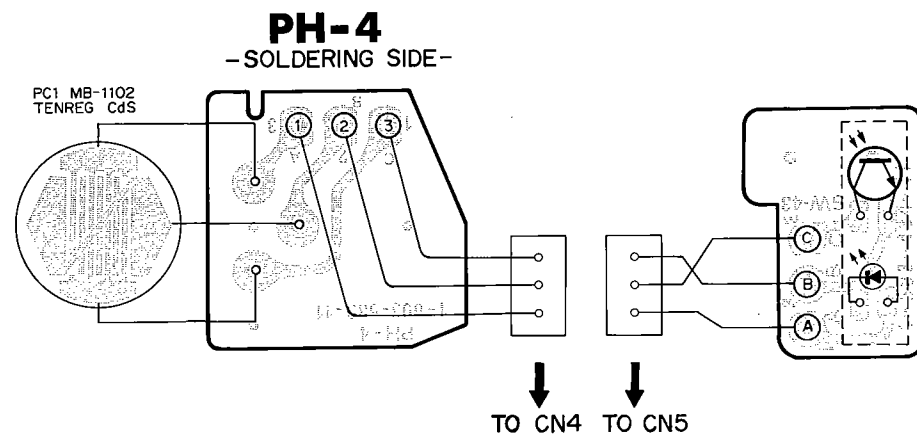

**SW-43**  
-SOLDERING SIDE-

**SW-43**  
-SOLDERING SIDE-

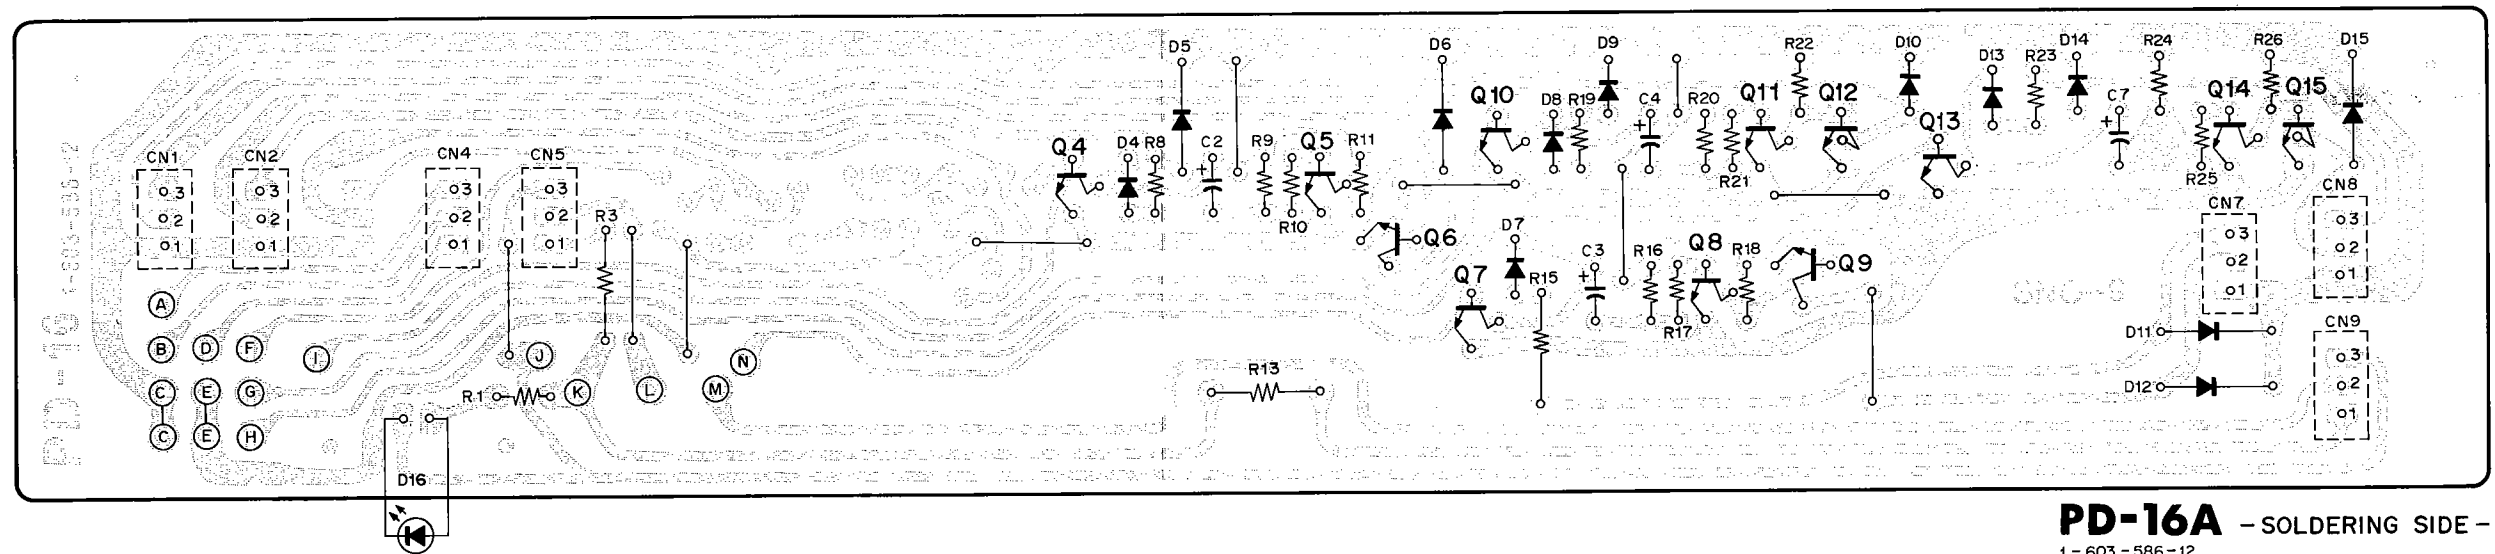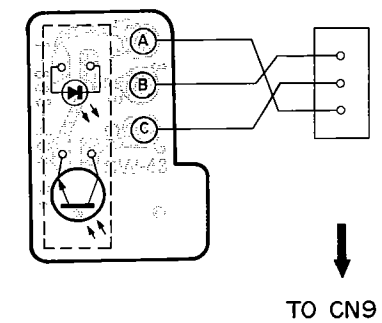


**PD-16A** - SOLDERING SIDE -

1-603-586-12  
VO-5600  
VO-5630  
VP-5000  
VP-5030

# SECTION 15

## SPARE PARTS AND FIXTURE

### 1. PARTS INFORMATION

**Safety Related Component Warning**  
Components identified by shading marked with  on the schematic diagrams, exploded views and electrical spare parts list are critical to safe operation. Replace these components with Sony parts whose parts numbers appear as shown in this manual or in service bulletins and service manual supplements published by Sony.

Replacement Parts supplied from Sony Parts Center will sometimes have different shape and outside view from the parts which are actually in use. This is due to "accommodating the improved parts and/or engineering changes" or "standardization of genuine parts."

This manual's exploded views and electrical spare parts lists are indicating the parts numbers of "the standardized genuine parts at present".

Regarding engineering parts changes in our engineering department, refer Sony service bulletins and service manual supplements.

Printed Components in Bold-Face type on the exploded views and electrical spare parts list are normally stocked for replacement purposes. The remaining parts are not normally required for routine service work. Orders for parts not shown in Bold-face type will be processed, but allow for additional delivery time.

Items with no part number and/or no description are not stocked because they are seldom required for routine service.







(T) after a spring description is shown on the exploded views in order to indicate the number of a spring turn required for the use.

(Example) Spring, tension (24T); This spring must be cut at its 24th turn for actual use.

### 15-2. EXPLODED VIEW





- Exploded views are composed of the following blocks.






- (1) Reel Chassis (1)
  - Supply reel table
  - Supply tension regulator arm
  - Search solenoid
  - Skew solenoid
  - Supply main brake
  - Reel motor
- (2) Reel Chassis (2)
  - Take-up reel table
  - FF/REW idler
  - Take-up main brake
  - Take-up tension regulator arm
  - R brake
  - Still/miss-rec. detector
- (3) Reel Chassis (3)
  - Supply idler solenoid
  - Take-up idler solenoid
  - FF/REW idler pulley
  - Supply brake solenoid
  - Take-up brake solenoid
  - 10 times picture search solenoid
- (4) Threading
  - Threading ring
  - Gear box
  - T correction guide
  - Tape beginning sensor
  - FR detector
- (5) Threading Arm
  - T drawer arm
  - S drawer arm
  - Drawer lever
- (6) Drum/Capstan
  - Head drum
  - Capstan motor
  - Audio/CTL head
  - Brush
- (7) Erase Head Base
  - Erase head base
  - S guard
- (8) Pinch Lever
  - Pinch lever
  - Pinch roller pre-set cam
  - Pinch solenoid
- (9) Cassette-up Compartment
- (10) Function Control
  - Function control panel (except ornamental panel)
- (11) Chassis (1)
  - Chassis (bottom view)
- (12) Chassis (2)
  - Chassis (rear view)
- (13) Meter Panel
- (14) Chassis (3)
  - Chassis (top view)
- (15) Printed Circuit Board
  - Printed circuit board (except bottom block)
- (16) Ornamental Panel (1)
  - Ornamental panel (except control panel)
- (17) Ornamental Panel (2)
  - Control panel
- (18) Switching Regulator (UR-01)


	PS	PSW	B (BZn N)	B (Cr-N)	PTT	PTTWH
						
2.6 x 4	7-621-972-05	—	7-621-912-10	7-621-912-18	—	—
2.6 x 6	7-621-972-25	7-621-981-15	7-621-912-30	7-621-912-38	—	—
2.6 x 8	7-621-972-35	7-621-981-25	7-621-912-40	7-621-912-48	—	—
3 x 5	7-686-446-01	—	—	—	—	—
3 x 6	7-686-447-01	7-686-527-01	7-686-624-09	7-686-624-04	7-687-411-31	7-687-510-31
3 x 8	7-686-448-01	7-686-528-01	7-686-625-09	7-686-625-04	7-687-412-31	7-687-511-31
3 x 10	7-686-449-01	7-686-529-01	7-686-626-09	7-686-626-04	7-687-413-31	7-687-512-31
3 x 12	7-686-450-01	7-686-530-01	7-686-627-09	7-686-627-04	7-687-414-31	7-687-513-31
3 x 16	7-686-452-01	7-686-532-01	7-686-629-09	7-686-629-04	—	—
3 x 20	7-686-453-01	7-686-533-01	7-686-630-09	7-686-630-04	—	—
3 x 25	7-686-454-01	7-686-534-01	7-686-631-09	7-686-631-04	—	—
4 x 8	7-686-468-01	7-686-548-01	7-686-635-09	7-686-635-04	—	—
4 x 12	7-686-470-01	7-686-550-01	7-686-637-09	7-686-637-04	—	—
4 x 14	7-686-471-01	—	7-686-638-09	7-686-638-04	—	—
4 x 16	7-686-472-01	—	7-686-639-09	7-686-639-04	—	—
4 x 20	7-686-473-01	—	7-686-640-09	7-686-640-04	—	—

SCREW

WASHER

	HEXAGON SOCKET SCREW 	HEXAGON SET SCREW 	(—) SET SCREW FLAT POINT 	(—) SET SCREW CONE POINT 
2.6 x 3	_____	7-621-734-09	_____	_____
2.6 x 4	7-621-996-24	7-621-735-09	_____	_____
2.6 x 5	_____	7-621-736-09	_____	_____
2.6 x 6	7-683-412-05	_____	_____	7-621-712-55
2.6 x8	7-683-413-05	_____	_____	7-621-712-65
2.6 x 10	_____	_____	_____	7-621-712-75
3 x 4	_____	7-683-238-01	_____	_____
3 x 5	_____	_____	7-683-175-01	_____
3 x 6	7-683-403-04	_____	7-683-176-01	7-683-176-21
3 x 8	7-683-404-04	_____	_____	7-683-177-21
3 x 10	7-683-405-04	_____	_____	7-683-178-21
3 x 12	_____	_____	_____	7-683-179-21


	FLAT WASHER SMALL W. 	FLAT WASHER MIDDLE W. 	SPRING WASHER SW. 	TOOTHED WASHER TYPE B LW. 	HEXAGON NUT N. 
2.6 mm	7-688-002-01	7-688-002-12	7-623-207-22	7-623-421-07	7-622-207-05
3 mm	7-688-003-01	7-688-003-12	7-688-003-11	7-623-422-07	7-684-023-04
4 mm	7-688-004-01	7-688-004-12	7-623-210-22	7-623-423-07	7-684-024-04
5 mm	7-688-005-01	7-688-005-01	7-623-212-22	_____	7-684-025-04

	STOP RING E TYPE E. 
2	7-624-104-04
2.3	7-624-105-04
3	7-624-106-04
4	7-624-108-04
5	7-624-109-04
6	7-624-110-04




# REEL CHASSIS (1) REEL CHASSIS (1)

ply Side Reel Chassis

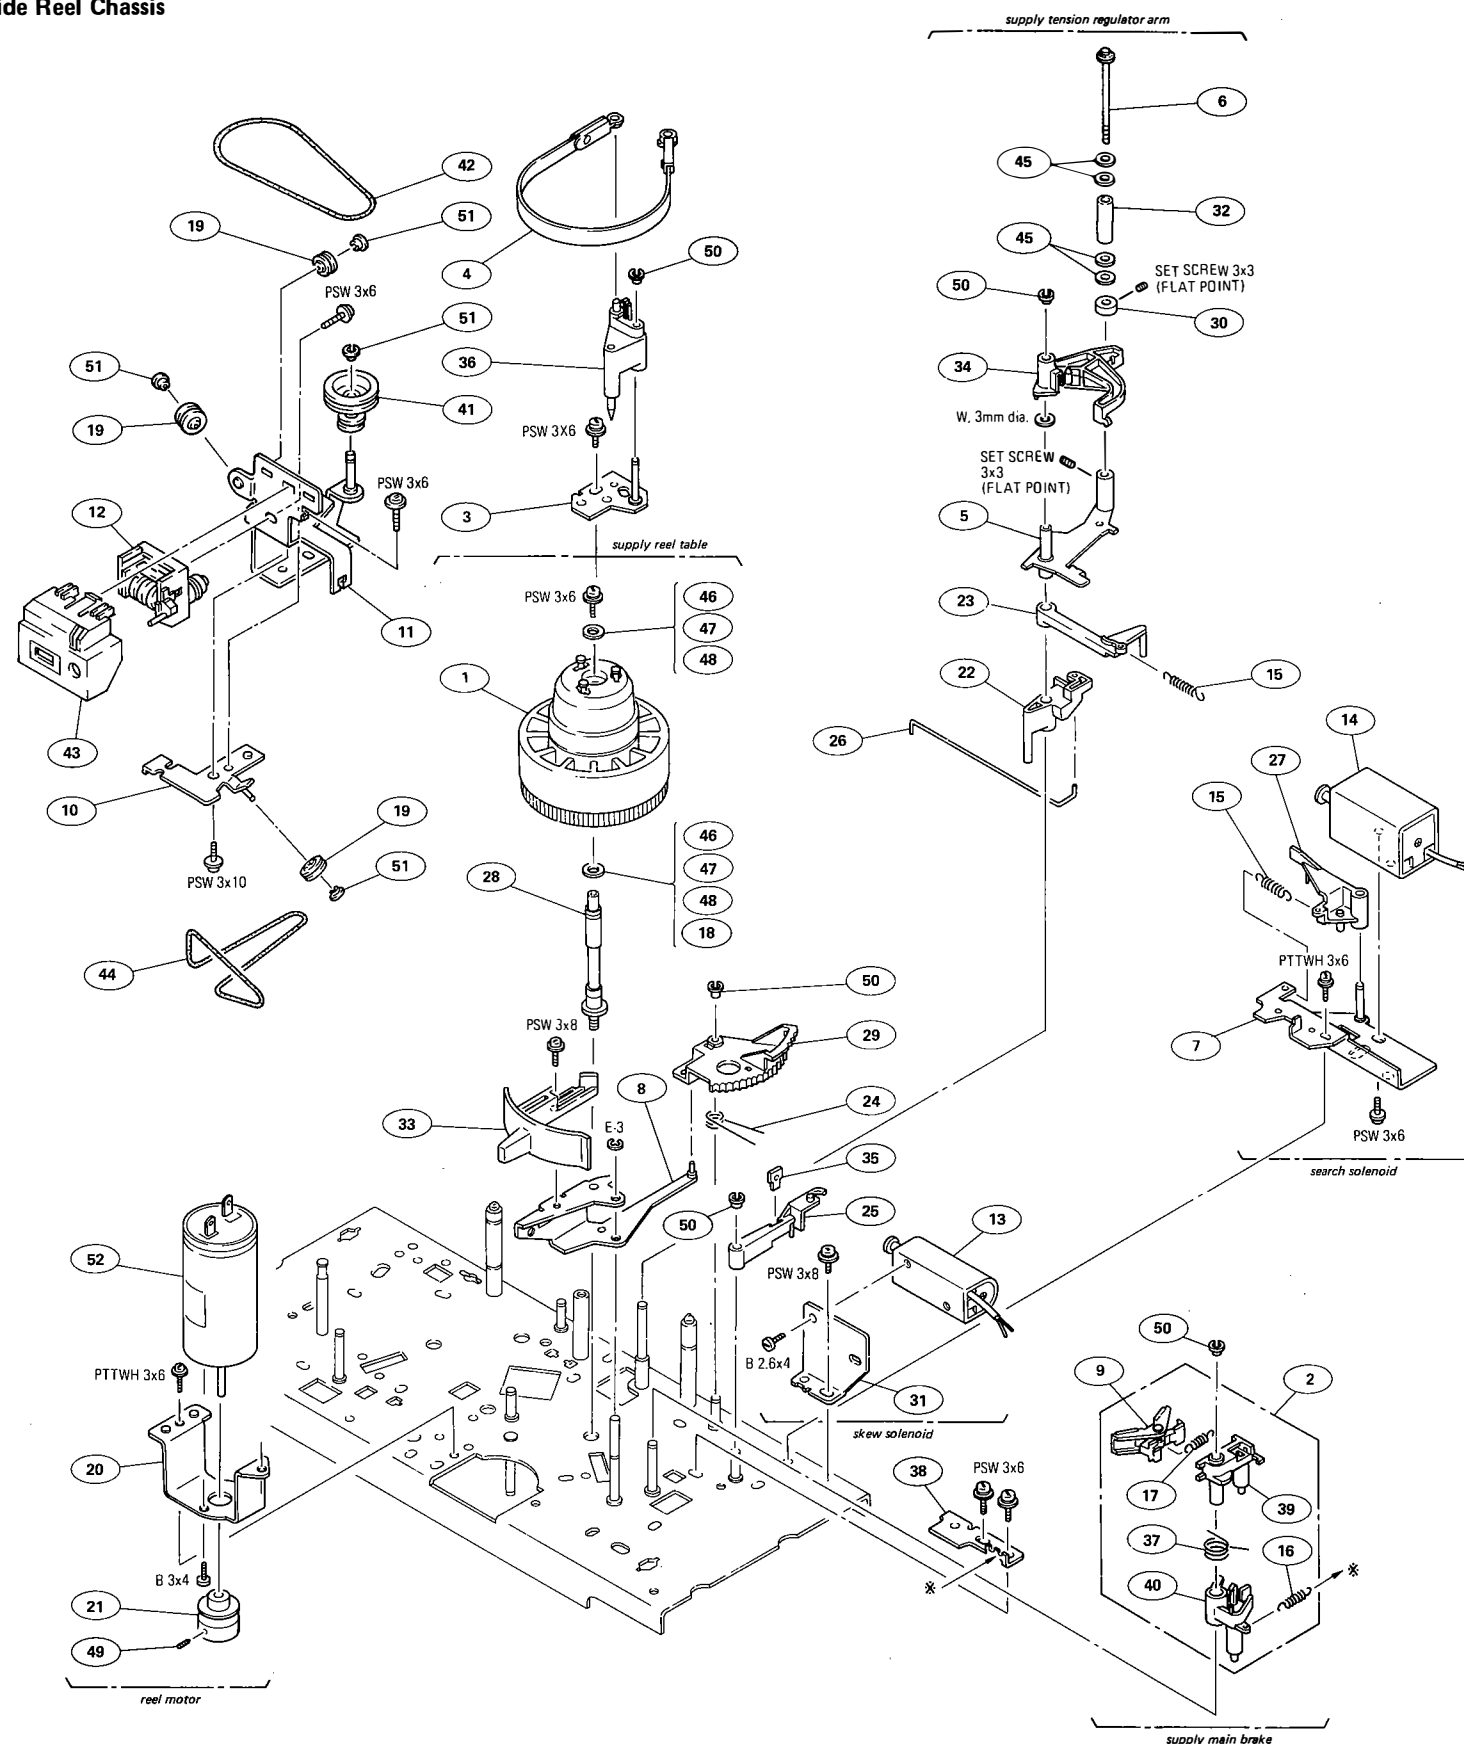


No.	Parts No.	Description
1	A-6739-017-B	TABLE (T) ASS'Y, REEL
2	A-6741-038-B	BRAKE ASS'Y, MAIN
3	X-3668-706-0	BASE ASS'Y, S TENSION REGULATOR
4	X-3668-707-0	BAND ASS'Y, S TENSION REGULATOR
5	X-3668-708-0	ARM (A) ASS'Y, S TENSION REGULATOR
6	X-3668-709-0	SHAFT (1) ASS'Y, ROLLER
7	X-3668-717-0	BASE ASS'Y, SEARCH
8	X-3668-725-0	ARM (C) ASS'Y, SKEW
9	X-3668-749-0	HOLDER ASS'Y, LINING
10	X-3672-603-0	BRACKET ASS'Y, PULLEY
11	X-3672-604-0	BRACKET ASS'Y, COUNTER
12	Y-2041-071-5	COUNTER
13	1-454-283-00	SOLENOID
14	1-454-284-00	SOLENOID
15	3-534-238-XX	SPRING TENSION (23T)
16	3-535-369-XX	SPRING, TENSION (12T)
17	3-548-124-00	SPRING, TENSION
18	3-645-567-11	SPACER, FLANGE
19	3-660-811-00	ROLLER, GUIDE
20	3-668-783-00	BRACKET, MOTOR
21	3-668-784-00	PULLEY, MOTOR
22	3-668-787-02	ARM, S DETECTION
23	3-668-794-00	ARM (A), SKEW
24	3-668-795-00	SPRING
25	3-668-797-00	ARM, SKEW LOCK
26	3-668-804-00	LINK, DETECTION, TENSION
27	3-668-808-00	ARM, FWD, SEARCH
28	3-668-827-00	SHAFT (S), REEL
29	3-668-835-00	ARM (B), SKEW
30	3-668-874-00	FLANGE (1), LOWER
31	3-668-875-00	BRACKET
32	3-668-916-02	ROLLER (1), GUIDE
33	3-668-920-00	LEVER, SKEW
34	3-668-936-00	ARM (B), S TENSION REGULATOR
35	3-668-937-00	CLAW, SKEW LOCK
36	3-668-939-00	ARM, BAND LOCK
37	3-668-966-00	SPRING
38	3-668-967-00	STOPPER, BRAKE
39	3-668-970-00	ARM, BRAKE
40	3-668-971-00	ARM, BRAKE RELEASE
41	3-672-601-00	PULLEY, MIDWAY, COUNTER
42	3-672-602-00	BELT (A), COUNTER
43	3-672-619-00	COVER, COUNTER
44	3-672-626-00	BELT (B), COUNTER
45	3-701-438-01	WASHER, POLY 2.5MM DIA., 0.13T
46	3-701-444-01	WASHER, POLY 6MM DIA., 0.13T
47	3-701-444-11	WASHER, POLY 6MM DIA., 0.25T
48	3-701-444-21	WASHER, POLY 6MM DIA., 0.5T
49	3-701-506-01	SET SCREW, DOUBLE POINT 3X4
50	3-703-074-00	CAP 3, SHAFT
51	3-703-075-00	CAP 2, SHAFT
52	8-835-047-01	MOTOR, DC (MNR-4000A)

## NOTE:

- The shaded and  -marked components are critical to safety. Replace only with same components as specified.
- Parts printed in Bold-Face type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.


# REEL CHASSIS (2) REEL CHASSIS (2)

## Take-up Side Reel Chassis

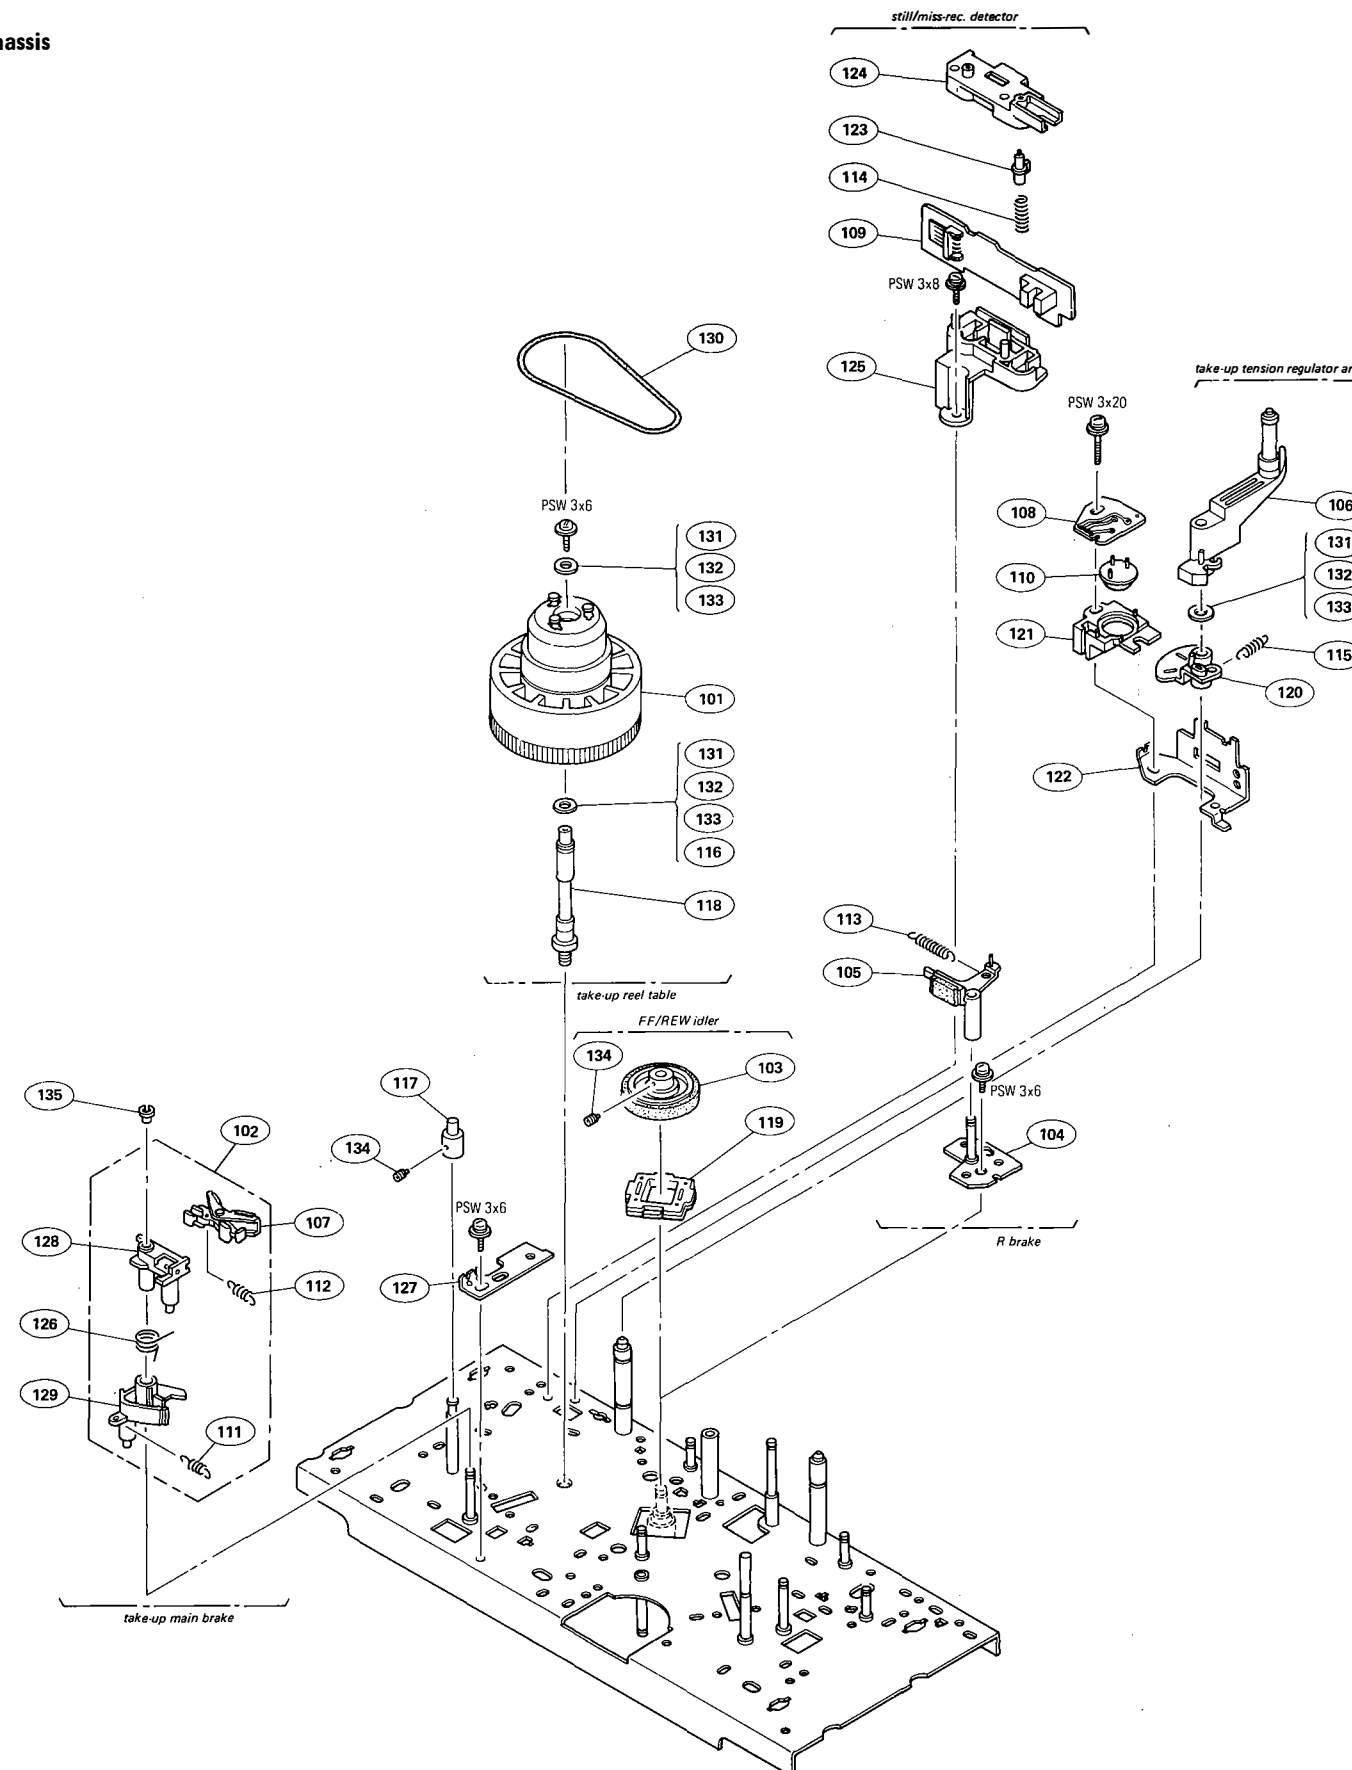


No.	Parts No.	Description
101	<b>A-6739-017-B</b>	<b>TABLE (T) ASS'Y, REEL</b>
102	<b>A-6741-038-B</b>	<b>BRAKE ASS'Y, MAIN</b>
103	<b>X-3646-026-0</b>	<b>IDLER ASS'Y, FF</b>
104	X-3668-705-0	BASE ASS'Y, R BRAKE
105	<b>X-3668-737-0</b>	<b>BRAKE ASS'Y, R</b>
106	<b>X-3668-738-0</b>	<b>ARM ASS'Y, T TENSION REGULATOR</b>
107	<b>X-3668-749-2</b>	<b>HOLDER ASS'Y, LINING</b>
108	1-603-589-00	PRINTED CIRCUIT BOARD, PH-4
109	1-603-590-00	PRINTED CIRCUIT BOARD, SW-46
110	<b>1-806-232-11</b>	<b>DETECTOR MB-1102/S.N.</b>
111	<b>3-535-369-XX</b>	<b>SPRING, TENSION (12T)</b>
112	<b>3-548-124-00</b>	<b>SPRING, TENSION</b>
113	<b>3-549-861-00</b>	<b>SPRING, TENSION</b>
114	<b>3-642-126-00</b>	<b>SPRING, COMPRESSION</b>
115	<b>3-642-427-00</b>	<b>SPRING, TENSION</b>
116	<b>3-645-567-11</b>	<b>SPACER, FLANGE</b>
117	3-668-031-00	RETAINER (UPPER), CASSETTE
118	3-668-766-00	SHAFT (T), REEL
119	3-668-780-00	CUSHION, IDLER
120	<b>3-668-788-00</b>	<b>ARM, T DETECTION</b>
121	3-668-789-00	HOLDER, BRIDGE, PHOTO
122	3-668-798-00	STOPPER, T TENSION REGULATOR
123	<b>3-668-929-00</b>	<b>ACTUATOR, SR</b>
124	3-668-931-00	HOLDER (UPPER), SR
125	3-668-932-00	HOLDER (LOWER), SR
126	<b>3-668-966-00</b>	<b>SPRING</b>
127	3-668-967-00	STOPPER, BRAKE
128	3-668-970-00	ARM, BRAKE
129	3-668-971-00	ARM, BRAKE RELEASE
130	<b>3-672-602-00</b>	<b>BELT (A), COUNTER</b>
131	<b>3-701-444-01</b>	<b>WASHER, POLY 6MM DIA., 0.13T</b>
132	<b>3-701-444-11</b>	<b>WASHER, POLY 6MM DIA., 0.25T</b>
133	<b>3-701-444-21</b>	<b>WASHER, POLY 6MM DIA., 0.5T</b>
134	<b>3-701-506-01</b>	<b>SET SCREW, DOUBLE POINT 3X4</b>
135	<b>3-703-074-00</b>	<b>CAP 3, SHAFT</b>


### NOTE:

- The shaded and  -marked components are critical to safety. Replace only with same components as specified.
- Parts printed in Bold-Face type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.


# REEL CHASSIS (3) REEL CHASSIS (3)

I Chassis (bottom view)

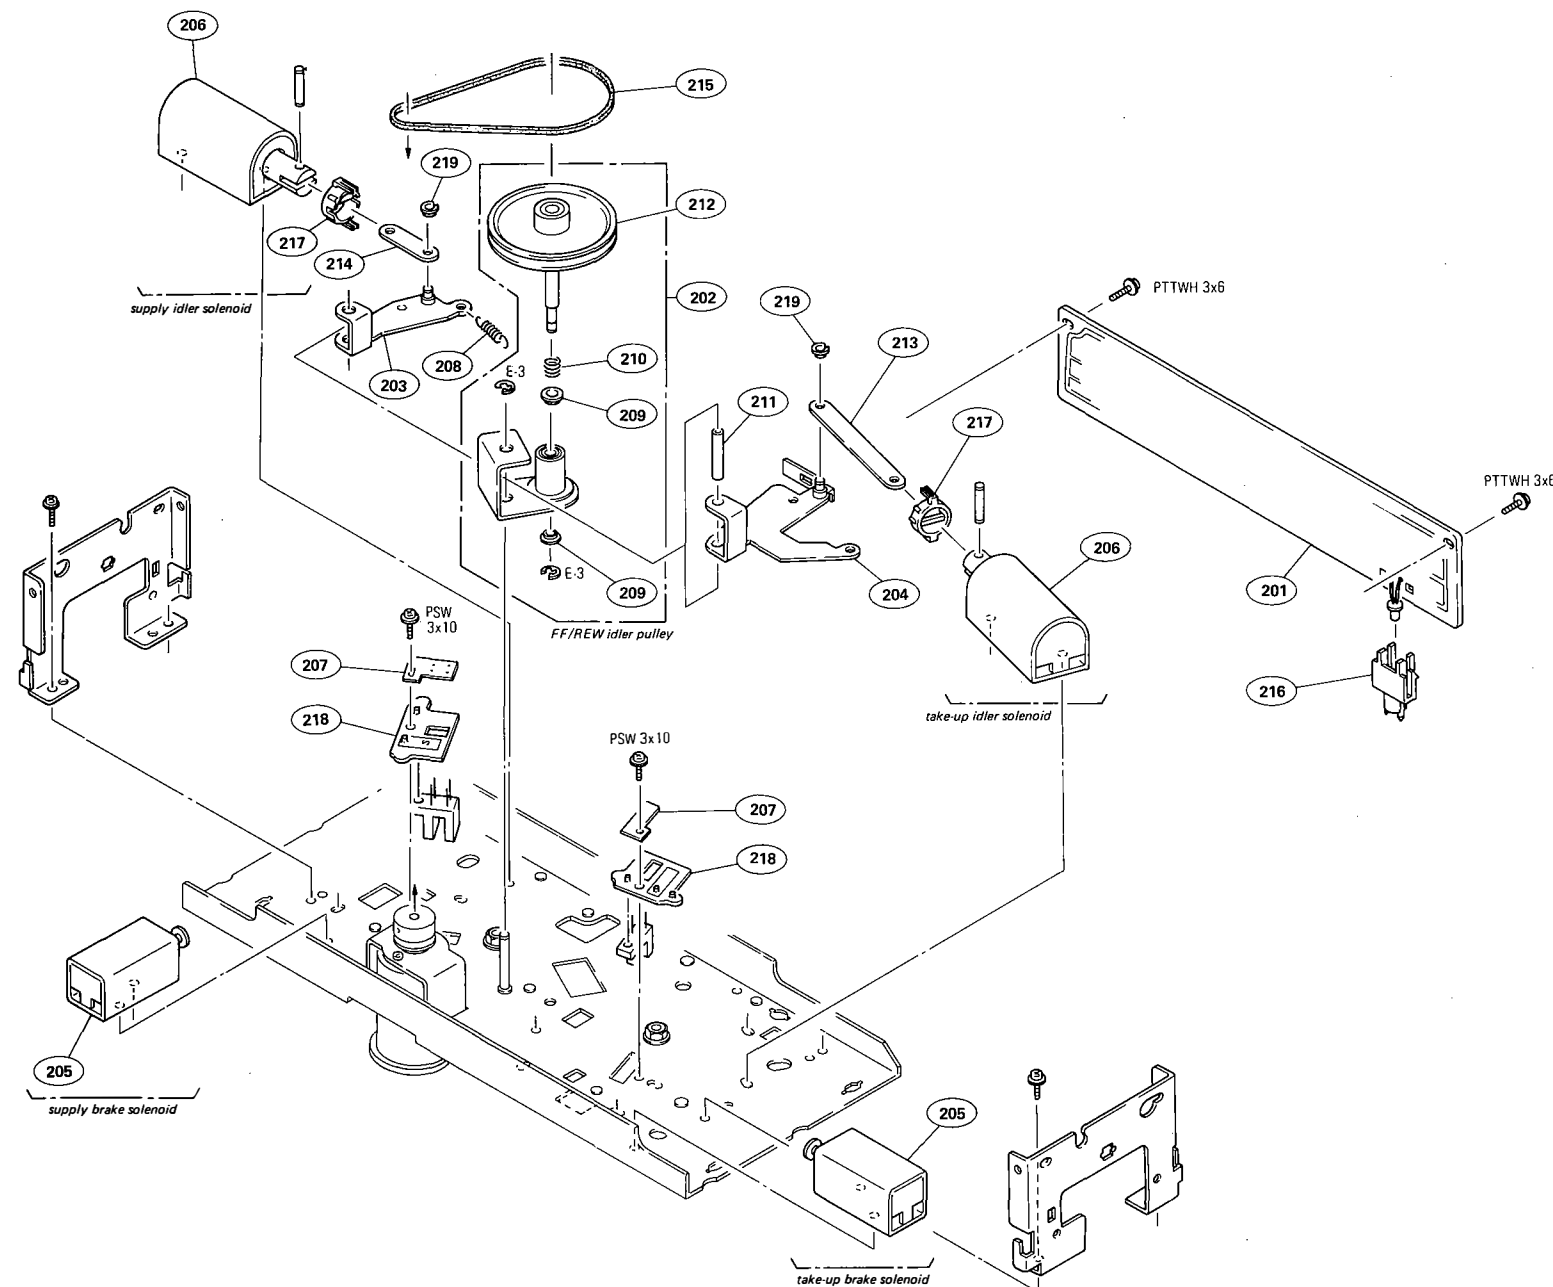


No.	Parts No.	Description
 201	A-6717-250-A	MOUNTED CIRCUIT BOARD, PD-16A
202	<b>A-6740-069-A</b>	<b>PULLEY BLOCK ASS'Y, IDLER</b>
203	X-3668-703-0	LEVER ASS'Y, S
204	X-3668-704-0	LEVER ASS'Y, T
205	<b>1-454-284-00</b>	<b>SOLENOID</b>
206	<b>1-454-285-00</b>	<b>SOLENOID</b>
207	1-603-434-00	PRINTED CIRCUIT BOARD, SW-43
208	<b>3-437-452-00</b>	<b>SPRING, TENSION</b>
209	<b>3-650-512-00</b>	<b>COLLAR, (A)</b>
210	<b>3-651-572-00</b>	<b>SPRING, COMPRESSION</b>
211	3-668-048-11	SPACER, (DIA. 4X20)
212	<b>3-668-772-00</b>	<b>SHAFT, IDLER PULLEY</b>
213	3-668-781-00	JOINT, T
214	3-668-782-00	JOINT, S
215	<b>3-668-785-00</b>	<b>BOLT (67X2)</b>
216	3-668-786-00	HOLDER, LED
217	<b>3-668-826-00</b>	<b>RETAINER, PIN, SOLENOID</b>
218	3-668-828-00	BRACKET, PS
219	<b>3-703-074-00</b>	<b>CAP 3, SHAFT</b>

## NOTE:

- The shaded and  -marked components are critical to safety. Replace only with same components as specified.
- Parts printed in **Bold-Face** type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face** type will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.

# THREADING

## Threading Block


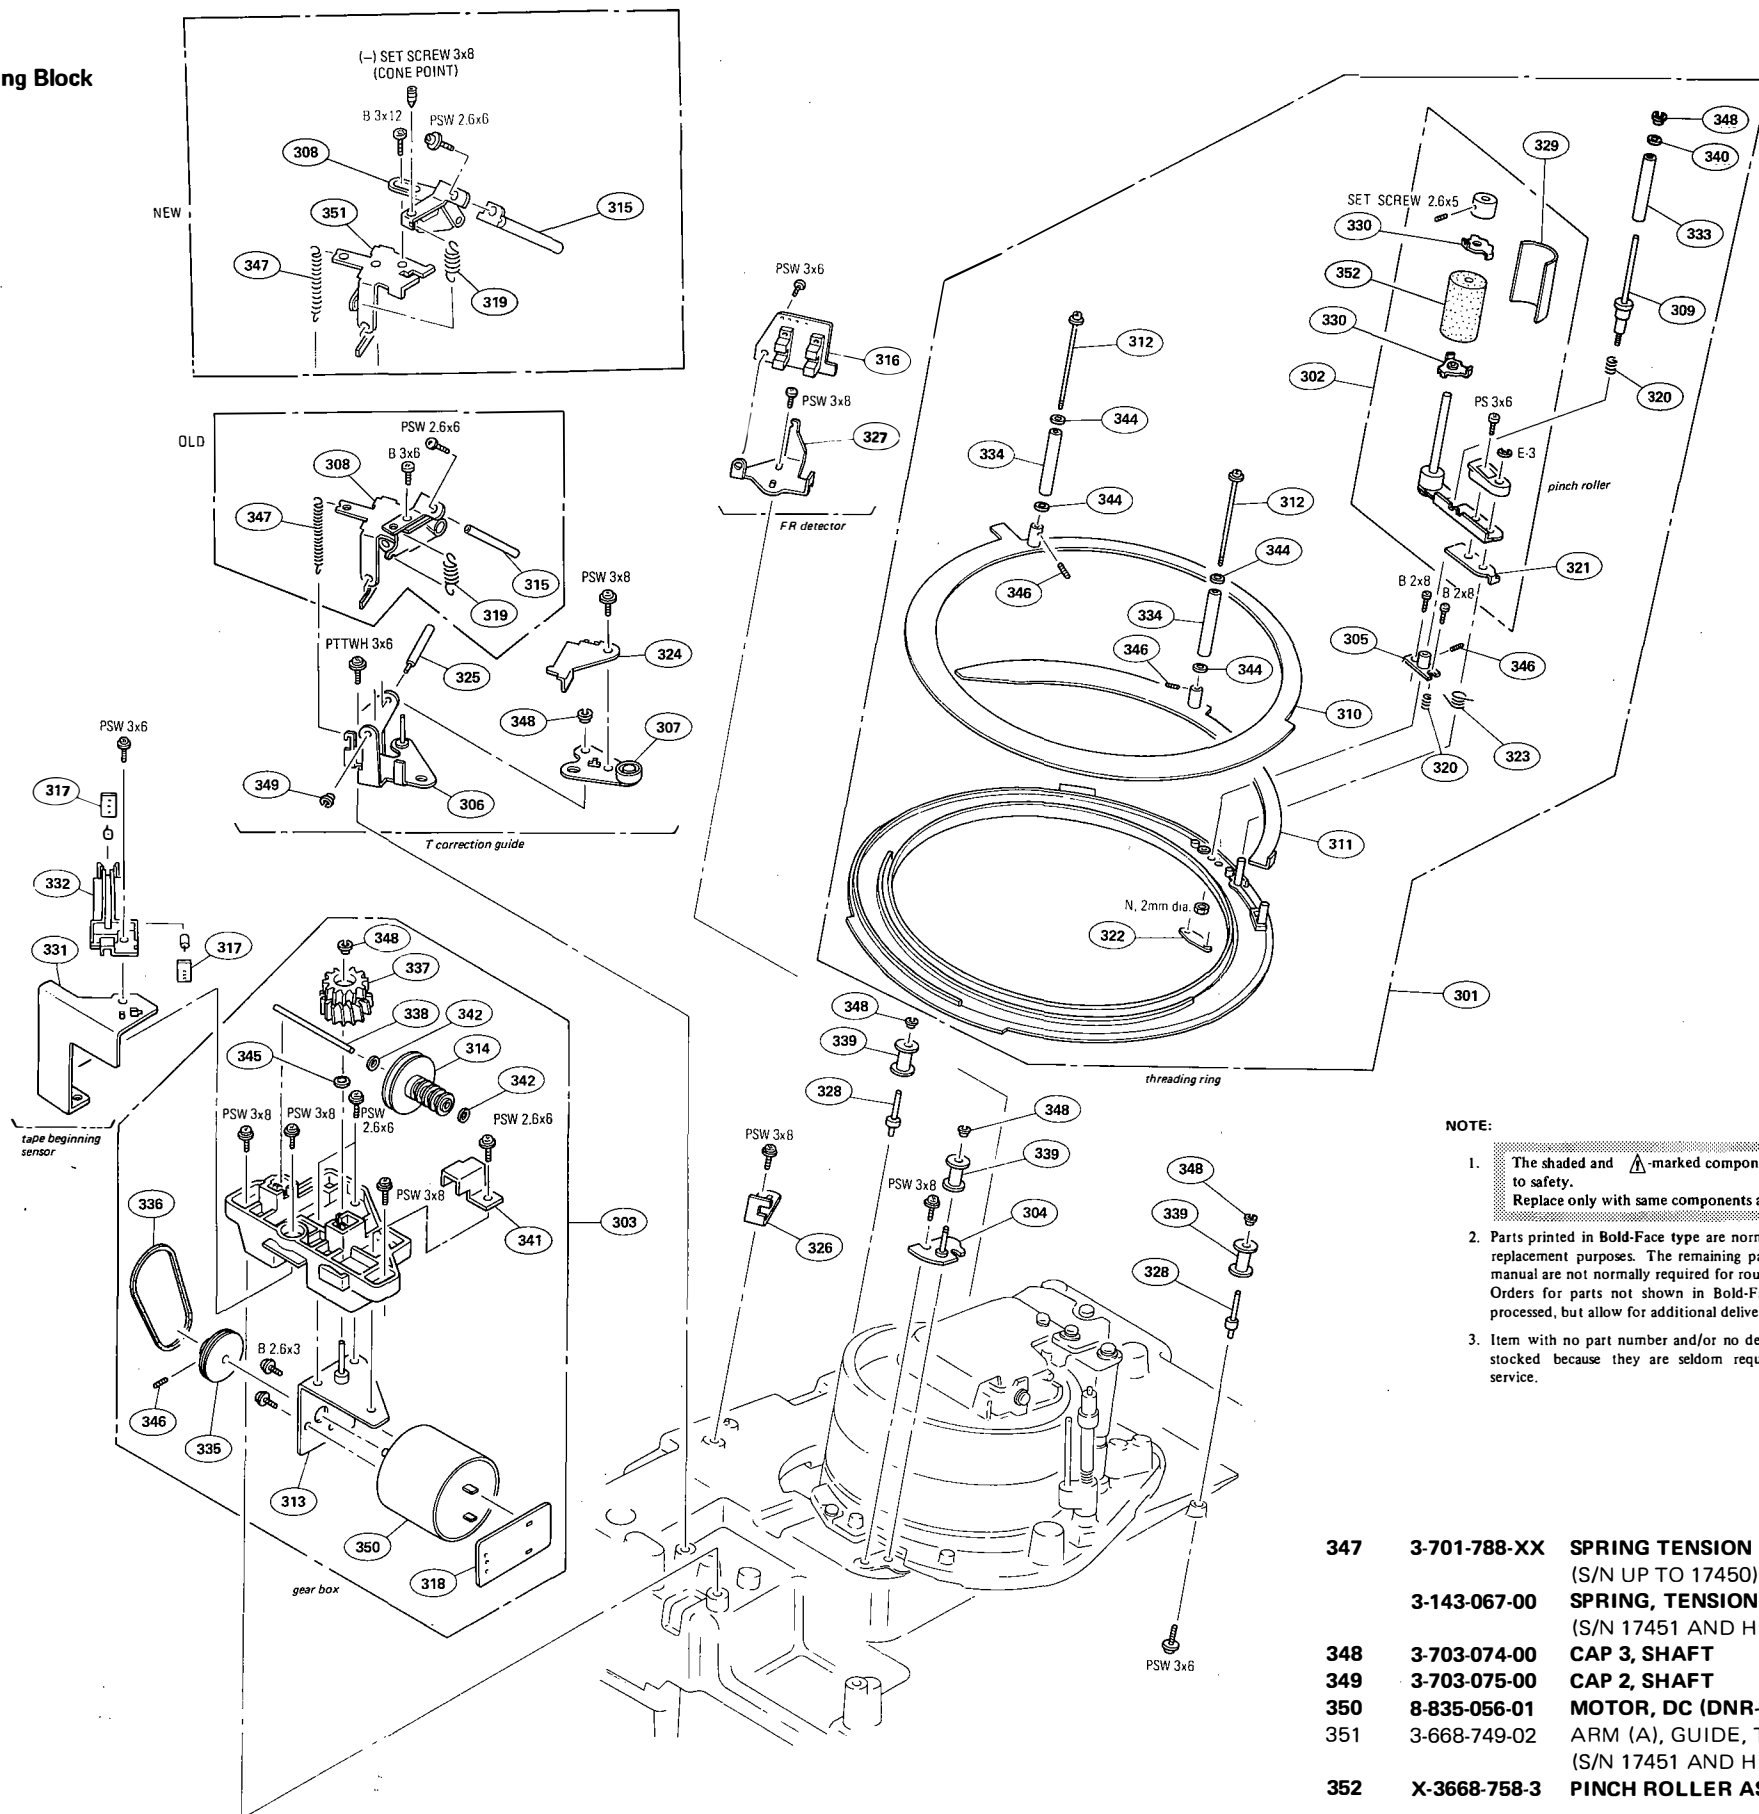


No.	Parts No.	Description
301	A-6750-192-A	RING BLOCK ASS'Y, MAIN
<b>302</b>	<b>A-6750-125-D</b>	<b>PINCH ROLLER BLOCK ASS'Y</b>
303	A-6750-134-B	BOX BLOCK ASS'Y, GEAR
304	X-3668-719-B	ROLLER ASS'Y, RING
305	X-3668-720-0	BASE ASS'Y, ROLLER, PRECEDING
306	X-3668-721-0	CHASSIS ASS'Y, GUIDE
<b>307</b>	<b>X-3668-722-0</b>	<b>LOCKER ASS'Y, FR</b>
308	X-3668-723-0	ARM ASS'Y, GUIDE, T CORRECTION (S/N UP TO 17450)
	X-3668-723-2	ARM ASS'Y, GUIDE, T CORRECTION (S/N 17451 AND HIGHER)
<b>309</b>	<b>X-3668-724-3</b>	<b>SHAFT ASS'Y, ROLLER, PRECEDING</b>
310	X-3668-731-0	RING (UPPER) ASS'Y, SUB
311	X-3668-732-0	RING (LOWER) ASS'Y, SUB
<b>312</b>	<b>X-3668-733-0</b>	<b>SHAFT ASS'Y, SR GUIDE</b>
313	X-3668-742-0	BRACKET ASS'Y, MOTOR
<b>314</b>	<b>X-3668-743-0</b>	<b>PULLEY ASS'Y, WORM</b>
<b>315</b>	<b>X-3668-756-0</b>	<b>SHAFT ASS'Y, T CORRECTION GUIDE (S/N UP TO 17450)</b>
	<b>X-3668-756-3</b>	<b>SHAFT ASS'Y, T CORRECTION GUIDE (S/N 17451 AND HIGHER)</b>
316	1-603-585-00	PRINTED CIRCUIT BOARD, FR-11
317	1-603-737-00	PRINTED CIRCUIT BOARD, PH-5
318	1-606-377-00	PRINTED CIRCUIT BOARD, LM-9
<b>319</b>	<b>3-472-327-00</b>	<b>SPRING, TENSION (S/N UP TO 17450)</b>
	<b>3-437-289-00</b>	<b>SPRING, TENSION (S/N 17451 AND HIGHER)</b>
<b>320</b>	<b>3-634-196-00</b>	<b>SPRING</b>
<b>321</b>	<b>3-642-558-00</b>	<b>ARM (C), PINCH ROLLER</b>
322	3-668-743-00	NUT, PLATE, ROLLER, PRECEDING
<b>323</b>	<b>3-668-745-00</b>	<b>SPRING</b>
324	3-668-753-00	PLATE, ADJUSTMENT, FR LOCKER
325	3-668-754-00	SHAFT, GUIDE ARM, T CORRECTION
326	3-668-755-00	PLATE, STOPPER, SR
327	3-668-756-02	BRACKET, DETECTION, FR
328	3-668-757-00	SHAFT (A), RING ROLLER
329	3-668-888-00	COVER, PINCH
330	3-668-889-00	CAP, PINCH ROLLER
331	3-668-900-00	BRACKET, T SENSOR
<b>332</b>	<b>3-668-901-00</b>	<b>HOLDER, T PHOTO</b>
<b>333</b>	<b>3-668-917-00</b>	<b>ROLLER, PRECEDING</b>
<b>334</b>	<b>3-672-727-01</b>	<b>ROLLER, SR GUIDE</b>
<b>335</b>	<b>3-668-945-00</b>	<b>PULLEY, LM</b>
<b>336</b>	<b>3-668-946-00</b>	<b>BELT (38.5X1.8), SQUARE</b>
<b>337</b>	<b>3-668-947-00</b>	<b>PINION, L</b>
338	3-668-948-00	SHAFT, WORM
<b>339</b>	<b>3-668-963-00</b>	<b>ROLLER, RING</b>
<b>340</b>	<b>3-669-926-01</b>	<b>WASHER (3), THRUST</b>
341	3-669-960-00	RETAINER, SHAFT
<b>342</b>	<b>3-701-437-21</b>	<b>WASHER, POLY 2MM DIA., 0.5T</b>
<b>344</b>	<b>3-701-438-11</b>	<b>WASHER, POLY 2.5MM DIA., 0.25T</b>
<b>345</b>	<b>3-701-439-21</b>	<b>WASHER, POLY 3MM DIA., 0.5T</b>
<b>346</b>	<b>3-701-505-00</b>	<b>SET SCREW, DOUBLE POINT 3X3</b>

# THREADING ARM


# THREADING ARM

## Supply and Take-up Threading Arms

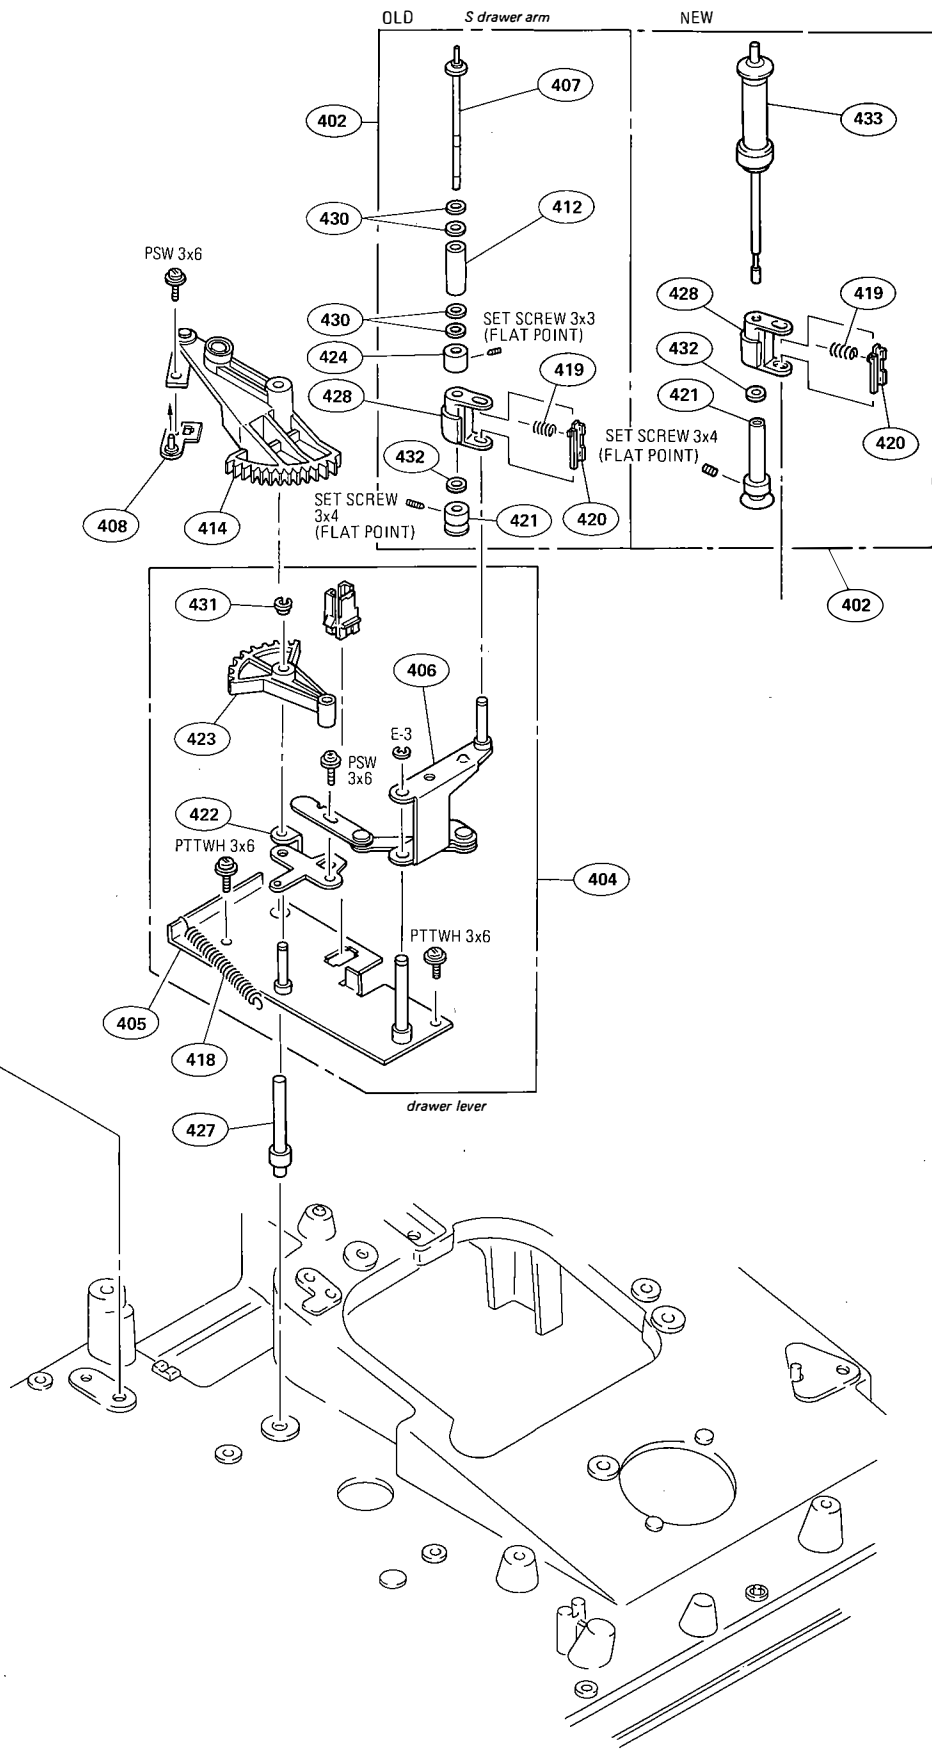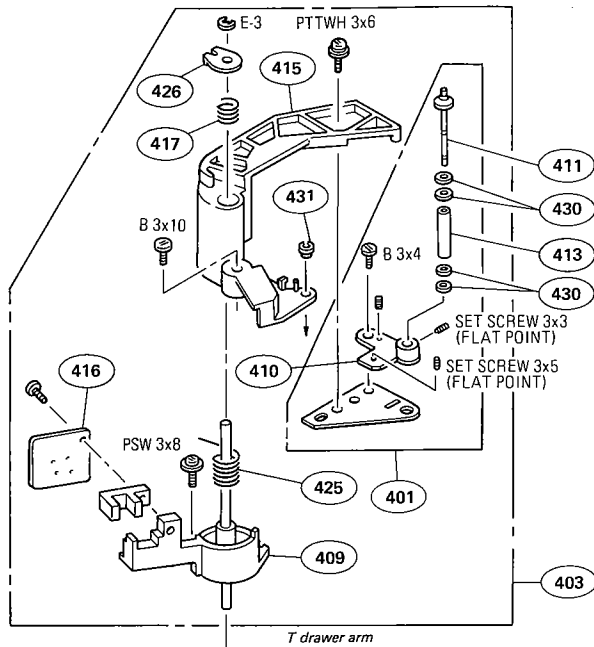


No.	Parts No.	Description
401	<b>A-6746-020-A</b>	<b>ROLLER BLOCK ASS'Y, T GUIDE</b>
402	<b>A-6746-021-B</b>	<b>ROLLER BLOCK ASS'Y, S DRAWER</b>
403	A-6750-121-A	ARM BLOCK ASS'Y, T DRAWER
404	A-6750-122-A	ARM BLOCK ASS'Y, S DRAWER
405	X-3668-710-0	BASE ASS'Y, ARM, S DRAWER
406	X-3668-711-0	ARM ASS'Y, S DRAWER
407	<b>X-3668-712-0</b>	<b>SHAFT (2) ASS'Y, ROLLER</b> (S/N UP TO 23850)
408	X-3668-713-0	LINK (B) ASS'Y, DRIVING
409	X-3668-714-0	RETAINER ASS'Y, ARM, T DRAWER
410	X-3668-715-0	PLATE ASS'Y, GUIDE, T
411	<b>X-3668-716-0</b>	<b>SHAFT (3) ASS'Y, ROLLER</b>
412	<b>X-3668-718-0</b>	<b>GUIDE ASS'Y, TAPE</b> (S/N UP TO 23850)
413	X-3668-727-0	GUIDE ASS'Y, TAPE
414	<b>X-3668-729-0</b>	<b>LEVER ASS'Y, DRAWER</b>
415	X-3668-741-0	ARM ASS'Y, T DRAWER
416	1-603-435-00	PRINTED CIRCUIT BOARD, SW-50
417	<b>3-534-854-00</b>	<b>SPRING, COMPRESSION</b>
418	<b>3-540-506-00</b>	<b>SPRING, TENSION</b>
419	<b>3-644-718-00</b>	<b>SPRING, COMPRESSION</b>
420	<b>3-668-718-00</b>	<b>RETAINER, SPRING, S DRAWER</b>
421	<b>3-668-719-00</b>	<b>HOLDER (L), S GUIDE</b> (S/N UP TO 23850)
	<b>3-668-719-03</b>	<b>HOLDER (L), S GUIDE</b> (S/N 23851 AND HIGHER)
422	3-668-720-00	LIMITER, S DRAWER
423	<b>3-668-721-00</b>	<b>ARM, S DRIVING</b>
424	3-668-724-00	FLANGE (2), LOWER (S/N UP TO 23850)
425	3-668-734-00	SPRING
426	<b>3-668-735-00</b>	<b>RETAINER, SPRING</b>
427	3-668-760-00	SHAFT, DRAWER LEVER
428	<b>3-668-833-00</b>	<b>HOLDER (M), GUIDE, S</b>
430	<b>3-701-438-01</b>	<b>WASHER, POLY 2.5MM DIA., 0.13T</b>
431	<b>3-703-074-00</b>	<b>CAP 3, SHAFT</b>
432	3-669-946-00	RING, O
433	<b>A-6746-034-A</b>	<b>ROLLER BLOCK ASS'Y (2), S DRAWER</b> (S/N 23851 AND HIGHER)

### NOTE:


- The shaded and  -marked components are critical to safety. Replace only with same components as specified.
- Parts printed in Bold-Face type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.

n Block and Capstan

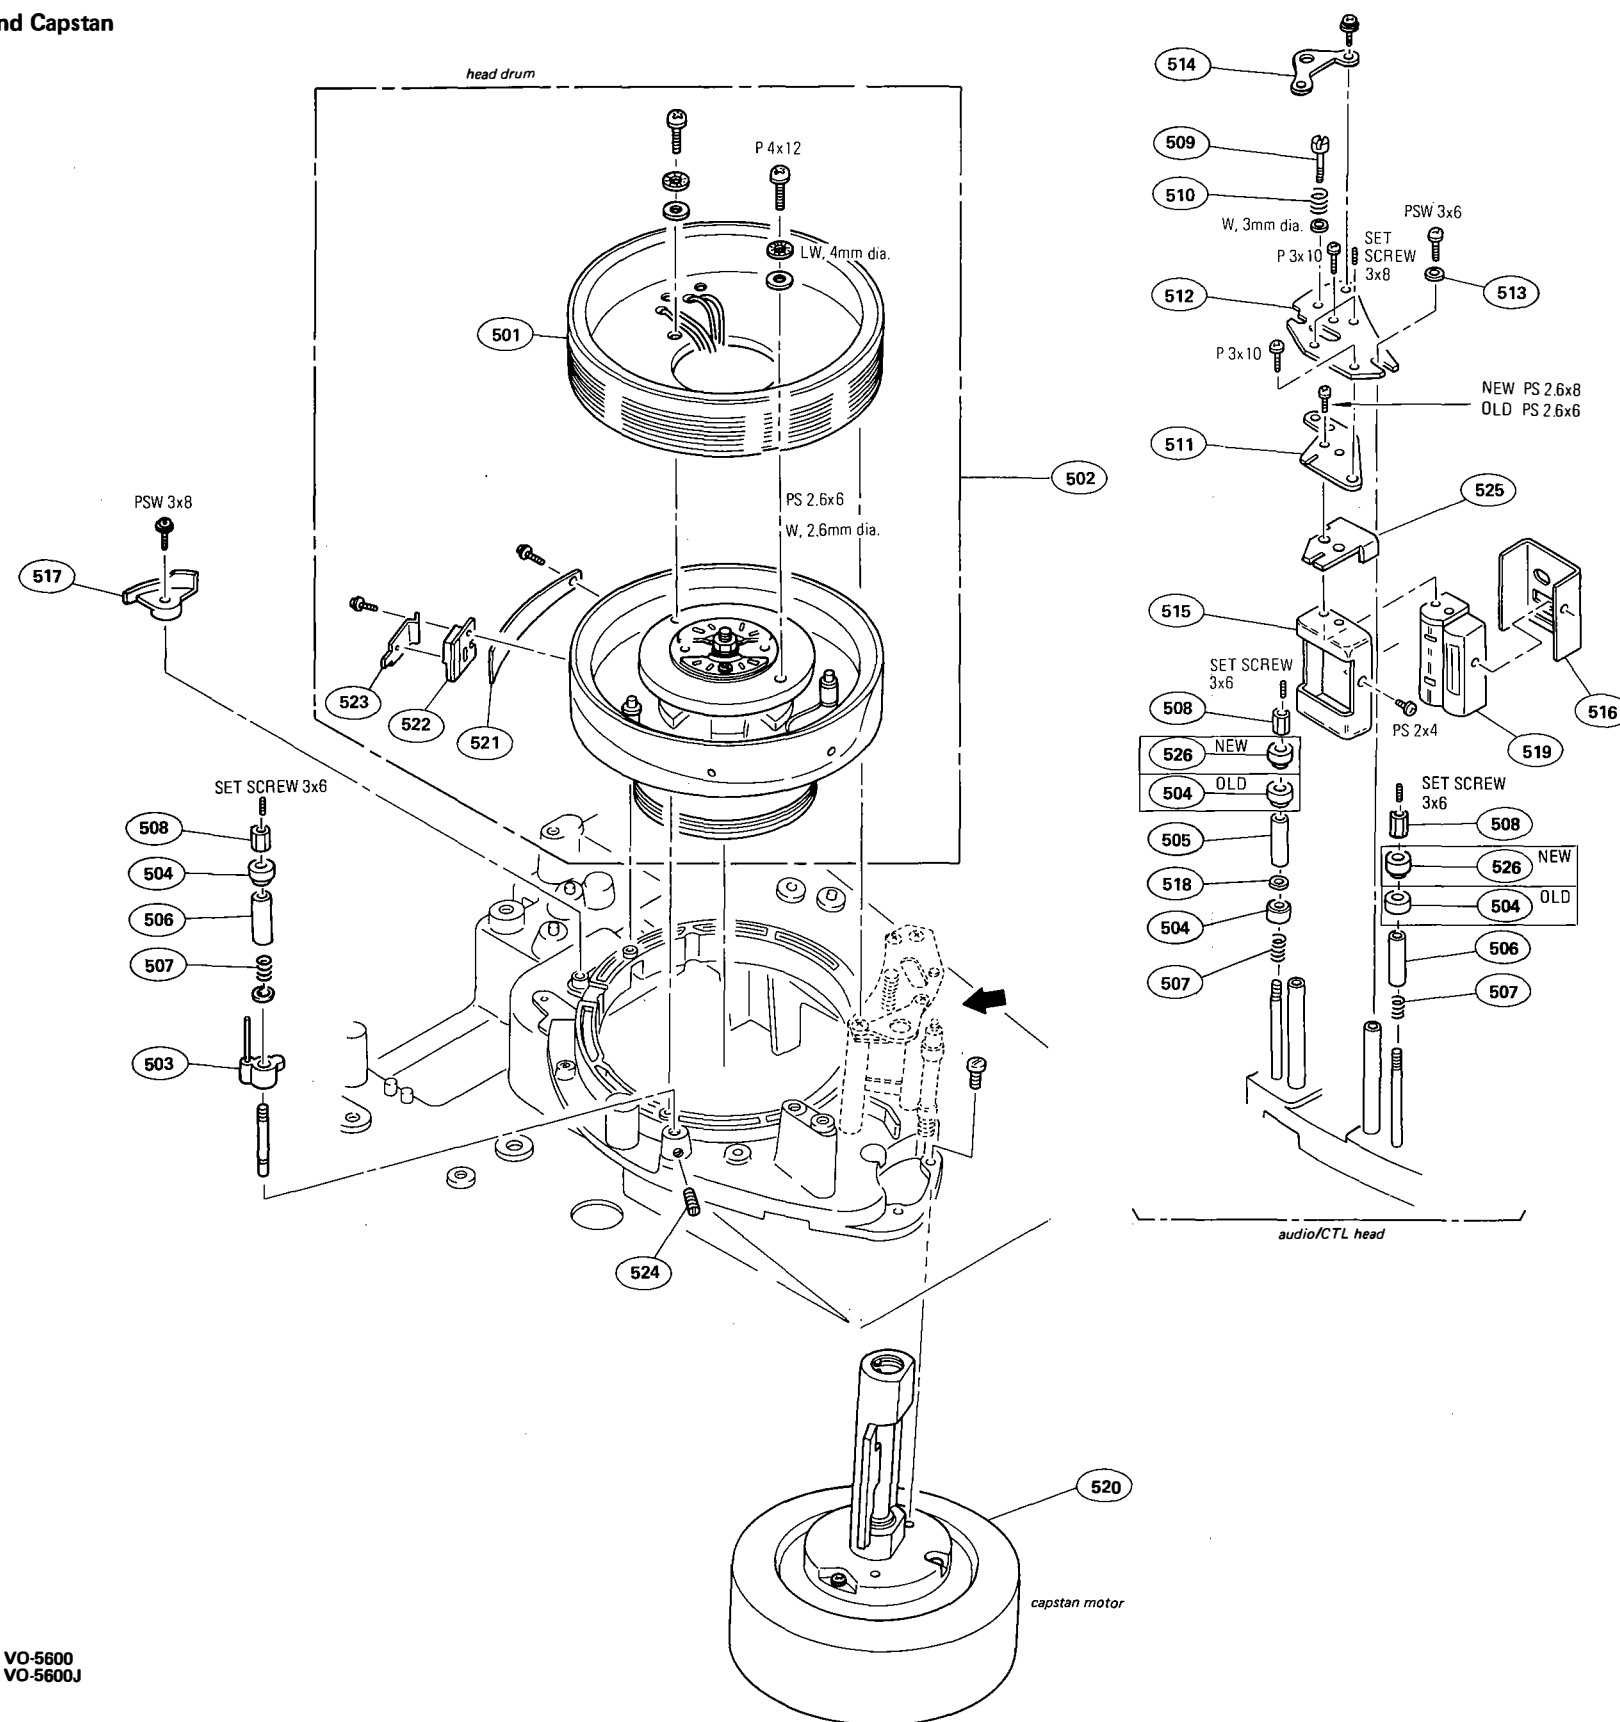

No.	Parts No.	Description
501	<b>A-6709-136-A</b>	<b>DRUM ASS'Y, UPPER, RV-5 (RP)</b>
502	<b>A-6709-396-A</b>	<b>HEAD DRUM ASS'Y, DUH-20B-R</b>
503	<b>X-3650-226-0</b>	<b>CORRECT GUIDE ASS'Y</b>
504	<b>3-641-612-00</b>	<b>GUIDE, TAPE</b>
505	<b>3-641-613-00</b>	<b>GUIDE, TAPE</b>
506	<b>3-641-614-00</b>	<b>GUIDE, TAPE</b>
507	<b>3-641-615-00</b>	<b>SPRING, COMPRESSION</b>
508	<b>3-641-616-00</b>	<b>NUT, TAPE GUIDE ADJUSTMENT</b>
509	3-641-621-00	SCREW, HEAD ADJUSTMENT
510	<b>3-641-622-00</b>	<b>SPRING, COMPRESSION</b>
511	3-641-640-00	BRACKET, C.T.L. HEAD (1)
512	3-641-641-02	BRACKET, C.T.L. HEAD (2)
513	3-645-076-00	WASHER, M-REEL S
514	3-647-815-00	PLATE, ADJUSTMENT, C.T.L. HEAD
515	3-650-301-02	COVER, HEAD, D-CTL
516	3-650-302-00	COVER, HEAD, (REAR)
517	3-668-999-00	CAM, PROTECTION
518	<b>3-669-952-00</b>	<b>WASHER, TAPE GUIDE</b>
519	<b>8-829-358-31</b>	<b>HEAD, CTL (EPP150-5803B)</b>
520	<b>8-838-019-01</b>	<b>MOTOR, DC (BHF-1600A)</b>
521	<b>1-586-633-00</b>	<b>CONDENSATION, SENSOR</b>
522	3-656-501-00	HOLDER, TERMINAL
523	3-656-502-00	PLATE, TERMINAL
524	3-701-508-00	SET SCREW, DOUBLE POINT 3X6
525	3-669-985-00	PLATE, ADJUSTMENT (S/N 22351 AND HIGHER)
526	3-688-807-01	FLANGE, TAPE GUIDE (S/N 40001 AND HIGHER)


## NOTE:

- The shaded and -marked components are critical to safety. Replace only with same components as specified.
- Parts printed in Bold-Face type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.


ERASE HEAD BASE

ERASE HEAD BASE

ie Head Base and S Guard

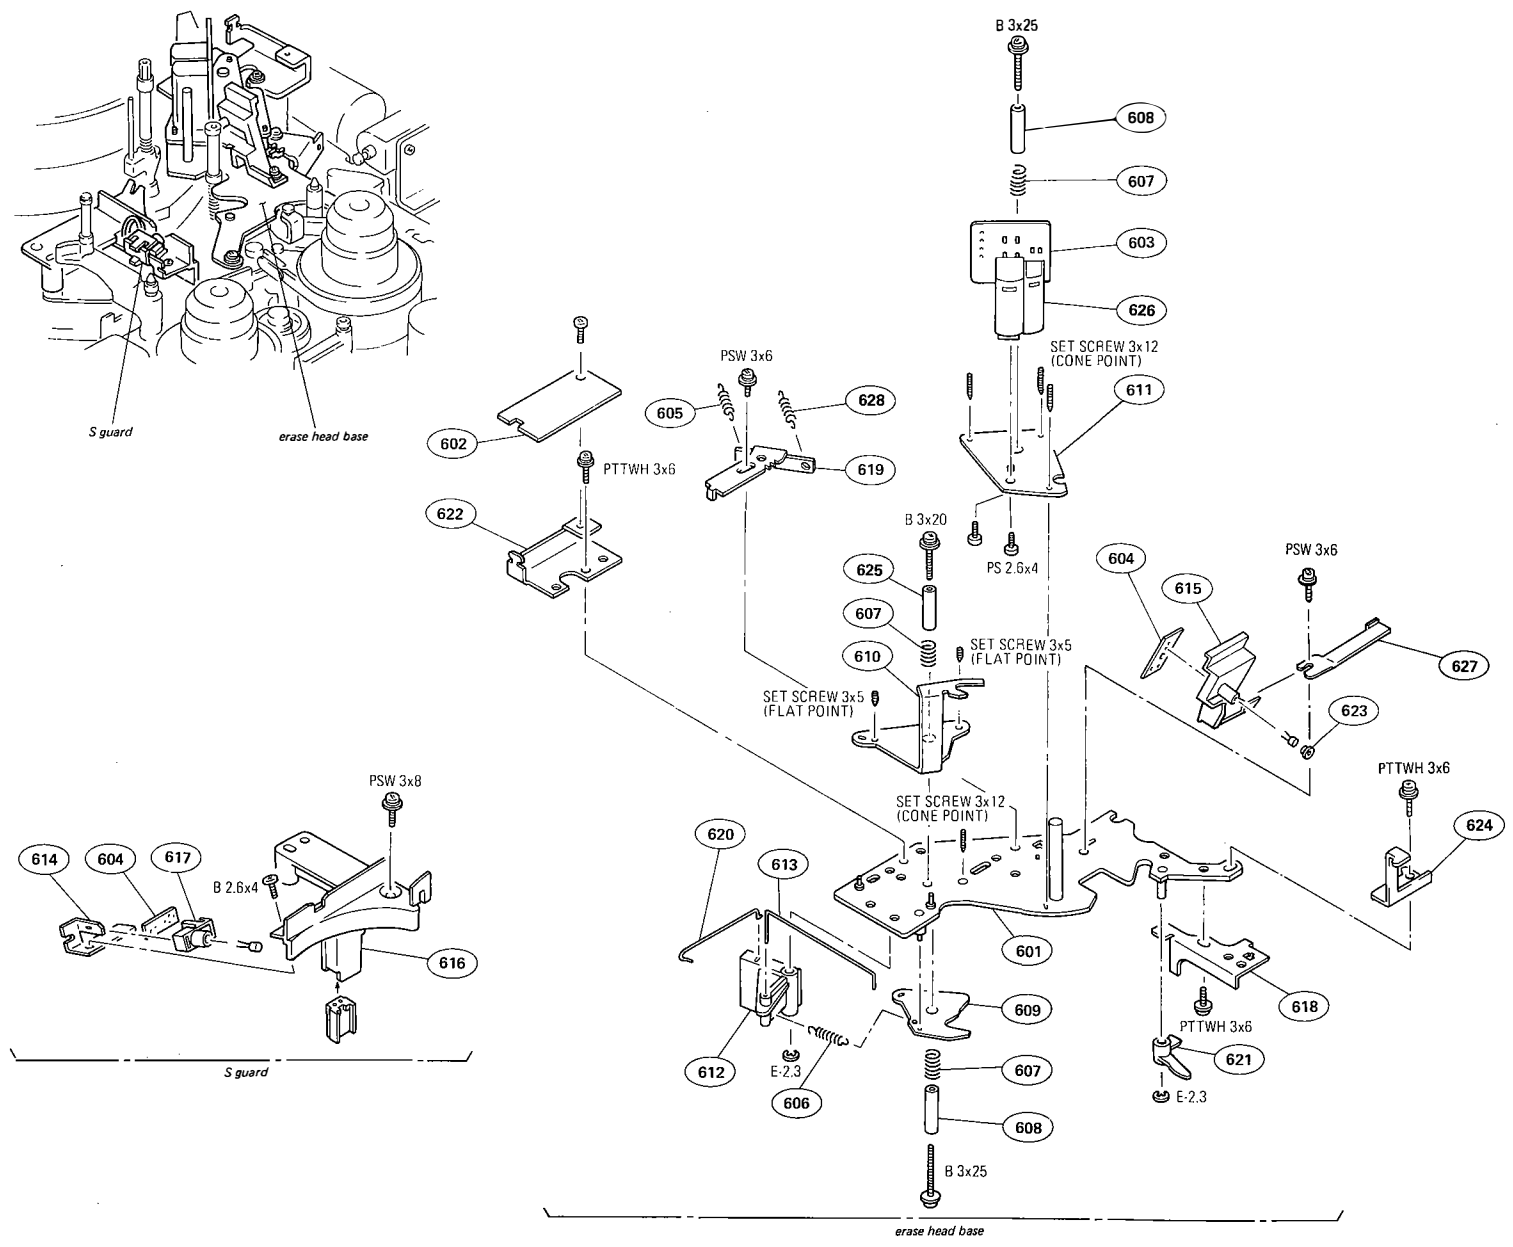


No.	Parts No.	Description
601	X-3668-728-0	DECK ASS'Y, E HEAD
602	1-586-192-00	PRINTED CIRCUIT BOARD, AH-3
603	1-603-729-00	PRINTED CIRCUIT BOARD, EC-19
604	1-603-737-00	PRINTED CIRCUIT BOARD, PH-5
605	<b>3-535-558-00</b>	<b>SPRING TENSION</b> (S/N UP TO 19450)
	<b>3-535-102-00</b>	<b>SPRING, TENSION</b> (S/N 19451 AND HIGHER)
606	<b>3-630-615-XX</b>	<b>SPRING TENSION (18T)</b>
607	<b>3-637-335-00</b>	<b>SPRING, COMPRESSION (C)</b>
608	3-657-086-00	SPACER (3-20)
609	<b>3-668-705-00</b>	<b>HOLDER (LOWER), S</b>
610	<b>3-668-706-00</b>	<b>HOLDER (UPPER), S</b>
611	3-668-707-00	TABLE, HEAD, E
612	3-668-708-00	ARM, DRIVING, CORRECTION GUIDE
613	<b>3-668-709-00</b>	<b>ROD, PULL, CORRECTION GUIDE</b>
614	3-668-809-02	BRACKET, HOLDER
615	3-668-832-02	HOLDER (S)
616	<b>3-668-836-02</b>	<b>GUARD, S</b>
617	3-668-837-00	HOLDER, LED
618	3-668-859-00	STOPPER, RING
619	3-668-860-00	HOOK, SPRING, TENSION REGULATOR
620	3-668-884-03	JOINT, RESERVE PRESS
621	3-668-894-00	LEVER, RELEASE
622	3-668-962-00	BRACKET, AH PC BOARD
623	3-669-920-00	COVER, S PHOTO
624	3-669-963-00	SPRING, LEAF, GROUND (S/N 10951 AND HIGHER)
625	<b>4-855-006-11</b>	<b>SPACER, PIPE</b>
626	<b>8-825-513-20</b>	<b>HEAD, CTL ERASE (EPP170-58)</b>
627	3-669-964-00	PLATE, GROUND (S/N 14151 AND HIGHER)
628	<b>3-534-238-XX</b>	<b>SPRING TENSION (23T)</b>

- NOTE:
- The shaded and  -marked components are critical to safety. Replace only with same components as specified.
  - Parts printed in Bold-Face type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.
  - Item with no part number and/or no description are not stocked because they are seldom required for routine service.


PINCH LEVER      PINCH LEVER

h Lever and Pinch Solenoid

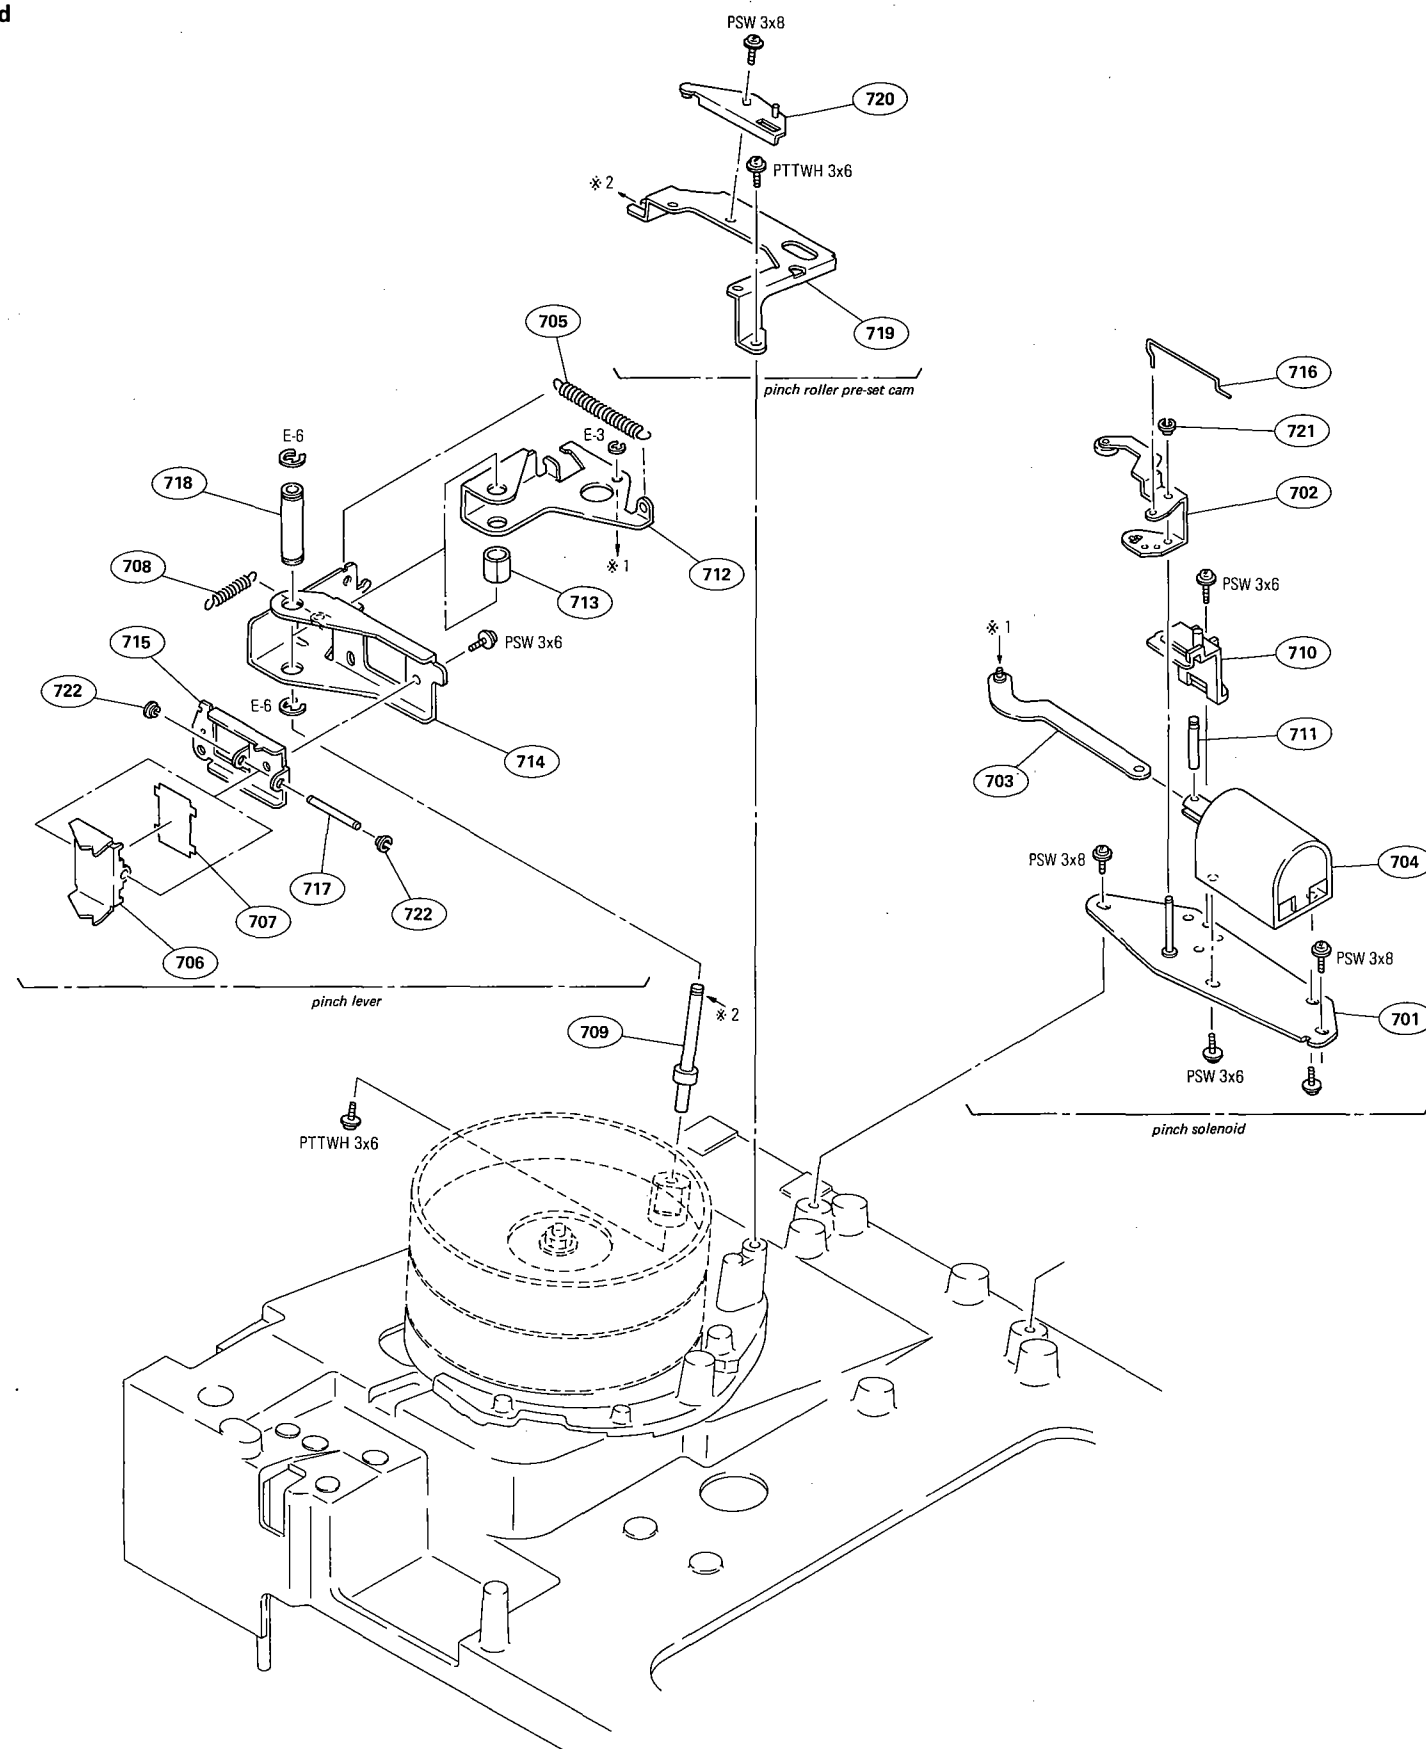

No.	Parts No.	Description
701	X-3668-734-0	BASE ASS'Y, PINCH PRESS
<b>702</b>	<b>X-3668-735-3</b>	<b>LEVER ASS'Y, RESERVE PRESS</b>
703	X-3668-736-0	JOINT ASS'Y
<b>704</b>	<b>1-454-286-00</b>	<b>SOLENOID</b>
<b>705</b>	<b>3-610-265-02</b>	<b>SPRING</b>
706	3-642-518-00	LEVER, PINCH
707	3-642-519-00	SPRING
<b>708</b>	<b>3-645-392-00</b>	<b>SPRING, TENSION</b>
709	3-668-862-00	SHAFT, PRESS LEVER, PINCH
<b>710</b>	<b>3-668-863-00</b>	<b>GUIDE, ARBOR</b>
<b>711</b>	<b>3-668-864-00</b>	<b>PIN, SOLENOID</b>
712	3-668-865-00	LEVER (B), PINCH PRESS
713	3-668-867-00	SPACER (8X9)
714	3-668-868-00	LEVER (A), PINCH PRESS
715	3-668-863-00	PLATE, ADJUSTMENT, PINCH PRESS
716	3-668-884-03	JOINT, RESERVE PRESS
717	3-668-895-00	SHAFT
718	3-668-896-00	SLEEVE, PRESS LEVER, PINCH
719	3-668-997-00	DECK, P SUB PRESS
720	3-668-998-00	CAM, SUB PRESS
<b>721</b>	<b>3-703-074-00</b>	<b>CAP 3, SHAFT</b>
<b>722</b>	<b>3-703-075-00</b>	<b>CAP 2, SHAFT</b>

NOTE:


1. The shaded and -marked components are critical to safety. Replace only with same components as specified.
2. Parts printed in Bold-Face type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.
3. Item with no part number and/or no description are not stocked because they are seldom required for routine service.




CASSETTE-UP COMPARTMENT

CASSETTE-UP COMPARTMENT

ette-up Compartment

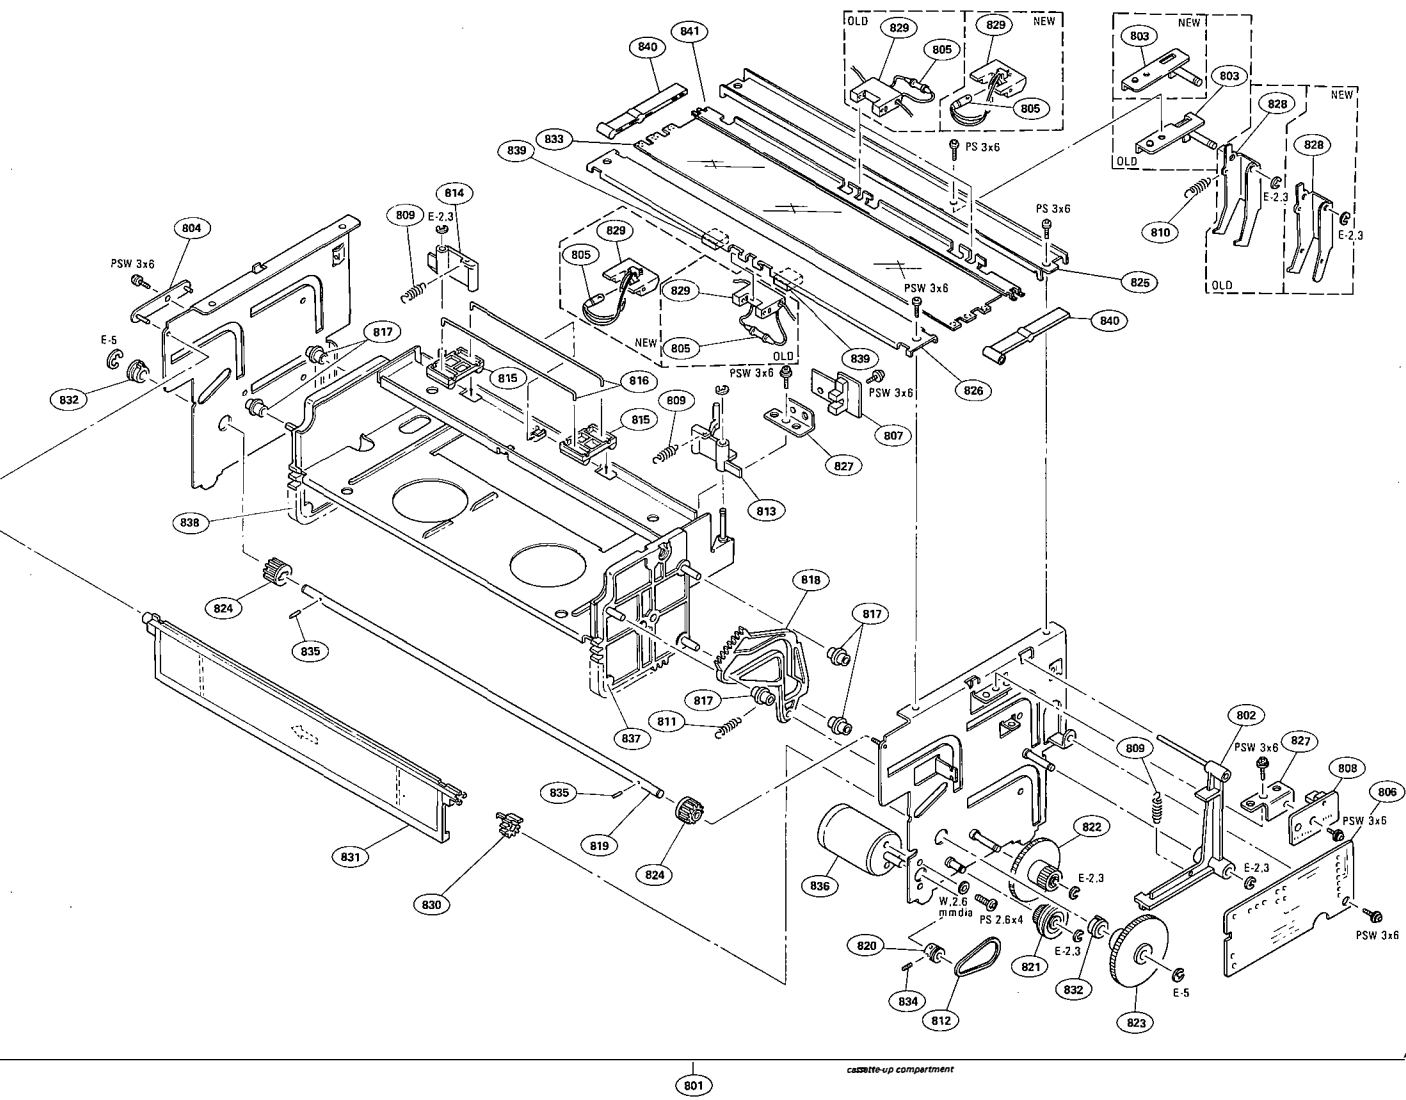

NOTE:


1. The shaded and  -marked components are critical to safety. Replace only with same components as specified.
2. Parts printed in **Bold-Face** type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face** type will be processed, but allow for additional delivery time.
3. Item with no part number and/or no description are not stocked because they are seldom required for routine service.

836	8-835-055-01	MOTOR, DC (DNR-4700A)
837	X-3668-057-0	RACK ASS'Y CASECON (RIGHT)
838	X-3668-058-0	RACK ASS'Y CASECON (LEFT)
839	3-672-926-00	CUSHION LID (S/N 14651 AND HIGHER)
840	3-668-313-02	FRAME, SUPPORT, REFLECTOR
841	3-672-639-03	BRACKET, LAMP

No.	Parts No.	Description
801	<b>A-6751-104-A</b>	<b>CASSETTE-UP ASS'Y</b>
802	<b>X-3668-059-0</b>	<b>ARM ASS'Y, SWITCH, DOWN</b>
803	X-3668-060-0	HOLDER ASS'Y, ARM (S/N: UP TO 15650)
	X-3668-060-3	HOLDER ASS'Y, ARM (S/N: 15651 AND LATER)
804	X-3668-061-0	SUPPORT ASS'Y, LID
805	<b>1-518-455-00</b>	<b>LAMP, PILOT</b> (S/N UP TO 15650)
	<b>1-518-508-00</b>	<b>LAMP, PILOT</b> (S/N 15651 AND HIGHER)
806	1-604-429-00	PRINTED CIRCUIT BOARD, CC-9
807	1-604-430-00	PRINTED CIRCUIT BOARD, CC-10
808	1-604-431-00	PRINTED CIRCUIT BOARD, CC-11
809	<b>3-507-051-00</b>	<b>SPRING, TENSION</b>
810	<b>3-534-217-00</b>	<b>SPRING, TENSION</b>
811	<b>3-536-780-00</b>	<b>SPRING, TENSION</b>
812	<b>3-653-387-00</b>	<b>BELT, LM</b>
813	3-668-295-00	LEVER (RIGHT), CASSETTE PUSH-OUT
814	3-668-296-00	LEVER (LEFT), CASSETTE PUSH-OUT
815	<b>3-668-297-00</b>	<b>RETAINER, CASSETTE</b>
816	3-668-298-00	SPRING
817	<b>3-668-299-00</b>	<b>ROLLER, GUIDE</b>
818	3-668-300-00	CAM, LID OPEN
819	3-668-301-00	SHAFT, DRIVING
820	<b>3-668-302-00</b>	<b>PULLEY, MOTOR</b>
821	<b>3-668-303-00</b>	<b>GEAR (A)</b>
822	<b>3-668-304-00</b>	<b>GEAR (B)</b>
823	<b>3-668-305-00</b>	<b>GEAR (C)</b>
824	<b>3-668-306-00</b>	<b>GEAR (D)</b>
825	3-668-307-00	JOINT (R), LEFT & RIGHT (S/N: UP TO 13050)
	3-668-307-02	JOINT (R), LEFT & RIGHT (S/N: 13051 AND LATER)
826	3-668-308-00	JOINT (F), LEFT & RIGHT
827	3-668-309-00	BRACKET, SWITCH
828	3-668-310-00	ARM, LID OPEN (S/N UP TO 15650)
	3-668-310-02	ARM, LID OPEN (S/N 15651 AND HIGHER)
829	<b>3-668-314-00</b>	<b>HOLDER, LAMP</b> (S/N UP TO 15650)
	<b>3-668-314-02</b>	<b>HOLDER, LAMP</b> (S/N 15651 AND HIGHER)
830	<b>3-668-315-02</b>	<b>GEAR, LID</b>
831	<b>3-668-371-00</b>	<b>LID, CASSETTE</b>
832	<b>3-668-474-00</b>	<b>BEARING (6)</b>
833	<b>3-672-604-11</b>	<b>REFLECTOR</b>
834	<b>3-701-506-01</b>	<b>SET SCREW, DOUBLE POINT 3X4</b>
835	3-703-358-00	PIN, PARALLEL (DIA. 2X8)


# FUNCTION CONTROL FUNCTION CONTROL

tion Control

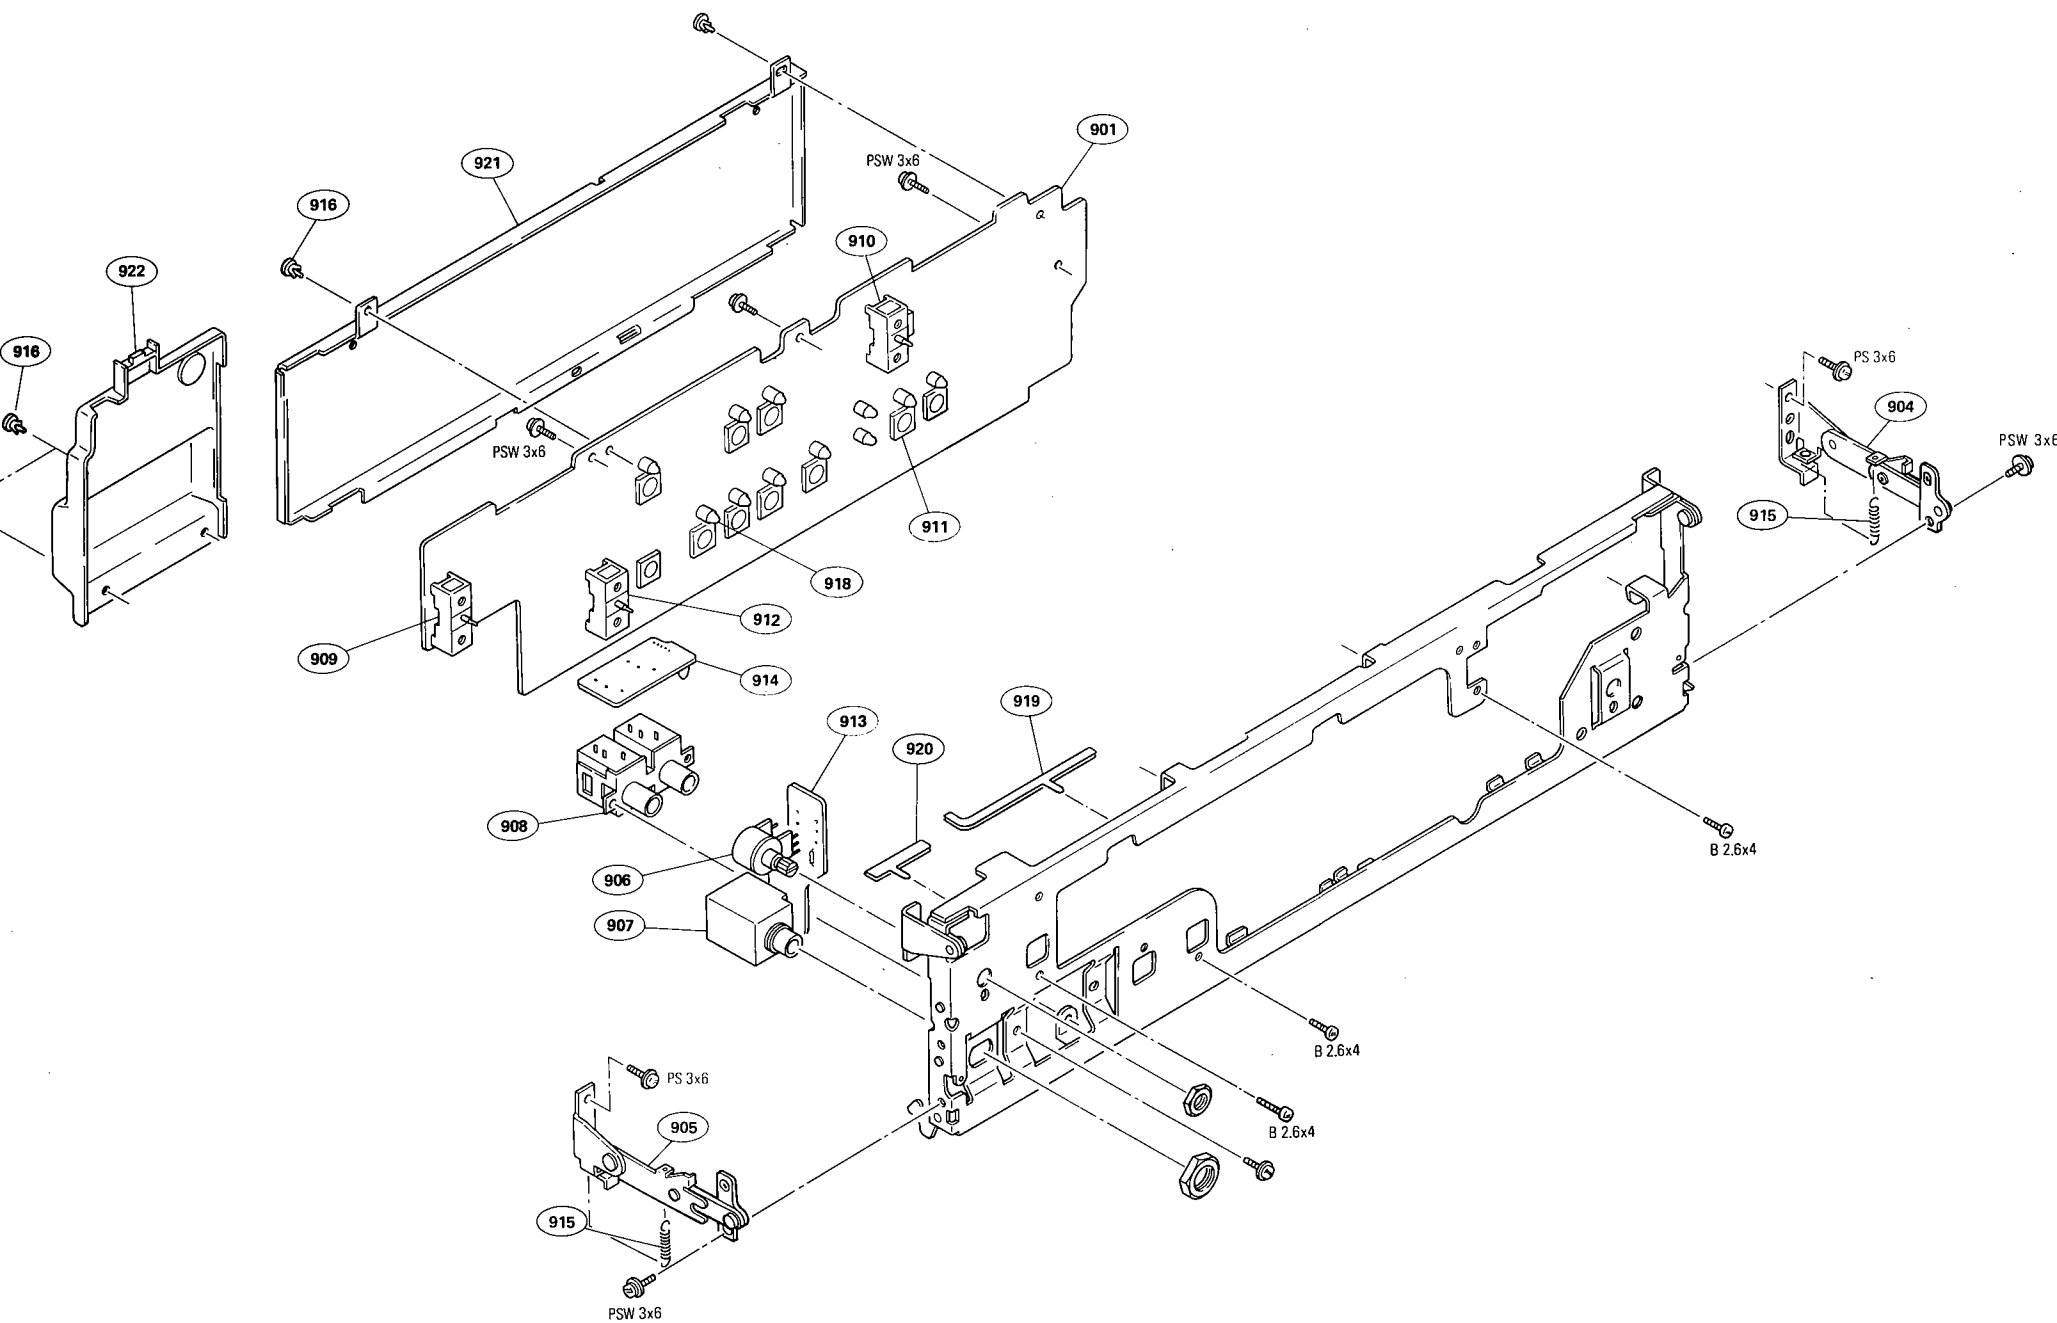

No.	Parts No.	Description
901	A-6728-398-A	MOUNTED CIRCUIT BOARD, KY-21
904	X-3668-766-0	STAY (RIGHT) ASS'Y, LOCK
905	X-3668-765-0	STAY (LEFT) ASS'Y, LOCK
906	1-228-218-00	RES, VAR, CARBON 500/500
907	1-507-553-00	JACK
908	1-507-733-00	JACK (LARGE TYPE)
909	1-516-963-00	SWITCH, LEVER SLIDE
910	1-516-995-00	SWITCH, LEVER SLIDE
911	1-552-539-00	SWITCH, KEY BOARD
912	1-553-003-00	SWITCH, LEVER SLIDE
913	1-606-366-00	PRINTED CIRCUIT BOARD, HP-6
914	1-606-381-00	PRINTED CIRCUIT BOARD, MI-5
915	3-437-288-00	SPRING, TENSION
916	3-531-576-11	RIVET
918	3-669-905-00	HOLDER, LAMP
919	3-672-603-00	PROTECTOR (A), HARNESS
920	3-672-606-00	PROTECTOR (B), HARNESS
921	3-672-608-00	PLATE, BOTTOM, KEY BOARD
922	3-672-609-00	COVER, MICROPHONE JACK


## NOTE:

- The shaded and -marked components are critical to safety. Replace only with same components as specified.
- Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.

# CHASSIS (1)

# CHASSIS (1)

ssis (bottom view)

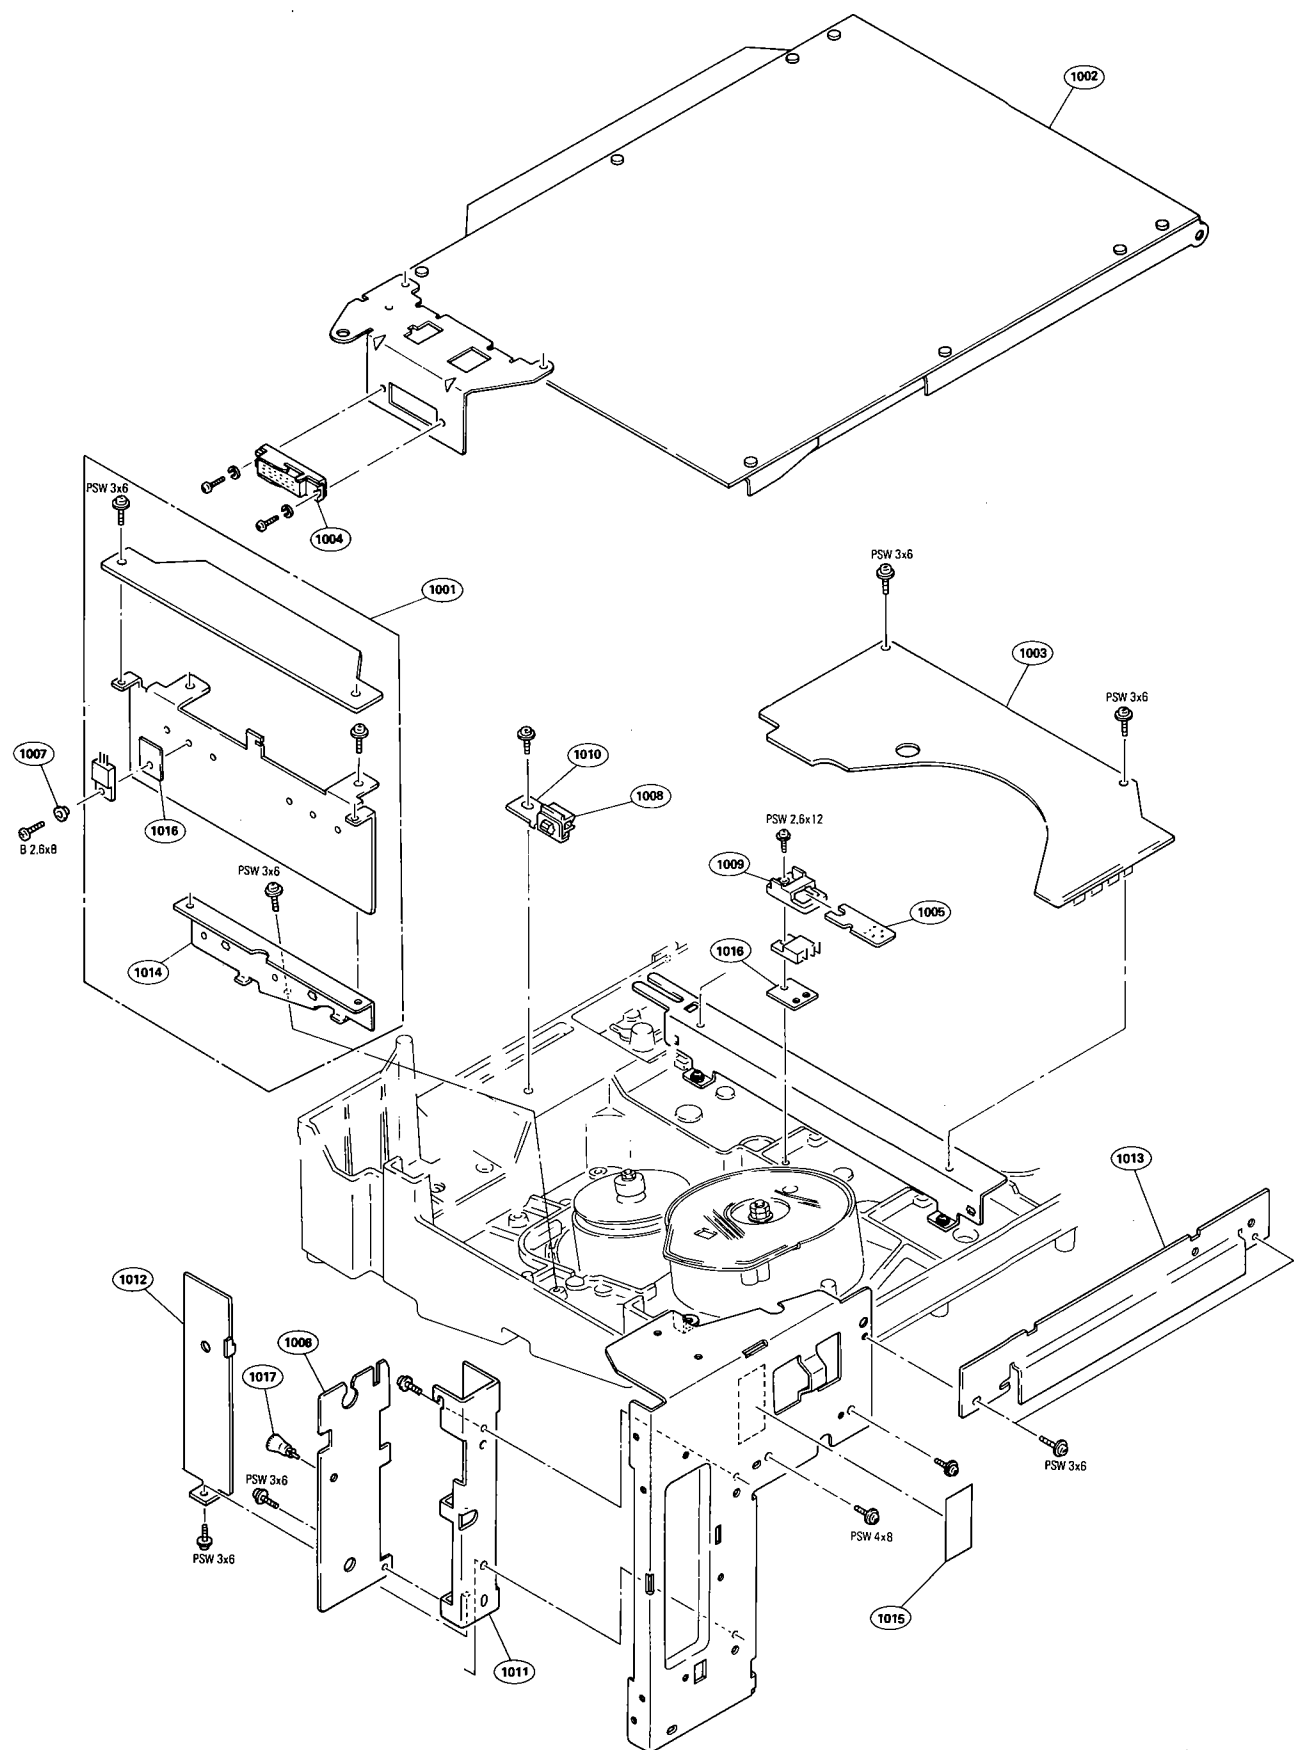

No. Parts No. Description


⚠ 1001	A-6715-138-A	MOUNTED CIRCUIT BOARD, DR-17
⚠ 1002	A-6717-249-C	MOUNTED CIRCUIT BOARD, SY-75 (S/N UP TO 18450)
⚠ 1002	A-6717-249-D	MOUNTED CIRCUIT BOARD, SY-75 (S/N 18451 AND HIGHER)
⚠ 1003	A-6725-357-A	MOUNTED CIRCUIT BOARD, MR-11A
1004	1-561-583-00	<b>RECEPTACLE (FEMALE) 33P</b>
1005	1-605-018-00	PRINTED CIRCUIT BOARD, PT-9
⚠ 1006	1-606-378-00	PRINTED CIRCUIT BOARD, DC-13
1007	2-832-007-00	<b>BUSHING (K), INSULATING</b>
1008	3-642-310-00	HOLDER, CIRCUIT BOARD
1009	3-669-904-00	HOLDER, PT
1010	3-669-927-00	SUPPORT, MR
1011	3-672-611-00	BRACKET, DC
1012	3-672-616-00	PROTECTOR, HARNESS, DC
1013	3-672-620-00	BRACKET, MR (S/N: UP TO 10050)
	3-672-620-02	BRACKET, MR (S/N: 10051 AND LATER)
1013	3-672-620-02	BRACKET, MR
1014	3-672-643-00	SUPPORT, DR
1015	3-703-044-26	LABEL, CAUTION
1016	3-703-207-11	<b>INSULATOR, TO-220</b>
1017	3-703-356-00	<b>RIVET, T TYPE</b>

## NOTE:

- The shaded and ⚠-marked components are critical to safety. Replace only with same components as specified.
- Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.

# CHASSIS (2) CHASSIS (2)

asis (rear view)

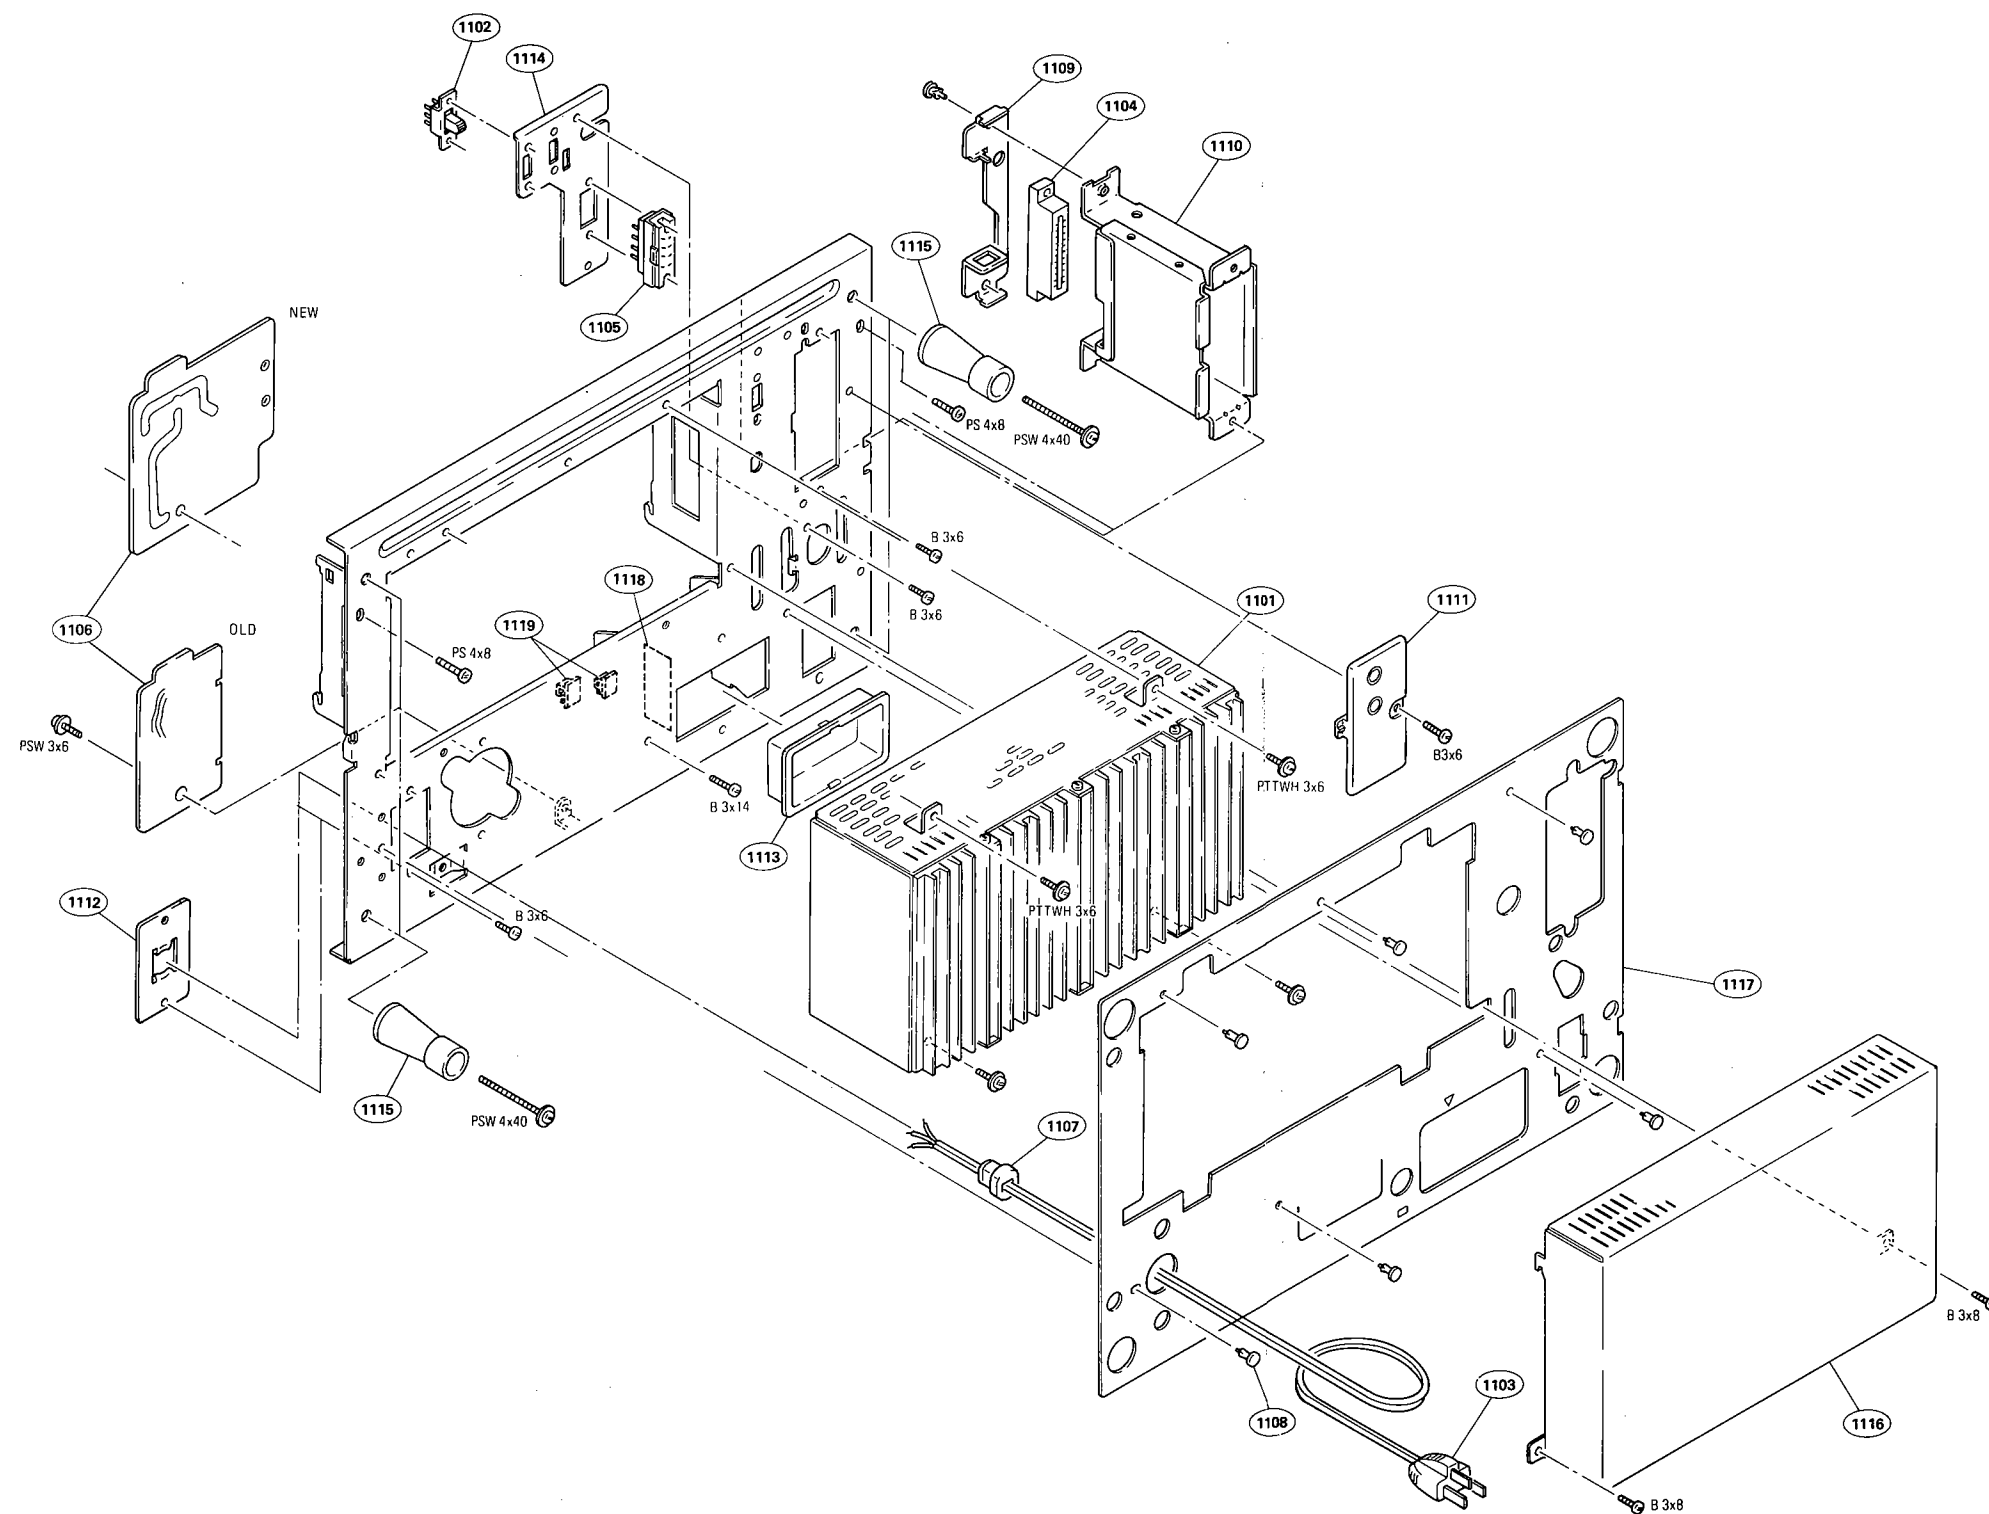

No.	Parts No.	Description
<b>1101</b>	<b>1-413-069-00</b>	<b>SWITCHING REGULATOR (UR-01)</b>
<b>1102</b>	<b>1-516-779-XX</b>	<b>SLIDE SWITCH</b>
<b>1103</b>	<b>1-534-517-41</b>	<b>CORD, AC</b>
<b>1104</b>	<b>1-561-280-00</b>	<b>CONNECTOR, PC BOARD (10P)</b>
<b>1105</b>	<b>1-561-671-00</b>	<b>SOCKET, MULTI CONNECTOR 8P</b>
1106	1-603-727-00	PRINTED CIRCUIT BOARD, AC-26 (S/N UP TO 23850)
	1-610-573-00	PRINTED CIRCUIT BOARD, AC-45 (S/N 23851 AND HIGHER)
<b>1107</b>	<b>2-045-063-00</b>	<b>STOPPER, CORD</b>
<b>1108</b>	<b>3-531-576-11</b>	<b>RIVET</b>
1109	3-663-105-00	PLATE (N), CONNECTOR, RF
1110	3-667-805-00	CASE, MD
1111	3-667-811-00	LID, MD
1112	3-667-816-00	BRACKET (U), CORD STOPPER
1113	3-668-814-00	ESCUTCHEON, CONNECTOR
1114	3-668-842-00	PLATE, CONNECTOR, SUB
<b>1115</b>	<b>3-668-924-00</b>	<b>FOOT, REAR</b>
1116	3-668-989-00	COVER, SWITCH REGULATOR
1117	3-672-612-00	PLATE (U), ORNAMENTAL, REAR PANEL
1118	3-703-044-26	LABEL, CAUTION
1119	3-703-072-00	HOLDER, PCB



## NOTE:

- The shaded and **Δ**-marked components are critical to safety. Replace only with same components as specified.
- Parts printed in **Bold-Face** type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face** type will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.

METER PANEL CHASSIS (3)

er Panel

Chassis (top view)

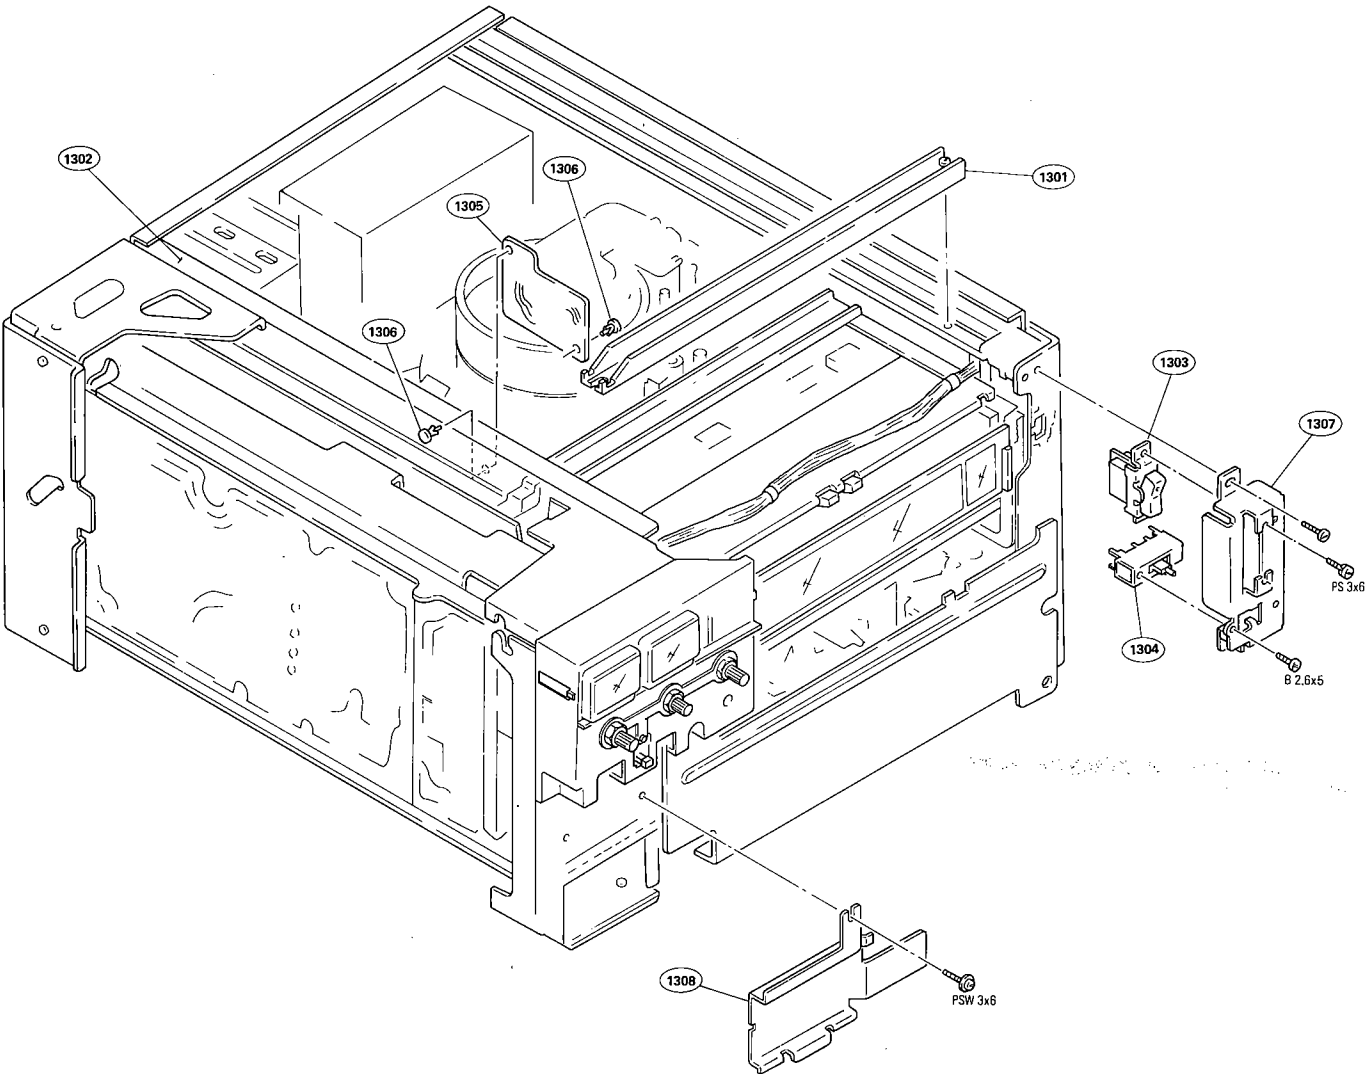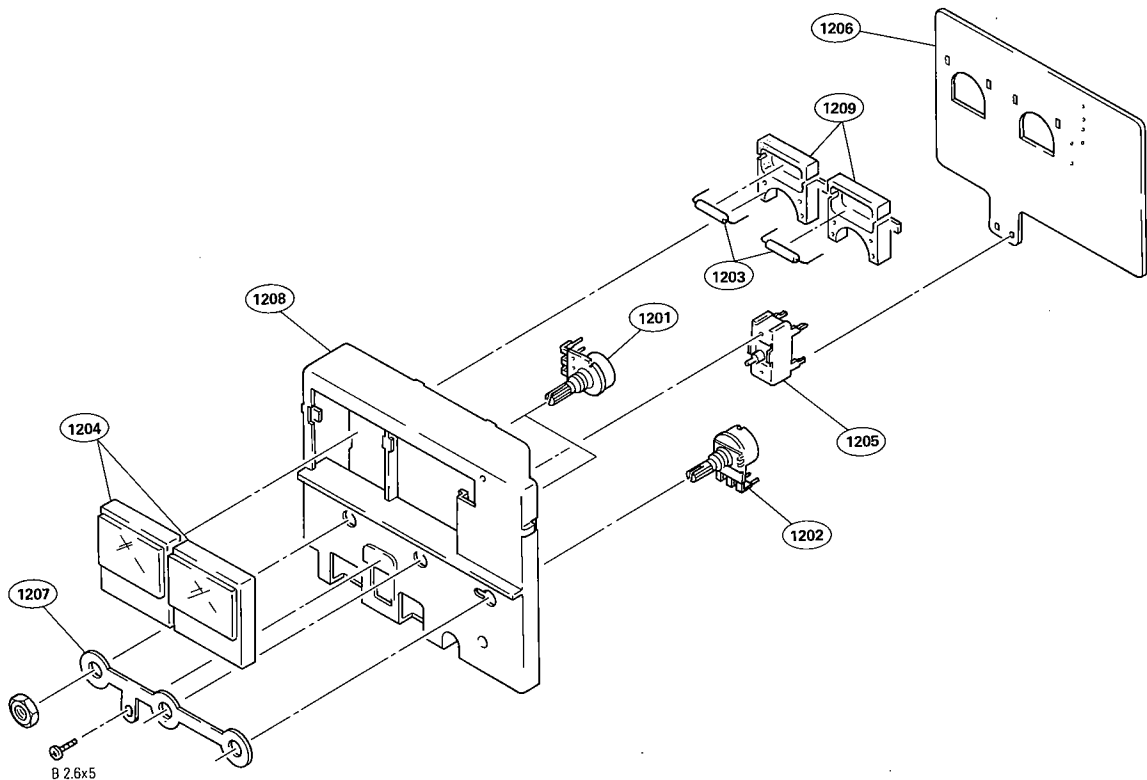

Parts No.	Description
1-226-395-00	RES, VAR, CARBON 20K
1-226-983-00	RES, VAR, CARBON 100K
1-518-462-00	LAMP, PILOT
1-520-393-00	METER, AUDIO
1-553-003-00	SWITCH, LEVER SLIDE
1-603-735-00	PRINTED CIRCUIT BOARD, MC-14
3-667-801-00	PLATE (R), GROUND
3-667-810-00	PANEL (RECORDER), METER (S/N: UP TO 13050)
3-667-810-03	PANEL (RECORDER), METER (S/N: 13051 AND LATER)
3-668-825-00	HOLDER, LAMP

- NOTE:
- The shaded and -marked components are critical to safety. Replace only with same components as specified.
  - Parts printed in Bold-Face type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.
  - Item with no part number and/or no description are not stocked because they are seldom required for routine service.


No.	Parts No.	Description
1301	A-6730-498-A	BRACKET ASS'Y
1302	X-3672-606-0	BEAM ASS'Y, LEFT
1303	1-553-515-00	SWITCH, ROCKER
1304	1-553-789-00	SWITCH, SLIDE
1305	1-606-379-00	PRINTED CIRCUIT BOARD, CN-42
1306	3-531-576-11	RIVET
1307	3-668-811-00	BRACKET, SWITCH, POWER
1308	3-672-610-00	PLATE, SHIELD

- NOTE:
- The shaded and -marked components are critical to safety. Replace only with same components as specified.
  - Parts printed in Bold-Face type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.
  - Item with no part number and/or no description are not stocked because they are seldom required for routine service.




PRINTED CIRCUIT BOARD

PRINTED CIRCUIT BOARD

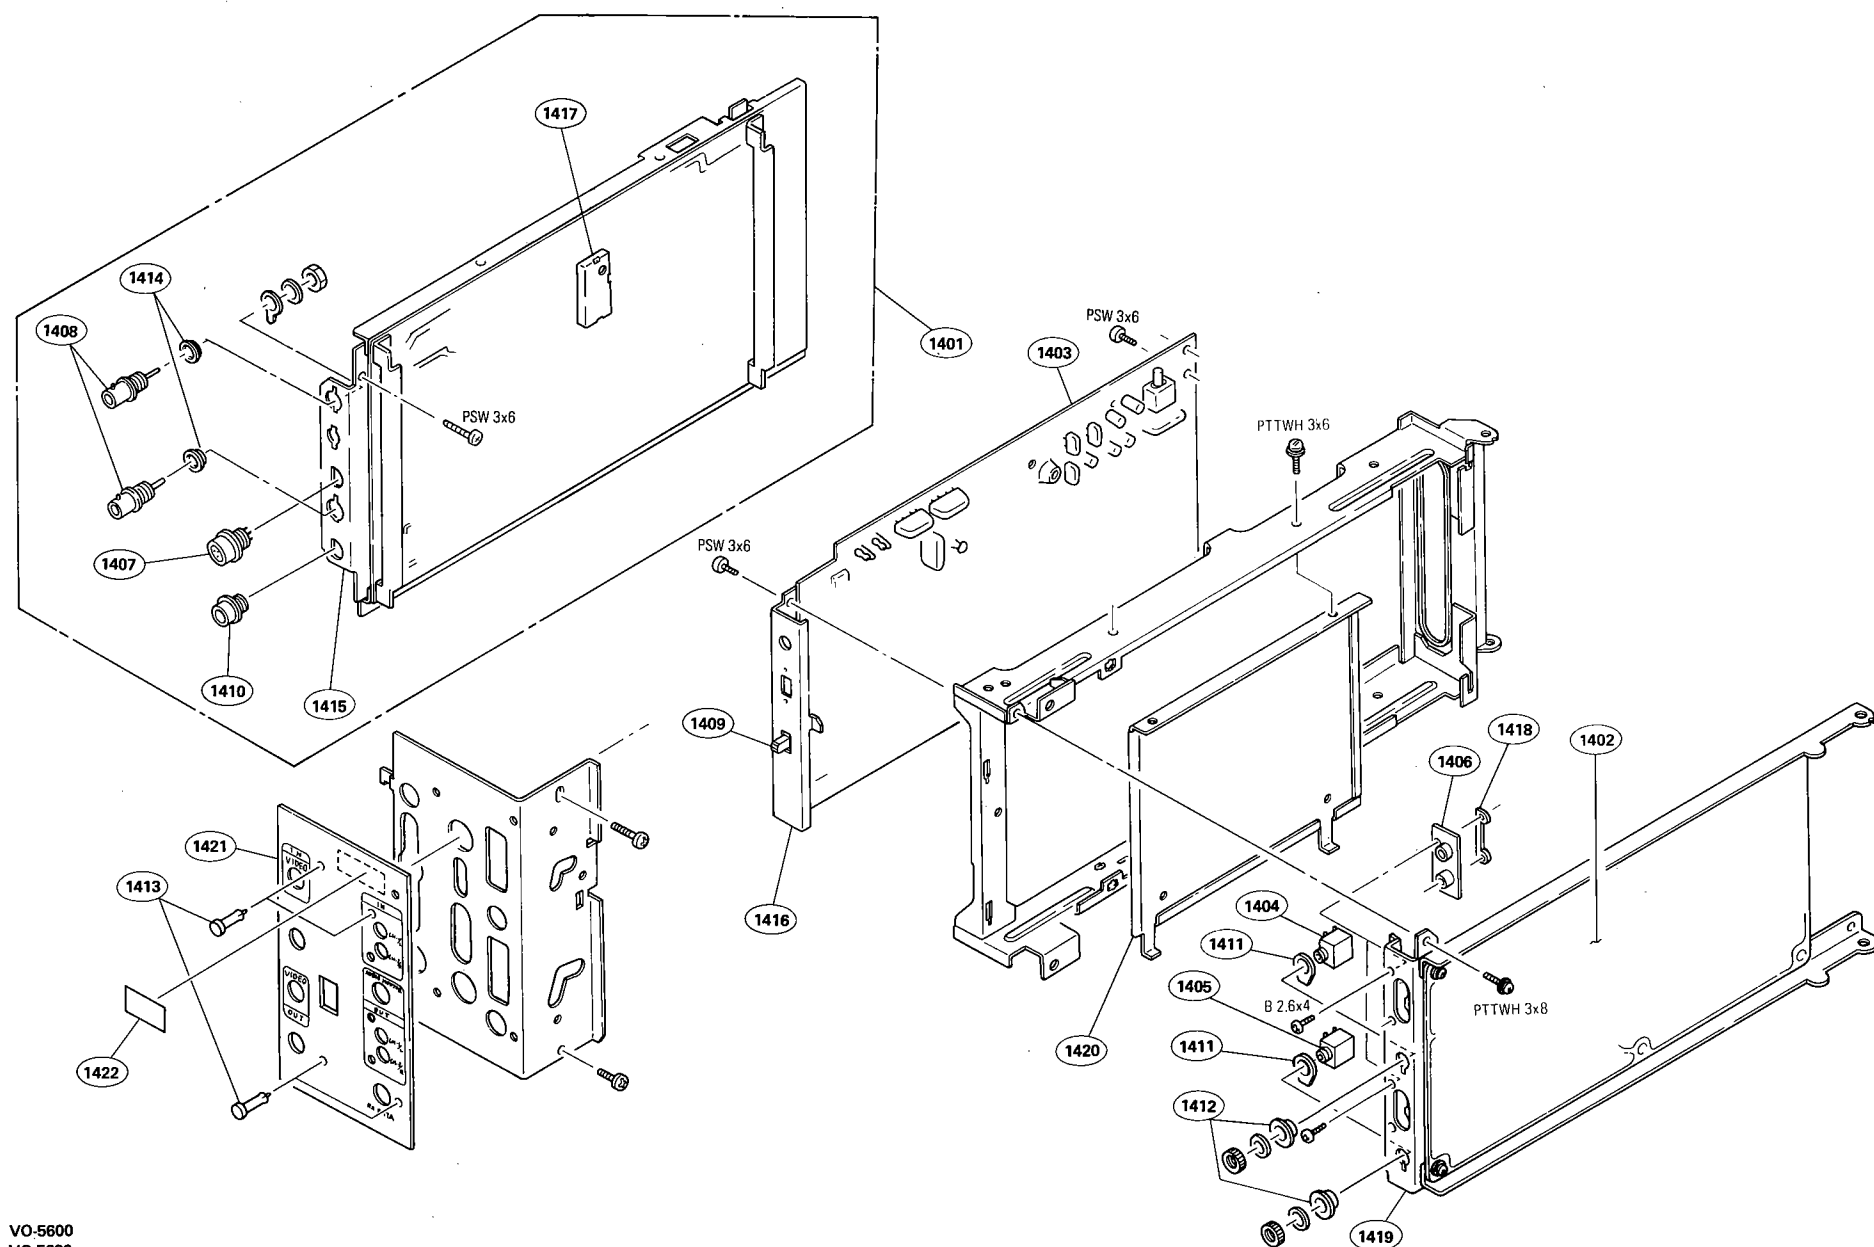
Printed Circuit Boards



VO-5600  
VO-5630

No.	Parts No.	Description
 1401	A-6711-325-A	MOUNTED CIRCUIT BOARD, VO-9
 1402	A-6713-122-A	MOUNTED CIRCUIT BOARD, AU-28
 1403	A-6715-137-A	MOUNTED CIRCUIT BOARD, SV-44
1404	1-507-251-XX	JACK
1405	1-507-473-XX	JACK, JM-35 M-7A
1406	1-507-732-00	JACK, PIN 2P
1407	1-509-891-00	RECEPTACLE, BNC (S/N UP TO 21850)
	1-562-261-00	RECEPTACLE, BNC (S/N 21851 AND HIGHER)
1408	1-607-619-00	PRINTED CIRCUIT BOARD, DS-14
1409	3-437-228-00	INSULATOR, JACK
1410	3-437-229-01	INSULATOR (B), JACK
1411	3-531-576-11	RIVET
1412	3-654-545-00	SPACER, BNC (S/N UP TO 21850)
	3-669-984-00	WASHER (DIA. 9.6) (S/N 21851 AND HIGHER)
1413	3-667-803-00	PANEL, VO CONNECTOR (S/N UP TO 21850)
	3-667-803-03	PANEL, VO CONNECTOR (S/N 21851 AND HIGHER)
1414	3-667-804-00	PANEL, SV CONNECTOR (S/N UP TO 21850)
	3-667-804-02	PANEL, VO CONNECTOR (S/N 21851 AND HIGHER)
1415	3-668-841-00	BRACKET, 2P PIN JACK
1416	3-668-848-00	PANEL, AU CONNECTOR
1417	3-669-908-00	SHIELD, AU
1418	3-672-607-00	PLATE (VO) (N), ORNAMENTAL
1419	3-672-634-00	LID, SHIELD, VO
1420	3-672-636-00	SHIELD (LOWER)
1421	3-672-638-00	SHIELD (LOWER), VO
1422	3-703-845-01	LABEL (N), MAIN CAUTION


NOTE:

- The shaded and  -marked components are critical to safety. Replace only with same components as specified.
- Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.

ORNAMENTAL PANEL (1)

ORNAMENTAL PANEL (1)


namental Panel

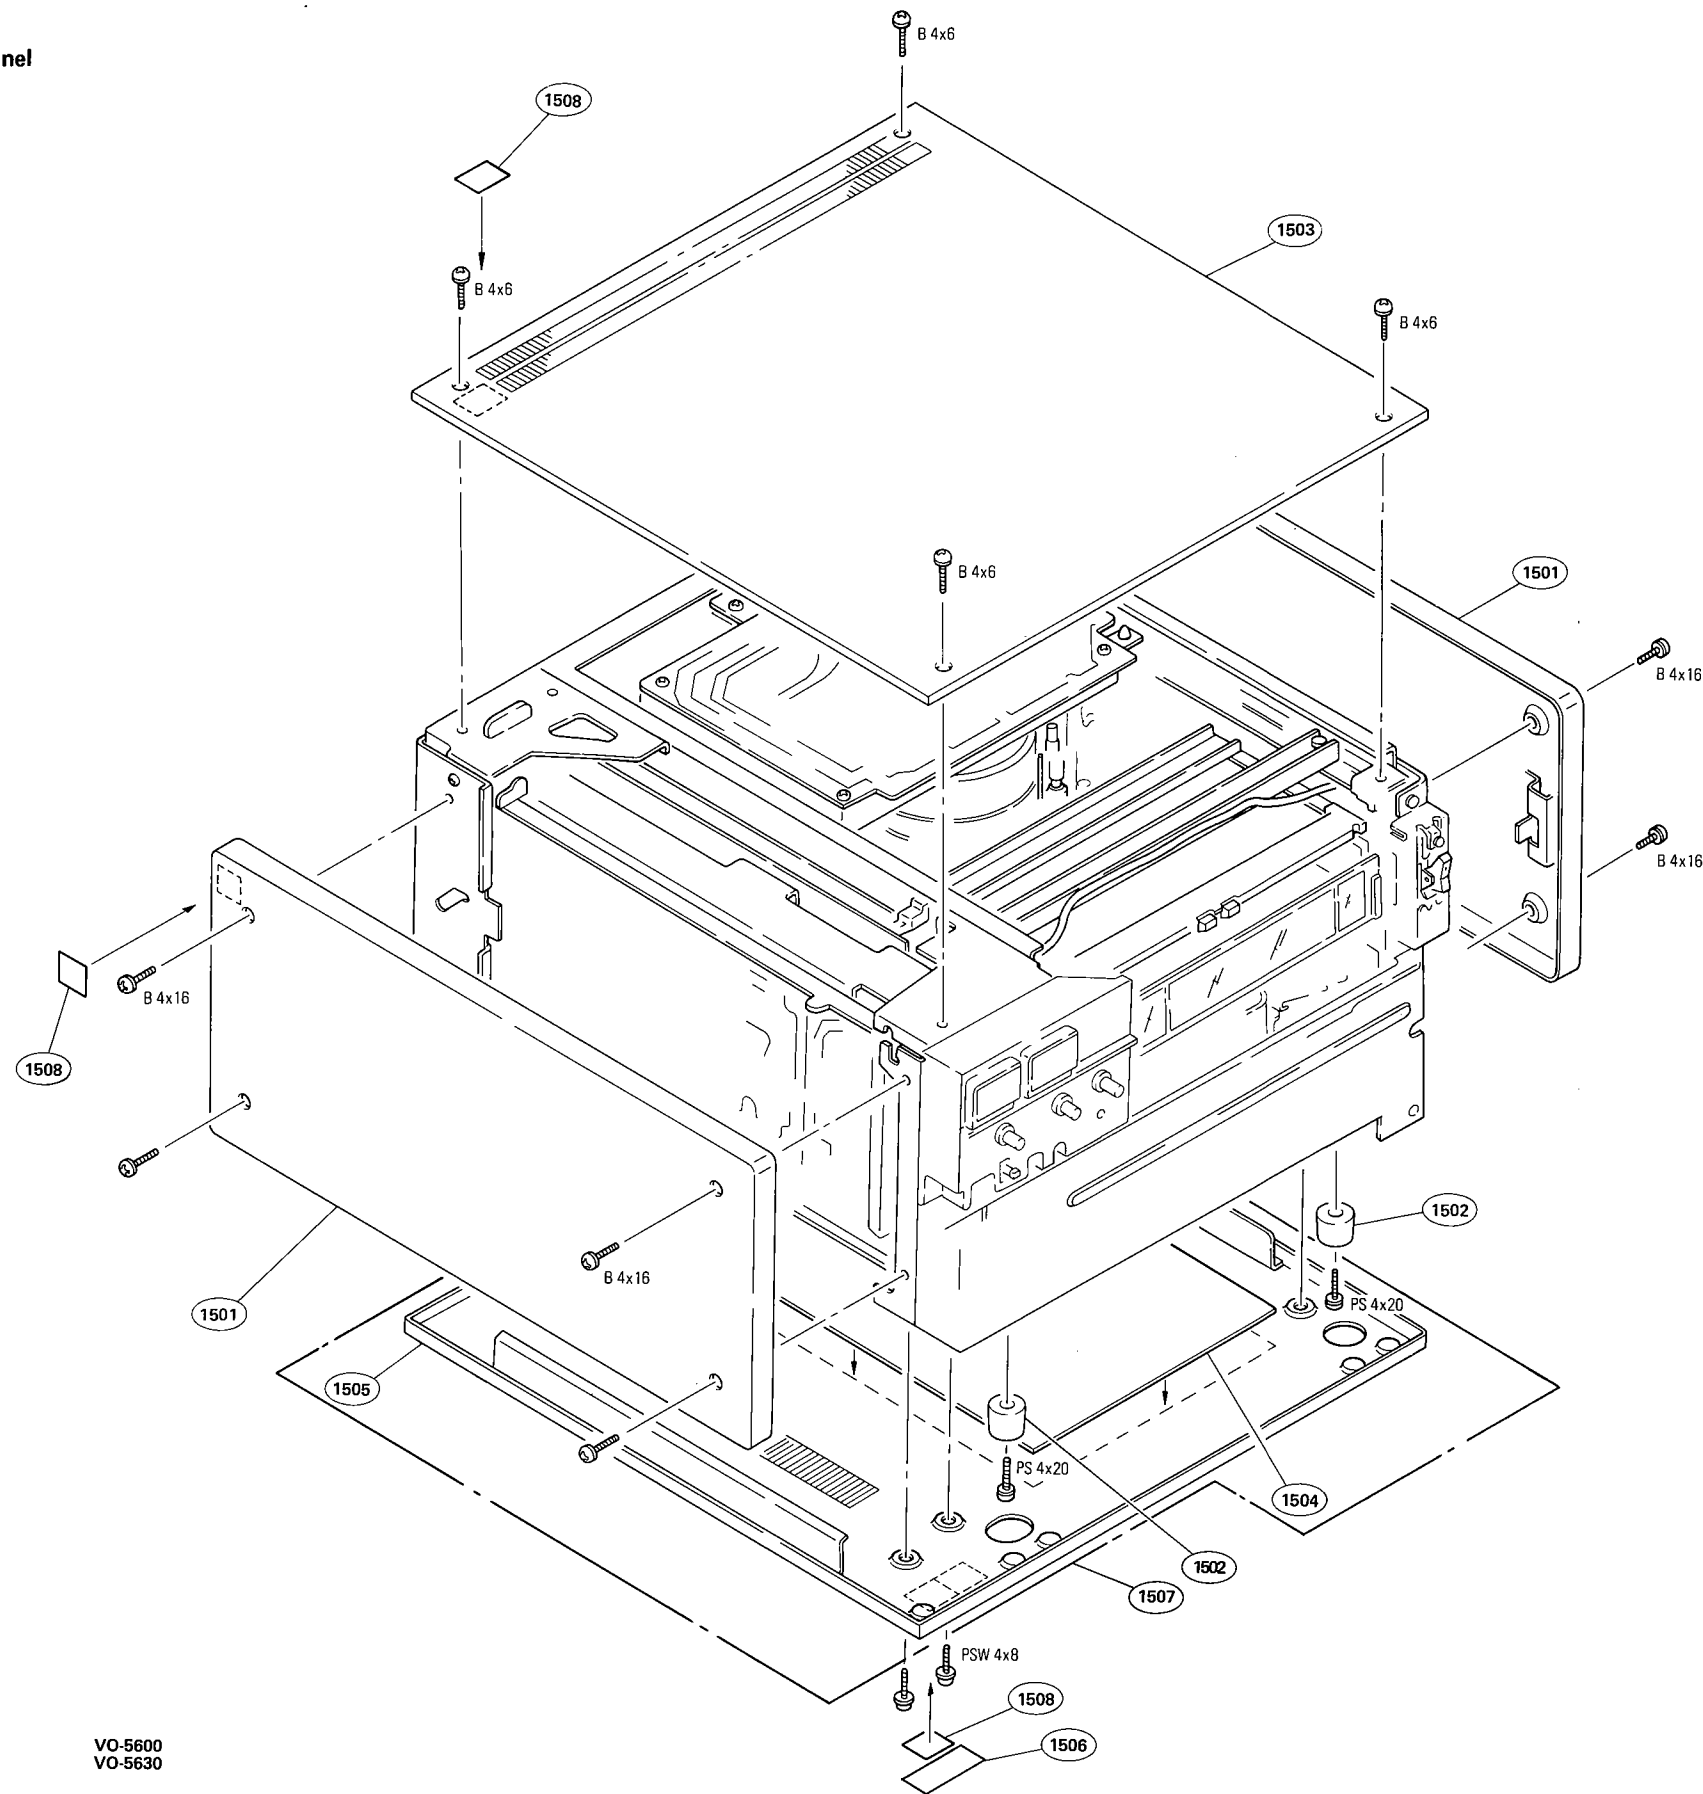

VO-5600  
VO-5630

No.	Parts No.	Description
1501	X-3668-744-0	PLATE ASS'Y, SIDE
<b>1502</b>	<b>X-4839-902-X</b>	<b>FOOT</b>
1503	3-668-940-00	PANEL, UPPER
1504	3-672-622-00	INSULATOR (A), SY (S/N UP TO 21850)
1505	3-672-644-02	PLATE, BOTTOM (S/N UP TO 21850)
1506	3-703-043-21	LABEL, CAUTION, MAIN (OLD)
1507	X-3672-609-0	PLATE ASS'Y, BOTTOM (S/N 21851 AND HIGHER)
1508	3-703-848-01	LABEL (N), SUB CAUTION (NEW)


NOTE:

- The shaded and  -marked components are critical to safety. Replace only with same components as specified.
- Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.


ORNAMENTAL PANEL (2)

ORNAMENTAL PANEL (2)


Ornamental Panel (control panel)

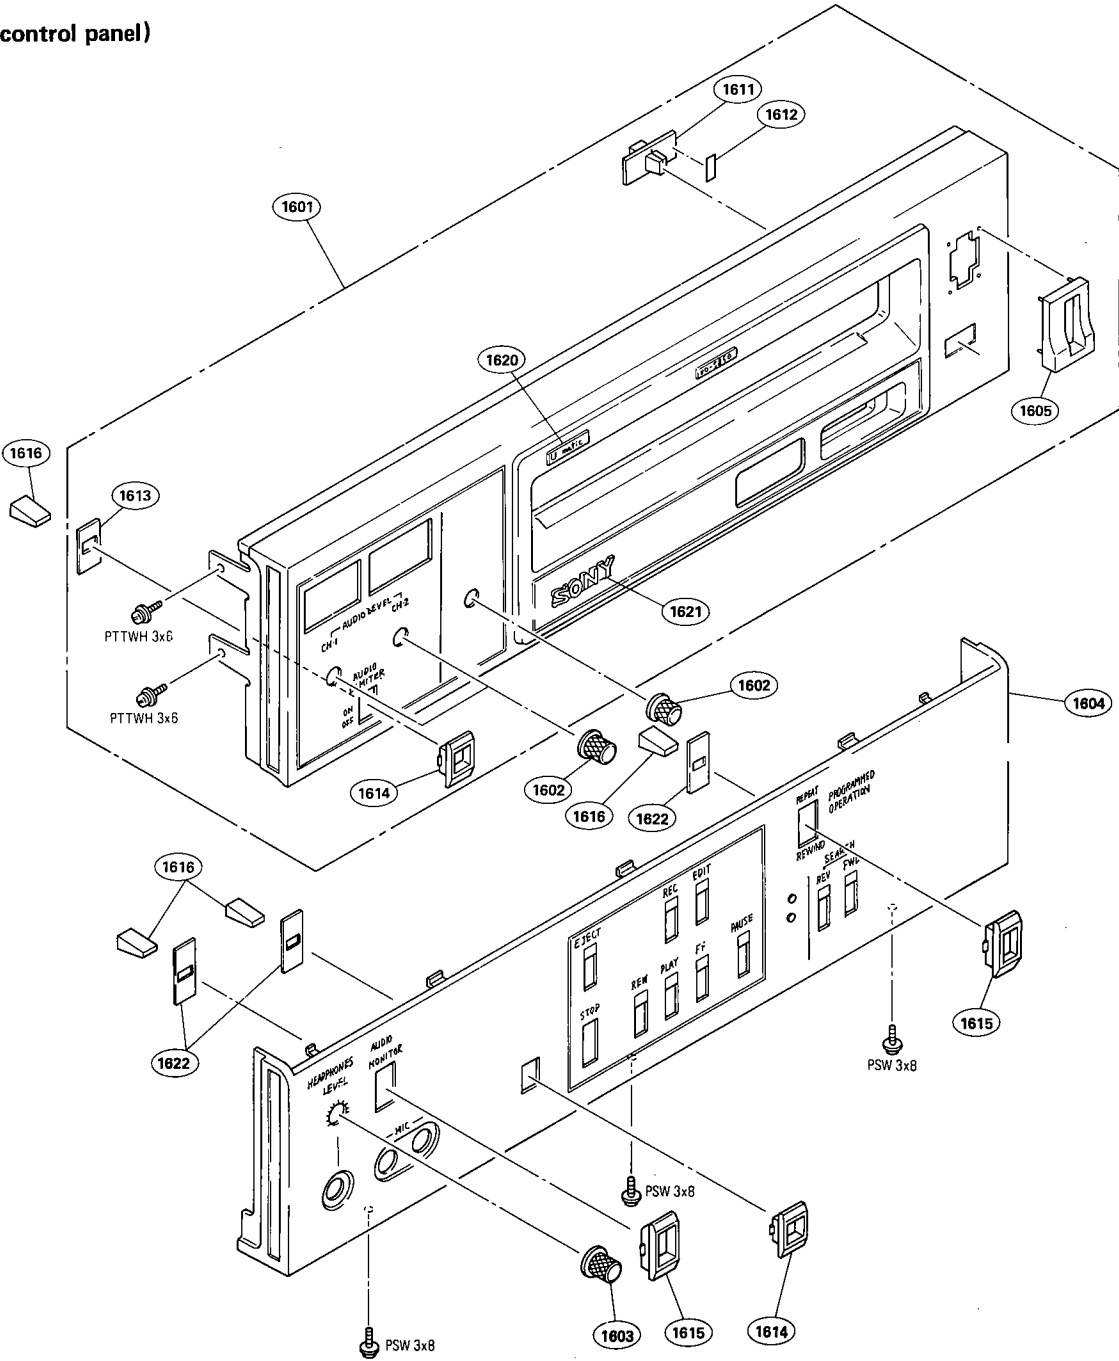


F. FWD  
PLAY  
REW  
SEARCH REV  
SEARCH FWD  
DUB/CH-1





REC



EJECT  
PAUSE



STOP

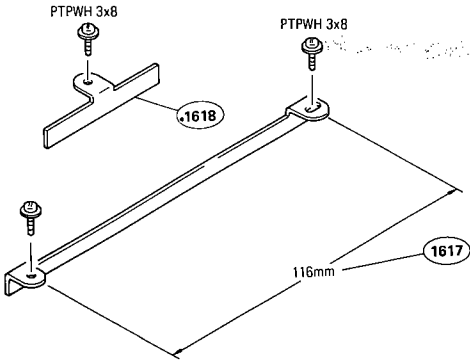


No.	Parts No.	Description
01	A-6704-082-A	PANEL (N) BLOCK ASS'Y, FRONT, VO
02	X-3661-073-0	KNOB ASS'Y, CONTROL
03	X-3668-750-0	KNOB ASS'Y, CONTROL
04	X-3672-602-3	PANEL (N) ASS'Y, KEY BOARD
05	2-251-642-00	GUARD, POWER SWITCH
06	2-284-722-01	KEY TOP (A)
07	2-284-722-11	KEY TOP (A)
08	2-284-722-21	KEY TOP (A)
09	2-284-725-00	HOLDER, KEY
10	2-284-744-00	CUSHION (B), KEY

No.	Parts No.	Description
1611	3-667-814-00	KNOB, TIMER
1612	3-667-831-00	LABEL, TIMER SWITCH
1613	3-668-015-00	PLATE (SMALL), SWITCH, LEVER
1614	3-668-016-00	FRAME (SMALL), ORNAMENTAL
1615	3-668-018-00	FRAME (MIDDLE), ORNAMENTAL
1616	3-668-028-00	KNOB (SMALL), LEVER SWITCH
1617	3-668-903-00	RETAINER (A), KEY
1618	3-668-905-00	RETAINER (C), KEY
1619	3-668-910-00	KEY TOP (STOP)
1620	3-668-913-00	LABEL, U MATIC

No.	Parts No.	Description
1621	3-668-914-00	EMBLEM, SONY
1622	3-669-909-00	PLATE, BLIND, LEVER SWITCH


NOTE:

- The shaded and  -marked components are critical to safety. Replace only with same components as specified.
- Parts printed in Bold-Face type are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.
- Item with no part number and/or no description are not stocked because they are seldom required for routine service.



# SWITCHING REGULATOR

## Switching Regulator (UR-02)

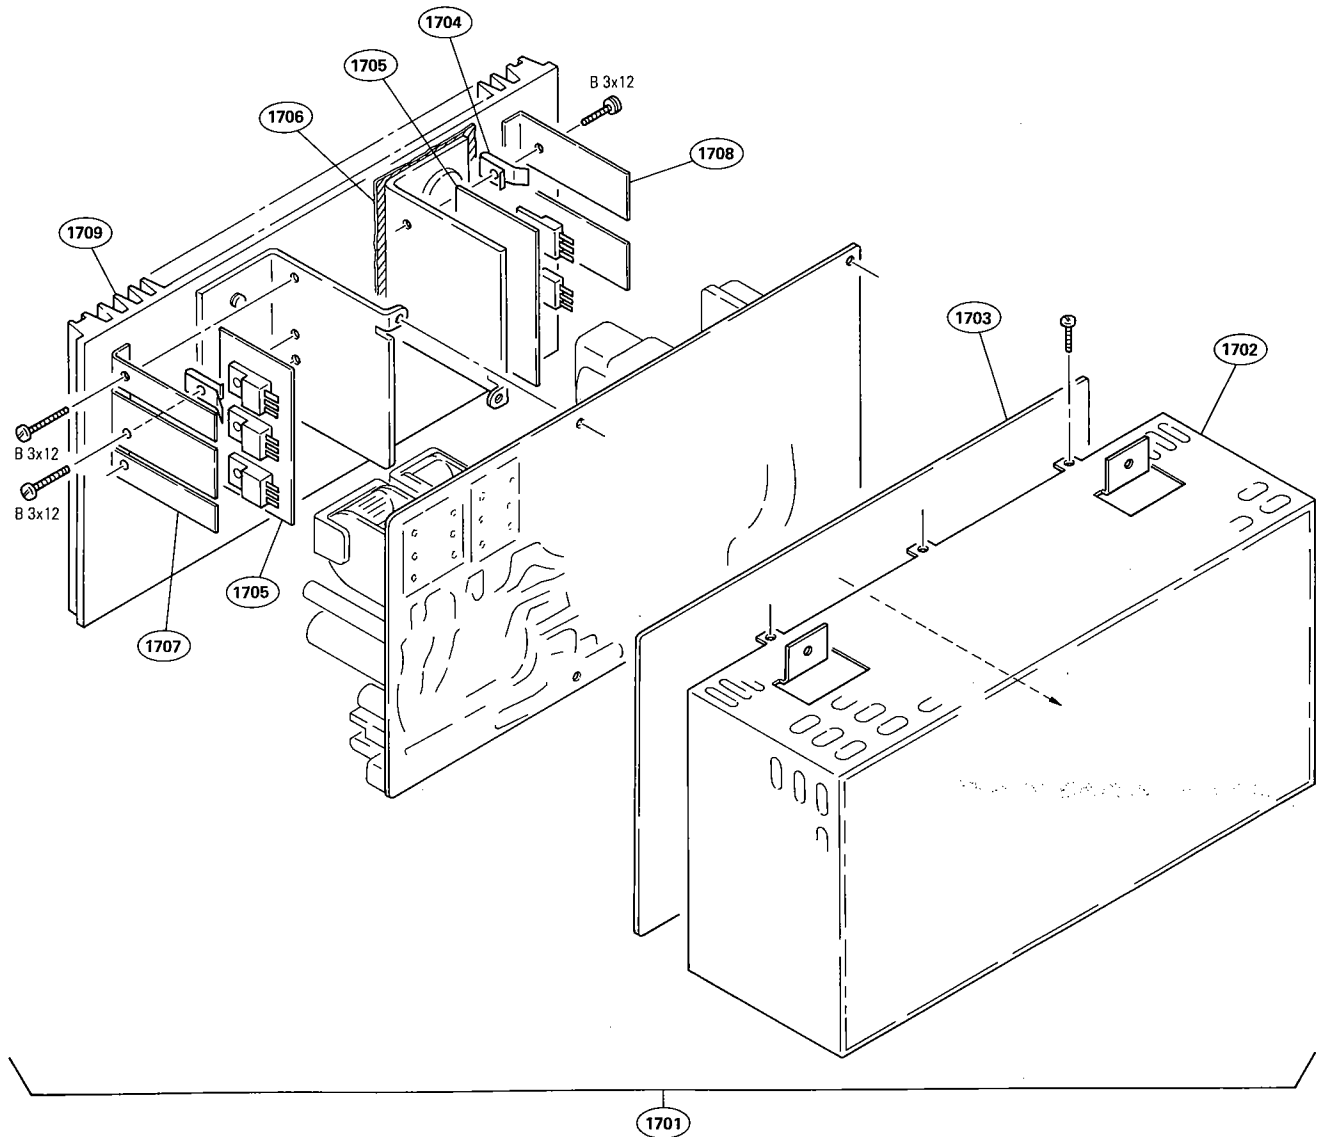

No.      Parts No.      Description

**1701      1-413-069-00      SWITCHING REGULATOR (UR-01)**

1702	2-403-440-00	CASE
1703	2-430-484-00	INSULATOR
1704	2-430-683-00	SPRING
1705	2-430-685-00	RUBBER, INSULATING
1706	2-430-686-00	RUBBER, INSULATING
1707	2-430-687-00	RETAINER, SEMICONDUCTOR
1708	2-430-688-00	RETAINER, SEMICONDUCTOR
1709	2-430-689-00	HEAT SINK

**NOTE:**

1. The shaded and -marked components are critical to safety. Replace only with same components as specified.
2. Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.
3. Item with no part number and/or no description are not stocked because they are seldom required for routine service.


### 15-3. ELECTRICAL PARTS LIST

Parts that are not listed in the "reference numbers order list" are shown in following table.

Reference numbers are omitted.

#### CERAMIC CAPACITOR

0.5 pF through 820 pF  
50WV



Value	Parts No.
0.5 pF	1-101-837-00
1	1-102-934-00
1.5	1-101-576-00
2	1-102-935-00
3	1-102-936-00
4	1-102-937-00
5	1-102-942-00
6	1-102-943-00
7	1-102-944-00
8	1-102-945-00
9	1-102-946-00
10	1-102-947-00
11	1-102-948-00
12	1-102-949-00
13	1-102-950-00
15	1-102-951-00
16	1-102-952-00
18	1-102-953-00
20	1-102-958-00
22	1-102-959-00

Value	Parts No.
24 pF	1-102-960-00
27	1-102-961-00
30	1-102-962-00
33	1-102-963-00
36	1-102-964-00
39	1-102-965-00
43	1-102-966-00
47	1-101-880-00
51	1-101-882-00
56	1-101-884-00
62	1-101-886-00
68	1-101-888-00
75	1-101-890-00
82	1-102-971-00
91	1-102-972-00
100	1-102-973-00
110	1-102-815-00
120	1-102-816-00
130	1-101-081-00
150	1-101-361-00

Value	Parts No.
160 pF	1-101-367-00
180	1-102-976-00
200	1-102-977-00
220	1-102-978-00
240	1-102-979-00
270	1-102-980-00
300	1-102-981-00
330	1-102-820-00
360	1-102-821-00
390	1-102-822-00
430	1-102-823-00
470	1-102-824-00
510	1-101-059-00
560	1-102-115-00
680	1-102-116-00
820	1-102-117-00

#### CERAMIC CAPACITOR

0.001 $\mu$ F through 0.1 $\mu$ F  
50WV




Parts NO. 1-161-□□□-00

Value	Parts No. -□□□-	Substitute
0.001 $\mu$ F	039	(1-102-074-00)
0.0012	040	
0.0015	041	
0.0018	042	
0.0022	043	(1-102-100-00)
0.0027	044	
0.0033	045	
0.0039	046	(1-102-124-00)
0.0047	047	
0.0056	048	
0.0068	049	
0.0082	050	

Value	Parts No. -□□□-	Substitute
0.01 $\mu$ F	051	(1-101-118-00)
0.012	052	
0.015	053	
0.018	054	
0.022	055	(1-101-005-00)
0.027	056	
0.033	057	
0.039	058	
0.047	059	(1-101-006-00)
0.056	060	
0.068	061	
0.082	062	
0.1	063	

# MYLAR CAPACITOR



0.001 $\mu$ F through 0.22 $\mu$ F  
 $\pm$ 5% 50WV

Parts No. 1-108-□□□-00

Value	Parts No. -□□□-
0.001 $\mu$ F	555
0.0011	556
0.0012	557
0.0013	558
0.0015	559
0.0016	560
0.0018	561
0.0020	562
0.0022	563
0.0024	564
0.0027	565
0.0030	566
0.0033	567
0.0036	568
0.0039	569


Value	Parts No. -□□□-
0.0043 $\mu$ F	570
0.0047	571
0.0051	572
0.0056	573
0.0062	574
0.0068	575
0.0075	576
0.0082	577
0.0091	578
0.01	579
0.011	580
0.012	581
0.013	582
0.015	583
0.016	584

Value	Parts No. -□□□-
0.018 $\mu$ F	585
0.020	586
0.022	587
0.024	588
0.027	589
0.030	590
0.033	591
0.036	592
0.039	593
0.043	594
0.047	595
0.051	596
0.056	597
0.062	598
0.068	599

Value	Parts No. -□□□-
0.075 $\mu$ F	600
0.082	601
0.091	602
0.1	603
0.11	604
0.12	605
0.13	606
0.15	607
0.16	608
0.18	609
0.20	610
0.22	611

# SILVERED MICA CAPACITOR

1 pF through 620 pF  
 $\pm$  5%, 50WV



Parts No. 1-107-□□□-00

Value	Parts No. -□□□-
1 pF	098
2	099
3	100
4	101
5	102
6	103
7	104
8	105
9	106
10	061
11	062
12	063
13	064


Value	Parts No. -□□□-
15 pF	065
16	066
18	067
20	068
22	069
24	070
27	071
30	072
33	073
36	074
39	075
43	076
47	077

Value	Parts No. -□□□-
51 pF	078
56	079
62	080
68	081
75	082
82	083
91	084
100	085
110	086
120	087
130	088
150	089
160	090

Value	Parts No. -□□□-
180 pF	091
200	092
220	093
240	094
270	095
300	096
330	097
360	231
390	232
430	233
470	234
510	235
560	236
620	237

## ELECTROLYTIC CAPACITOR

0.47 $\mu$ F through 470 $\mu$ F  
6.3WV through 50 (63, 100)WV



Parts No. 1-123-□□□-00


## E. PARTS

Value	Parts No. -□□□-
0.47 $\mu$ F 50V	
100	379
1 50	
100	380
2.2 50	
100	381
3.3 25	
35	
50	
100	382
4.7 25	
35	
50	
63	369
10 10	
16	
25	
35	
50	356
22 16	
25	330

Value	Parts No. -□□□-
22 $\mu$ F 35V	342
50	
63	371
33 6.3	
10	
16	318
25	
35	343
50	
63	372
47 6.3	
10	306
16	
25	332
35	
50	359
100 6.3	
10	307
16	
25	333
35	345

Value	Parts No. -□□□-
100 $\mu$ F 50V	360
220 6.3	
10	308
16	321
25	334
35	346
50	361
330 6.3	
10	309
16	322
25	335
35	347
50	362
470 6.3	298
10	310
16	323
25	336
35	348
50	
63	377

## MYLAR CAPACITOR



0.00047 $\mu$ F through 0.22 $\mu$ F  
±5% 50WV


Parts No. 1-130-□□□-00

Value	Parts No. -□□□-
0.00047 $\mu$ F	467
0.00056	468
0.00068	469
0.00082	470
0.001	471
0.0012	472
0.0015	473
0.0018	474
0.0022	475
0.0027	476
0.0033	477

Value	Parts No. -□□□-
0.0039 $\mu$ F	478
0.0047	479
0.0056	480
0.0068	481
0.0082	482
0.01	483
0.012	484
0.015	485
0.018	486
0.022	487
0.027	488


Value	Parts No. -□□□-
0.033 $\mu$ F	489
0.039	490
0.047	491
0.056	492
0.068	493
0.082	494
0.1	495
0.12	496
0.15	497
0.18	498
0.22	499

# TANTALUM CAPACITOR



0.01 $\mu$ F through 100 $\mu$ F  $\pm$  10%  
3.15V through 35V

NOTE: The value of the parts that are marked by \* in the below table are indicated by color code. (to the value with  $\pm$  20%)



Ex. BRN GRN BLU  
1 5 6

Working Voltage Color Code

15 x 10<sup>6</sup> pF = 15 $\mu$ F

BLK RED YEL GRN BLU GRY WHT  
10V 35 6.3 16 20 25 3.15

Parts No. 1-131-□□□-00

Value	Parts No. -□□□-
0.01 $\mu$	35V *396
0.015	35 *397
0.022	35 *398
0.033	35 *399
0.047	35 *400
0.068	35 *401
0.1	35 341
0.15	35 342
0.22	35 343
0.33	25 *409
	35 344
0.47	20 *412
	35 345
0.68	16 *415
	25 *410
	35 346
1.0	10 *418
	25 498

Value	Parts No. -□□□-
1.0 $\mu$	35V 347
1.5	6.3 *421
	20 499
	25 354
	35 348
2.2	3.15 *424
	16 500
	20 361
	25 355
	35 349
3.3	10 501
	16 368
	20 362
	25 356
	35 350
4.7	6.3 502
	10 375
	16 369


Value	Parts No. -□□□-
4.7 $\mu$	20V 363
	25 357
	35 351
6.8	3.15 503
	6.3 382
	10 376
	16 370
	20 364
	25 358
	35 352
10	3.15 389
	6.3 383
	10 377
	16 371
	20 365
	25 359
	35 353
15	3.15 390
	6.3 384

Value	Parts No. -□□□-
15 $\mu$	10V 378
	16 372
	20 366
	25 360
22	3.15 391
	6.3 385
	10 379
	16 373
	20 367
33	3.15 392
	6.3 386
	10 380
	16 374
47	3.15 393
	6.3 387
	10 381
68	3.15 394
	6.3 388
100	3.15 395




## CONNECTOR

top-type receptacle




3P	1-560-008-00
5P	1-560-009-00
6P	1-560-010-00
8P	1-560-011-00
10P	1-560-012-00
12P	1-560-013-00

side-type receptacle




3P	1-560-014-00
5P	1-560-015-00
6P	1-560-016-00
8P	1-560-017-00
10P	1-560-018-00
12P	1-560-019-00

housing plug contact



3P	1-561-155-00
5P	1-561-156-00
6P	1-561-157-00
8P	1-561-158-00
10P	1-561-159-00
12P	1-561-160-00




1-560-006-00  
(AWG 20 ~ 26)

1-560-007-00  
(AWG 26 ~ 30)

## MICRO INDUCTOR

1  $\mu$ H through 470  $\mu$ H  
 $\pm 5\%$




Parts No. 1-407-□□□-XX

Value	Parts No. -□□□-	Value	Parts No. -□□□-	Value	Parts No. -□□□-	Value	Parts No. -□□□-
1 $\mu$ H	178	4.7 $\mu$ H	186	22 $\mu$ H	161	100 $\mu$ H	169
1.2	179	5.6	187	27	162	120	170
1.5	180	6.8	188	33	163	150	171
1.8	181	8.2	189	39	164	180	172
2.2	182	10	157	47	165	220	173
2.7	183	12	158	56	166	270	174
3.3	184	15	159	68	167	330	175
3.9	185	18	160	82	168	390	176
						470	177

## MICRO INDUCTOR

470  $\mu$ H through 33 mH  
 $\pm 5\%$



Parts No. 1-407-□□□-00

Value	Parts No. -□□□-	Value	Parts No. -□□□-	Value	Parts No. -□□□-	Value	Parts No. -□□□-
470 $\mu$ H	488	1.5 mH	494	4.7 mH	500	15 mH	506
560	489	1.8	495	5.6	501	18	507
680	490	2.2	496	6.8	502	22	508
820	491	2.7	497	8.2	503	27	509
1 mH	492	3.3	498	10	504	33	510
1.2	493	3.9	499	12	505		



## RESISTOR

Parts that are not listed in the "reference numbers order list" are shown in following table.

Reference numbers are omitted.

CARBON RESISTOR (1/4W)

± 5%, 1/4W, non-special type  
1  $\Omega$  through 1 M $\Omega$



E. PARTS


Parts No. 1-246-□□□-00

Value	Parts No. -□□□-	Value	Parts No. -□□□-	Value	Parts No. -□□□-	Value	Parts No. -□□□-
1 $\Omega$	401	33 $\Omega$	437	1 k $\Omega$	473	33 k $\Omega$	509
1.1	402	36	438	1.1	474	36	510
1.2	403	39	439	1.2	475	39	511
1.3	404	43	440	1.3	476	43	512
1.5	405	47	441	1.5	477	47	513
1.6	406	51	442	1.6	478	51	514
1.8	407	56	443	1.8	479	56	515
2	408	62	444	2	480	62	516
2.2	409	68	445	2.2	481	68	517
2.4	410	75	446	2.4	482	75	518
2.7	411	82	447	2.7	483	82	519
3	412	91	448	3.0	484	91	520
3.3	413	100 $\Omega$	449	3.3	485	100 k $\Omega$	521
3.6	414	110	450	3.6	486	110	522
3.9	415	120	451	3.9	487	120	523
4.3	416	130	452	4.3	488	130	524
4.7	417	150	453	4.7	489	150	525
5.1	418	160	454	5.1	490	160	526
5.6	419	180	455	5.6	491	180	527
6.2	420	200	456	6.2	492	200	528
6.8	421	220	457	6.8	493	220	529
7.5	422	240	458	7.5	494	240	530
8.2	423	270	459	8.2	495	270	531
9.1	424	300	460	9.1	496	300	532
10 $\Omega$	425	330	461	10 k $\Omega$	497	330	533
11	426	360	462	11	498	360	534
12	427	390	463	12	499	390	535
13	428	430	464	13	500	430	536
15	429	470	465	15	501	470	537
16	430	510	466	16	502	510	538
18	431	560	467	18	503	560	539
20	432	620	468	20	504	620	540
22	433	680	469	22	505	680	541
24	434	750	470	24	506	750	542
27	435	820	471	27	507	820	543
30	436	910	472	30	508	910	544
						1 M $\Omega$	545



## CARBON RESISTOR (1/8W)

±5%, 1/8W, non-special type  
2.2Ω through 1MΩ



Parts No. 1-246-□□□-00

Value	Parts No. -□□□-
1Ω	-
1.1	-
1.2	-
1.3	-
1.5	-
1.6	-
1.8	-
2	-
2.2	751
2.4	812
2.7	752
3	813
3.3	753
3.6	814
3.9	754
4.3	815
4.7	755
5.1	816
5.6	756
6.2	817
6.8	757
7.5	818
8.2	758
9.1	819
10Ω	759
11	820
12	760
13	821
15	761
16	822
18	762
20	823
22	763
24	824
27	764
30	825

Value	Parts No. -□□□-
33Ω	765
36	826
39	766
43	827
47	767
51	828
56	768
62	829
68	769
75	830
82	770
91	831
100Ω	771
110	832
120	772
130	833
150	773
160	834
180	774
200	835
220	775
240	836
270	776
300	837
330	777
360	838
390	778
430	839
470	779
510	840
560	780
620	841
680	781
750	842
820	782
910	843

Value	Parts No. -□□□-
1kΩ	783
1.1	844
1.2	784
1.3	845
1.5	785
1.6	846
1.8	786
2	847
2.2	787
2.4	848
2.7	788
3.0	849
3.3	789
3.6	850
3.9	790
4.3	851
4.7	791
5.1	852
5.6	792
6.2	853
6.8	793
7.5	854
8.2	794
9.1	855
10kΩ	795
11	856
12	796
13	857
15	797
16	858
18	798
20	859
22	799
24	860
27	800
30	861

Value	Parts No. -□□□-
33kΩ	801
36	862
39	802
43	863
47	803
51	864
56	804
62	865
68	805
75	866
82	806
91	867
100kΩ	807
110	868
120	808
130	869
150	809
160	870
180	810
200	871
220	811



Parts No. 1-247-□□□-00

Value	Parts No. -□□□-
240kΩ	054
270	046
300	055
330	047
360	056
390	048
430	057
470	049
510	058
560	050
620	059
680	051
750	060
820	052
910	061
1MΩ	053



# CARBON RESISTOR (1/6W)

±5%, 1/6W, non-special type  
2.2Ω through 1MΩ



Parts No. 1-247-□□□-00

Value	Parts No. -□□□-	Value	Parts No. -□□□-	Value	Parts No. -□□□-	Value	Parts No. -□□□-
1Ω	—	36Ω	796	1.2kΩ	833	43kΩ	870
1.1	—	39	797	1.3	834	47	871
1.2	—	43	798	1.5	835	51	872
1.3	—	47	799	1.6	836	56	873
1.5	—	51	800	1.8	837	62	874
1.6	—	56	801	2	838	68	875
1.8	—	62	802	2.2	839	75	876
2	—	68	803	2.4	840	82	877
2.2	767	75	804	2.7	841	91	878
2.4	768	82	805	3	842	100kΩ	879
2.7	769	91	806	3.3	843	110	880
3	770	100Ω	807	3.6	844	120	881
3.3	771	110	808	3.9	845	130	882
3.6	772	120	809	4.3	846	150	883
3.9	773	130	810	4.7	847	160	884
4.3	774	150	811	5.1	848	180	885
4.7	775	160	812	5.6	849	200	886
5.1	776	180	813	6.2	850	220	887
5.6	777	200	814	6.8	851	240	888
6.2	778	220	815	7.5	852	270	889
6.8	779	240	816	8.2	853	300	890
7.5	780	270	817	9.1	854	330	891
8.2	781	300	818	10kΩ	855	360	892
9.1	782	330	819	11	856	390	893
10Ω	783	360	820	12	857	430	894
11	784	390	821	13	858	470	895
12	785	430	822	15	859	510	896
13	786	470	823	16	860	560	897
15	787	510	824	18	861	620	898
16	788	560	825	20	862	680	899
18	789	620	826	22	863	750	900
20	790	680	827	24	864	820	901
22	791	750	828	27	865	910	902
24	792	820	829	30	866	1MΩ	903
27	793	910	830	33	867		
30	794	1kΩ	831	36	868		
33	795	1.1	832	39	869		

## ABBREVIATIONS

Ref. No.	Description	Ref. No.	Description	Ref. No.	Description
C□□, CV□□	CAPACITOR	IC□□	IC	Q□□	TRANSISTOR
CF□□	CERAMIC FILTER	J□□	JACK	R□□, RV□□	RESISTOR
CN□□	CONNECTOR	L□□	INDUCTOR	RY□□	RELAY
D□□	DIODE	M□□	MOTOR	S□□, SW□□	SWITCH
DL□□	DELAY LINE	ME□□	METER	SB□□	SOLAR BATTERY
F□□	FUSE	MIC□□	MICROPHONE	T□□	TRANSFORMER
FB□□	FERRITE BEAD	PG□□	PG COIL	TH□□	THERMISTOR
FL□□	FILTER	PL□□	LAMP	X□□	CRYSTAL
H□□	HEAD	PM□□	SOLENOID		

All capacitors are in micro farads unless otherwise specified.

All inductors are in micro henries unless otherwise specified.

All resistors are in ohms.

Ref.No. Parts No. Description

## AC-26 BOARD

1-603-727-00 PRINTED CIRCUIT BOARD,  
AC-26  
S/N UP TO 23850

**A** C1 1-130-060-00 POLYPROPYLENE 0.1  
10% 125V

**A** CN1 1-506-371-00 2P PLUG  
1-509-910-00 2P HOUSING  
1-509-898-00 RECEPTACLE

**A** F1 1-532-268-XX 125V, 2A

**A** T1 1-421-259-00 LINE FILTER

## AC-45 BOARD

1-610-573-00 PRINTED CIRCUIT BOARD,  
AC-45  
S/N 23851 AND LATER

**A** C1 1-130-680-00 FILM 0.1 20% 125V

CN1 1-506-371-00 2P PLUG

**A** F1 1-532-268-XX 125V, 2A

**A** L1 1-421-259-00 LINE FILTER

**A** L2 1-421-604-00 CHOKE COIL

**A** L3 1-421-604-00 CHOKE COIL

## AH-3 BOARD

1-586-192-00 PRINTED CIRCUIT BOARD,  
AH-3

Ref.No. Parts No. Description

## AU-28 BOARD

**A** A-6713-122-A MOUNTED CIRCUIT BOARD,  
AU-28

All the diodes that are not listed in  
this board are 1S1555 (Parts No.  
8-719-815-55)

All the transistors that are not listed  
in this board are 2SC1364 (Parts No.  
8-729-663-47)

C10 1-107-179-00 MICA 270PF 5% 500V  
C11 1-107-178-00 MICA 240PF 5% 500V  
C29 1-107-209-00 MICA 20PF 5% 500V  
C210 1-107-178-00 MICA 240PF 5% 500V  
C211 1-107-178-00 MICA 240PF 5% 500V

C229 1-107-209-00 MICA 20PF 5% 500V  
C601 1-107-158-00 MICA 30PF 5% 500V

CP501 1-464-139-00 BIAS OSC.  
CP502 1-464-139-00 ERASE OSC.

CV501 1-141-251-00 TRIMMER 150PF x2

D7 8-719-162-07 RD6.2E  
D18 8-719-156-07 RD5.6E-B  
D20 8-719-162-07 RD6.2E  
D207 8-719-162-07 RD6.2E  
D219 8-719-156-07 RD5.6E-B

D503 8-719-200-02 10E-2  
D505 8-719-200-02 10E-2  
D507 8-719-182-07 RD8.2E  
D509 8-719-115-07 RD15E

IC1 8-759-115-83 uPC1158H2(NEC)  
IC2 8-759-115-83 uPC1158H2(NEC)  
IC3 8-759-705-58 NJM4558D-D  
(RC4558;RAYTHEON)  
IC4 8-759-705-58 NJM4558D-D  
(RC4558;RAYTHEON)  
IC201 8-759-115-83 uPC1158H2(NEC)

IC202 8-759-115-83 uPC1158H2(NEC)  
IC203 8-759-705-58 NJM4558D-D  
(RC4558;RAYTHEON)  
IC204 8-759-705-58 NJM4558D-D  
(RC4558;RAYTHEON)

IC501 8-759-240-16 TC4016BP(CD4016AE/BE;RCA)  
IC502 8-759-240-16 TC4016BP(CD4016AE/BE;RCA)

## NOTES:

1. The shaded and **A**-marked components are critical to safety.  
Replace only with same components as specified.

2. Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.

E. PARTS

## E. PARTS

Ref.No. Parts No. Description

L2 1-407-519-00 8uH  
L202 1-407-519-00 8uH

LV3 1-409-295-00 VAR, 22mH  
LV202 1-409-295-00 VAR, 22mH  
LV203 1-409-295-00 VAR, 22mH  
LV501 1-407-284-00 VAR, 1mH  
LV502 1-407-284-00 VAR, 1mH

Q1 8-761-622-00 2SC1636  
Q2 8-729-612-77 2SA1027R  
Q3 8-761-622-00 2SC1636  
Q15 8-729-103-43 2SB734  
Q201 8-761-622-00 2SC1636

Q202 8-729-612-77 2SA1027R  
Q203 8-761-622-00 2SC1636  
Q215 8-729-103-43 2SB734  
Q505 8-729-612-77 2SA1027R  
Q508 8-729-103-43 2SB734

R6 1-244-867-00 CARBON 560 5Z 1/2W  
R57 1-214-750-00 METAL 7.5K 1% 1/4W  
R58 1-214-777-00 METAL 100K 1% 1/4W  
R59 1-214-754-00 METAL 11K 1% 1/4W  
R60 1-214-726-00 METAL 750 1% 1/4W

R206 1-244-867-00 CARBON 560 5% 1/2W  
R257 1-214-750-00 METAL 7.5K 1% 1/4W  
R258 1-214-777-00 METAL 100K 1% 1/4W  
R259 1-214-754-00 METAL 11K 1% 1/4W  
R260 1-214-726-00 METAL 750 1% 1/4W

**△ R510 1-207-636-00 WIREWOUND 100 10Z 3W**

RV1 1-224-253-XX VAR, METAL 22K  
RV2 1-224-251-XX VAR, METAL 4.7K  
RV3 1-224-252-XX VAR, METAL 10K  
RV4 1-224-248-XX VAR, METAL 470  
RV5 1-224-253-XX VAR, METAL 22K

RV6 1-224-254-XX VAR, METAL 47K  
RV201 1-224-253-XX VAR, METAL 22K  
RV202 1-224-251-XX VAR, METAL 4.7K  
RV203 1-224-252-XX VAR, METAL 10K  
RV204 1-224-248-XX VAR, METAL 470

RV205 1-224-253-XX VAR, METAL 22K

RY501 1-515-476-00 12V, 280 ohm

Ref.No. Parts No. Description

### CC-9 BOARD

1-604-429-00 PRINTED CIRCUIT BOARD,  
CC-9

### CC-10 BOARD

1-604-430-00 PRINTED CIRCUIT BOARD,  
CC-10

IC1 8-719-104-42 PS4005(NEC)

### CC-11 BOARD

1-604-431-00 PRINTED CIRCUIT BOARD,  
CC-11

IC1 8-719-104-42 PS4005(NEC)

### CN-42 BOARD

1-606-379-00 PRINTED CIRCUIT BOARD,  
CN-42

### DC-13 BOARD

1-606-378-11 PRINTED CIRCUIT BOARD,  
DC-13

1-517-072-00 HOLDER, LAMP

D1 8-719-815-55 1S1555

**△ F1 1-532-403-XX 125V, 3.15A**

**△ F2 1-532-348-00 125V, 2A**

Q1 8-729-663-48 2SC1364

RV1 1-224-251-XX VAR, METAL 4.7K

### NOTES:

- The shaded and **△**-marked components are critical to safety.  
Replace only with same components as specified.

- Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.

Ref.No. Parts No. Description

**DR-17 BOARD**

**A** A-6715-138-A MOUNTED CIRCUIT BOARD,  
DR-17

D1 8-719-200-02 10E-2  
D2 8-719-200-02 10E-2  
D3 8-719-200-02 10E-2  
D4 8-719-200-02 10E-2  
D51 8-719-911-55 U05G

**A** F1 1-532-349-XX 125V, 4A

Q1 8-729-663-47 2SC1364  
Q2 8-729-663-47 2SC1364  
Q3 8-729-384-48 2SA844  
Q4 8-729-382-63 2SC1826-Y  
Q5 8-729-377-12 2SA771

Q6 8-729-377-12 2SA771  
Q7 8-729-382-63 2SC1826-Y  
Q8 8-729-384-48 2SA844  
Q9 8-729-663-47 2SC1364  
Q10 8-729-663-47 2SC1364

Q51 8-729-663-47 2SC1364  
Q52 8-729-377-12 2SA771  
Q53 8-729-377-12 2SA771

**A** R51 1-207-621-00 WIREWOUND 1.5 10% 2W

**EC-19 BOARD**

1-603-729-00 PRINTED CIRCUIT BOARD,  
EC-19

**FR-11 BOARD**

1-603-585-00 PRINTED CIRCUIT BOARD,  
FR-11

IC1 8-719-104-42 PS4005(NEC)  
IC2 8-719-104-42 PS4005(NEC)

Ref.No. Parts No. Description

**HP-6 BOARD**

1-606-366-00 PRINTED CIRCUIT BOARD,  
HP-6

CN1 1-507-553-00 JACK "HEADPHONES"

**KY-21 BOARD**

A-6728-398-A MOUNTED CIRCUIT BOARD,  
KY-21

D1 8-719-904-55 GL-5HD5  
D2 8-719-904-55 GL-5HD5  
D3 8-719-904-55 GL-5HD5  
D4 8-719-904-55 GL-5HD5  
D5 8-719-904-55 GL-5HD5

D6 8-719-904-55 GL-5HD5  
D7 8-719-904-55 GL-5HD5

PL1 1-518-262-00 PILOT 5V, 60mA  
PL2 1-518-262-00 PILOT 5V, 60mA  
PL3 1-518-262-00 PILOT 5V, 60mA  
PL4 1-518-262-00 PILOT 5V, 60mA

Q1 8-729-178-54 2SC2785  
Q2 8-729-178-54 2SC2785  
Q3 8-729-117-54 2SA1175  
Q4 8-729-178-54 2SC2785  
Q5 8-729-178-54 2SC2785

Q6 8-729-178-54 2SC2785  
Q7 8-729-178-54 2SC2785

RV1 1-228-218-00 VAR, CARBON 500/500

**NOTES:**

1. The shaded and **A**-marked components are critical to safety.  
Replace only with same components as specified.

2. Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.

E. PARTS

# KY-21, LM-9, MC-14, MI-5, MR-8

## E. PARTS

Ref.No.	Parts No.	Description
S1	1-516-963-00	SLIDE "AUDIO MONITOR"
S2	1-516-995-00	SLIDE "REPEAT"
S3	1-553-003-00	SLIDE "INPUT SELECT"
S5	1-552-539-00	KEY "STOP"
S6	1-552-539-00	KEY "EJECT"
S7	1-552-539-00	KEY "F FWD"
S8	1-552-539-00	KEY "PLAY"
S9	1-552-539-00	KEY "REW"
S10	1-552-539-00	KEY "FWDx5"
S11	1-532-539-00	KEY "REVx5"
S12	1-532-539-00	KEY "PAUSE"
S13	1-532-539-00	KEY "REC"
S14	1-532-539-00	KEY "DUB"
T1	1-427-284-00	OUTPUT
T2	1-427-284-00	OUTPUT

### LM-9 BOARD

1-606-377-00 PRINTED CIRCUIT BOARD,  
LM-9

### MC-14 BOARD

1-603-735-00 PRINTED CIRCUIT BOARD,  
MC-14

RV1	1-226-395-00	VAR, CARBON 20K
RV2	1-226-395-00	VAR, CARBON 20K
RV3	1-226-983-00	VAR, CARBON 100K

PL1	1-518-462-00	PILOT, 12V, 55mA
PL2	1-518-462-00	PILOT, 12V, 55mA


S1	1-553-003-00	SLIDE "AUDIO LIMITER"
----	--------------	-----------------------

### MI-5 BOARD

1-606-381-00 PRINTED CIRCUIT BOARD,  
MI-5


CN1 )	1-507-733-00	2 PIN JACK "MIC IN"
CN2 )		

### NOTES:

1. The shaded and -marked components are critical to safety.  
Replace only with same components as specified.

Ref.No. Parts No. Description

**MR-8 BOARD** S/N UP TO 28150

 A-6725-256-A MOUNTED CIRCUIT BOARD,  
MR-8

All the diodes that are not listed in this board are 1S1555 (Parts No. 8-719-815-55)

All the transistors that are not listed in this board are 2SC1364 (Parts No. 8-729-663-47)

C1	1-131-358-00	TANTALUM 6.8 10% 25V
C3	1-131-358-00	TANTALUM 6.8 10% 25V
C12	1-131-358-00	TANTALUM 6.8 10% 25V

D2	8-719-200-02	10E-2
D3	8-719-200-02	10E-2
D4	8-719-200-02	10E-2
D8	8-719-200-02	10E-2
D9	8-719-200-02	10E-2

D10	8-719-200-02	10E-2
D14	8-719-200-02	10E-2
D15	8-719-200-02	10E-2
D16	8-719-200-02	10E-2
D19	8-719-200-02	10E-2

D20	8-719-200-02	10E-2
D21	8-719-200-02	10E-2
D23	8-719-200-02	10E-2
D24	8-719-200-02	10E-2
D25	8-719-200-02	10E-2

D26	8-719-200-02	10E-2
D27	8-719-200-02	10E-2
D28	8-719-200-02	10E-2
D29	8-719-200-02	10E-2

IC1	8-759-135-80	uPC358C(LM358JG;TI)
-----	--------------	---------------------

Q2	8-729-103-43	2SB734
Q4	8-729-177-43	2SD774
Q6	8-729-103-43	2SB734
Q9	8-729-177-43	2SD774
Q12	8-729-103-43	2SB734

2. Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.



Ref.No. Parts No. Description

Q14 8-729-177-43 2SD774  
 Q16 8-729-103-43 2SB734  
 Q19 8-729-177-43 2SD774  
 Q21 8-729-199-80 2SD998  
 Q22 8-729-811-11 2SD1111

Q24 8-729-199-80 2SD998  
 Q25 8-729-811-11 2SD1111  
 Q28 8-729-199-80 2SD998  
 Q31 8-729-384-48 2SA844  
 Q32 8-729-384-48 2SA844

Q42 8-729-177-43 2SD774  
 Q43 8-729-889-40 2SD894

R47 1-210-859-00 CARBON 1.2 5% 1/8W  
 R50 1-210-859-00 CARBON 1.2 5% 1/8W  
 R56 1-210-859-00 CARBON 1.2 5% 1/8W

**A** R101 1-207-674-00 WIREWOUND 4.7 10% 6W

RV1 1-224-251-XX VAR, METAL 4.7K  
 RV2 1-224-251-XX VAR, METAL 4.7K  
 RV3 1-224-253-XX VAR, METAL 22K

**MR-11A BOARD 28151 AND LATER**

**A** A-6725-357-A MOUNTED CIRCUIT BOARD,  
 MR-11A

All the diodes that are not listed in  
 this board are 1S1555.(Parts No.  
 8-719-815-55)

All the transistors that are not listed  
 in this board are 2SC1364.(Parts No.  
 8-729-663-47)

D1 8-719-200-02 10E-2  
 D2 8-719-200-02 10E-2  
 D3 8-719-200-02 10E-2  
 D4 8-719-200-02 10E-2  
 D31 8-719-200-02 10E-2

D32 8-719-200-02 10E-2  
 D33 8-719-200-02 10E-2  
 D34 8-719-200-02 10E-2  
 D35 8-719-200-02 10E-2  
 D36 8-719-200-02 10E-2  
 D37 8-719-200-02 10E-2

Ref.No. Parts No. Description

IC2 8-759-135-80 uPC358C(LM358JG;TI)  
 IC3 8-759-240-66 TC4066BP(CD4066AE/BE;RCA)  
 IC4 8-759-240-69 TC4069UBP(CD4069UBE;RCA)  
 IC5 8-759-645-17 M5A517P(MITSUBISHI)  
 IC7 8-759-240-01 TC4001BP(CD4001AE/BE;RCA)  
 IC8 8-759-600-24 M5A543L(MITSUBISHI)  
 IC9 8-759-600-24 M5A543L(MITSUBISHI)

Q1 8-729-900-37 DTC124EF  
 Q2 8-729-900-37 DTC124EF  
 Q3 8-729-900-37 DTC124EF  
 Q4 8-729-900-37 DTC124EF  
 Q5 8-729-900-37 DTC124EF

Q6 8-729-900-37 DTC124EF  
 Q7 8-729-900-37 DTC124EF  
 Q8 8-729-900-37 DTC124EF  
 Q9 8-729-900-37 DTC124EF  
 Q10 8-729-900-37 DTC124EF

Q11 8-729-900-37 DTC124EF  
 Q12 8-729-900-37 DTC124EF  
 Q13 8-729-900-37 DTC124EF  
 Q25 8-729-177-43 2SD774  
 Q26 8-729-889-40 2SD894

Q27 8-729-663-47 2SC1364  
 Q28 8-729-663-47 2SC1364  
 Q31 8-729-199-80 2SD998  
 Q32 8-729-811-11 2SD1111  
 Q33 8-729-663-47 2SC1364

Q34 8-729-199-80 2SD998  
 Q35 8-729-811-11 2SD1111  
 Q36 8-729-663-47 2SC1364  
 Q37 8-729-663-47 2SC1364  
 Q38 8-729-199-80 2SD998

Q39 8-729-663-47 2SC1364  
 Q40 8-729-663-47 2SC1364

**A** R63 1-210-859-00 CARBON 1.2 5% 1/8W  
**A** R73 1-210-859-00 CARBON 1.2 5% 1/8W  
**A** R83 1-210-859-00 CARBON 1.2 5% 1/8W  
**A** R91 1-207-674-00 WIREWOUND 4.7 10% 6W

RV1 1-224-251-XX VAR, METAL 4.7K  
 RV2 1-224-251-XX VAR, METAL 4.7K  
 RV4 1-224-252-XX VAR, METAL 10K

**NOTES:**

1. The shaded and **A**-marked components are critical to safety.  
 Replace only with same components as specified.

2. Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.

Ref.No. Parts No. Description

## PD-16A BOARD

**A** A-6717-250-A MOUNTED CIRCUIT BOARD,  
PD-16A

### E. PARTS

D4 8-719-200-02 10E-2  
D5 8-719-200-02 10E-2  
D6 8-719-200-02 10E-2  
D7 8-719-200-02 10E-2  
D8 8-719-200-02 10E-2  
  
D9 8-719-200-02 10E-2  
D10 8-719-200-02 10E-2  
D11 8-719-200-02 10E-2  
D12 8-719-200-02 10E-2  
D13 8-719-200-02 10E-2  
  
D14 8-719-200-02 10E-2  
D15 8-719-200-02 10E-2  
D16 8-719-904-55 GL-5HD5

Q4 8-729-811-11 2SD1111  
Q5 8-729-663-47 2SC1364  
Q6 8-729-199-80 2SD998  
Q7 8-729-811-11 2SD1111  
Q8 8-729-663-47 2SC1364

Q9 8-729-199-80 2SD998  
Q10 8-729-811-11 2SD1111  
Q11 8-729-663-47 2SC1364  
Q12 8-729-199-80 2SD998  
Q13 8-729-811-11 2SD1111

Q14 8-729-663-47 2SC1364  
Q15 8-729-199-80 2SD998

**A** R8 1-247-072-00 CARBON 1.2 5% 1/4W

**A** R15 1-247-072-00 CARBON 1.2 5% 1/4W

**A** R19 1-247-072-00 CARBON 1.2 5% 1/4W

**A** R23 1-247-072-00 CARBON 1.2 5% 1/4W

### NOTES:

- The shaded and **A**-marked components are critical to safety.  
Replace only with same components as specified.

Ref.No. Parts No. Description

## PH-4 BOARD

1-603-589-00 PRINTED CIRCUIT BOARD,  
PH-4

IC1 1-806-232-11 MB-1102 "TENSION REGULATOR"

## PH-5 BOARD

1-603-737-00 PRINTED CIRCUIT BOARD,  
PH-5

D1 8-719-951-04 BR5104S

Q1 8-729-810-22 SPS102

## PT-9 BOARD

1-605-018-00 PRINTED CIRCUIT BOARD,  
PT-9

Q1 8-729-377-13 2SA771-Y

## SV-44 BOARD

**A** A-6715-137-A MOUNTED CIRCUIT BOARD,  
SV-44

All the diodes that are not listed in this board are 1SS119 (Parts No. 8-719-911-19)

All the transistors that are not listed in this board are 2SC1364 (Parts No. 8-729-663-47)

C37 1-123-311-00 ELECT 1000 20% 10V  
C54 1-130-224-00 POLYPROPYLENE 0.015 5% 50V  
C74 1-127-468-00 ELECT 0.22 5% 16V

D36 8-719-709-25 1S1925-P

- Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.

Ref.No.	Parts No.	Description
IC1	8-759-240-13	TC4013BP(TOSHIBA)
IC2	8-759-240-11	TC4011BP(CD4011AE/BE;RCA)
IC3	8-759-132-40	uPC324C(LM324;NSC)
IC4	8-759-240-25	TC4025BP(CD4025AE/BE;RCA)
IC6	8-751-941-05	CX194B-5(SONY)
IC7	8-759-240-53	TC4053BP(CD4053BE;RCA)
IC8	8-759-135-80	uPC358C(LM358JG;TI)
IC10	8-759-132-40	uPC324C(LM324;NSC)
IC11	8-759-240-01	TC4001BP(CD4001AE/BE;RCA)
IC15	8-759-132-40	uPC324C(LM324;NSC)
IC16	8-759-240-53	TC4053BP(CD4053BE;RCA)
IC17	8-759-240-30	TC4030BP(CD4030AE/BE;RCA)
IC18	8-759-745-50	NJM4558D-DS (RC4558;RAYTHEON)
IC19	8-759-145-58	uPC4558C(RC4558;RAYTHEON)
IC20	8-759-240-81	TC4081BP(CD4081BE;RCA)
IC21	8-759-045-84	MC14584BCP(MOTOROLA)
IC22	8-759-132-40	uPC324C(LM324;NSC)
IC23	8-759-240-11	TC4011BP(CD4011AE/BE;RCA)
IC24	8-759-240-23	TC4023BP(CD4023AE/BE;RCA)
IC25	8-759-240-01	TC4001BP(CD4001AE/BE;RCA)
IC26	8-759-240-30	TC4030BP(CD4030AE/BE;RCA)
IC27	8-759-240-11	TC4011BP(CD4011AE/BE;RCA)
IC28	8-759-240-81	TC4081BP(CD4081BE;RCA)
IC29	8-759-240-24	TC4024BP(CD4024AE/BE;RCA)
IC30	8-759-240-53	TC4053BP(CD4053BE;RCA)

Q7	8-729-384-48	2SA844
Q10	8-729-384-48	2SA844
Q14	8-761-622-00	2SC1636
Q25	8-729-384-48	2SA844
Q26	8-729-177-43	2SD774
Q27	8-761-622-00	2SC1636

**R14** 1-207-636-00 WIREWOUND 100 10% 3W

**R35** 1-207-636-00 WIREWOUND 100 10% 3W

R76	1-214-160-00	METAL 15K 1% 1/4W
R128	1-212-710-00	METAL 220K 1% 1/2W
R193	1-214-178-00	METAL 82K 1% 1/4W

**R258** 1-207-636-00 WIREWOUND 100 10% 3W

Ref.No. Parts No. Description

**R287** 1-207-636-00 WIREWOUND 100 10% 3W

RV1	1-224-254-XX	VAR, METAL 47K
RV3	1-224-254-XX	VAR, METAL 47K
RV6	1-224-252-XX	VAR, METAL 10K
RV7	1-224-252-XX	VAR, METAL 10K
RV8	1-224-254-XX	VAR, METAL 47K
RV9	1-224-249-XX	VAR, METAL 1K
RV10	1-224-255-XX	VAR, METAL 100K
RV11	1-224-252-XX	VAR, METAL 10K
RV12	1-224-250-XX	VAR, METAL 2.2K
RV13	1-224-250-XX	VAR, METAL 2.2K
RV14	1-224-252-XX	VAR, METAL 10K
RV16	1-224-248-XX	VAR, METAL 470

#### SW-43 BOARD

1-603-434-00 PRINTED CIRCUIT BOARD,  
SW-43

IC1 8-719-104-42 PS4005(NEC)

#### SW-46 BOARD

1-603-590-00 PRINTED CIRCUIT BOARD,  
SW-46

IC1 8-719-104-42 PS4005(NEC)

#### SW-50 BOARD

1-603-435-00 PRINTED CIRCUIT BOARD,  
SW-50

IC1 8-719-104-42 PS4005(NEC)

E. PARTS

#### NOTES:

- The shaded and **A**-marked components are critical to safety.  
Replace only with same components as specified.

- Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in Bold-Face type will be processed, but allow for additional delivery time.

Ref. No	Parts No.	Description
---------	-----------	-------------

**SY-75 BOARD**

A-6717-249-C

MOUNTED CIRCUIT BOARD,  
SY-75

S/N UP TO 18450



A-6717-249-D

MOUNTED CIRCUIT BOARD,  
SY-75

S/N 18451 AND LATER

All the diodes that are not listed in this board  
are 1S1555 (Parts No. 8-719-815-55)

All the transistors that are not listed in this  
board are 2SC1364 (Parts No. 8-729-663-47)

*C50	1-161-021-00	CERAMIC 0.047 10% 25V
C114	1-161-019-00	CERAMIC 0.033 10% 25V
D404	8-719-200-02	10E-2
IC1	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC2	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC3	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC4	8-759-645-29	M54529P (MITSUBISHI)
*IC4	8-759-201-08	TD62302P (TOSHIBA)
IC5	8-759-145-58	μPC4558C (R4558; RAYTHEON)
IC6	8-759-240-69	TC4069UBP (CD4069UBE; RCA)
IC7	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC8	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC9	8-759-600-39	M54529P (MITSUBISHI)
IC10	8-759-645-29	M54529P (MITSUBISHI)
IC11	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC12	8-759-240-11	TC4011BP (CD4011AE/BE; RCA)
IC13	8-759-240-71	TC4071BP (CD4071BE; RCA)
IC14	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC15	8-759-645-19	M54519P (MITSUBISHI)
IC16	8-759-240-11	TC4011BP (CD4011AE/BE; RCA)
IC17	8-759-240-71	TC4071BP (CD4071BE; RCA)
IC18	8-759-240-73	TC4073BP (CD4073BE; RCA)
IC19	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC20	8-759-240-81	TC4081BP (CD4081BE; RCA)

Ref. No.	Parts No.	Description
----------	-----------	-------------

IC21	8-759-240-11	TC4011BP (CD4011AE/BE; RCA)
IC22	8-759-240-69	TC4069UBP (CD4069UBE; RCA)
IC23	8-759-145-58	μPC4558C (RC4558; RAYTHEON)
*IC23	8-759-240-20	TC4020BP (CD4020BE; RCA)
IC24	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC25	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC26	8-759-240-71	TC4071BP (CD4071BE; RCA)
IC27	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC28	8-759-240-69	TC4069UBP (CD4069UBE; RCA)
IC29	8-759-045-38	MC14538BCP (MOTOROLA)
IC30	8-759-240-69	TC4069UBP (CD4069UBE; RCA)
*IC30	8-759-045-84	MC14584BCP (MOTOROLA)
IC31	8-759-240-69	TC4069UBP (CD4069UBE; RCA)
IC32	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC33	8-759-240-75	TC4075BP (CD4075BE; RCA)
IC34	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC35	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC36	8-757-570-00	CX-757 (SONY)
IC37	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC38	8-759-240-25	TC4025BP (CD4025AE/BE; RCA)
IC39	8-759-240-30	TC4030BP (CD4030BE; RCA)
IC40	8-759-045-84	MC14584BCP (MOTOROLA)
IC41	8-759-240-73	TC4073BP (CD4073BE; RCA)
IC42	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC43	8-759-240-11	TC4011BP (CD4011AE/BE; RCA)
IC44	8-759-645-29	M54529P (MITSUBISHI)
*IC44	8-759-201-08	TD62302P (TOSHIBA)
IC45	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC46	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC47	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC48	8-759-240-11	TC4011BP (CD4011AE/BE; RCA)
IC49	8-759-729-03	NJM2903D (JRC)
IC50	8-759-745-50	NJM4558D-DS (RC4558; RAYTHEON)
IC51	8-759-645-29	M54529P (MITSUBISHI)
*IC51	8-759-145-58	μPC4558C (RC4558; RAYTHEON)
IC52	8-759-240-69	TC4069UBP (CD4069UBE; RCA)
IC53	8-759-240-12	TC4012BP (CD4012AE/BE; RCA)
IC54	8-759-240-11	TC4011BP (CD4011AE/BE; RCA)
IC55	8-759-240-13	TC4013BP (TOSHIBA)
IC56	8-759-240-69	TC4069UBP (CD4069UBE; RCA)
IC57	8-759-645-29	M54529P (MITSUBISHI)
*IC57	8-759-045-38	MC14538BCP (MOTOROLA)
IC58	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC59	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC60	8-759-240-81	TC4081BP (CD4081BE; RCA)

\*S/N 18451 AND LATER

## NOTES:

- The shaded and -marked components are critical to safety.  
Replace only with same components as specified.

- Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.

Ref.No.	Parts No.	Description
IC61	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC62	8-759-240-69	TC4069UBP (CD4069UBE; RCA)
IC63	8-759-240-71	TC4071BP (CD4071BE; RCA)
IC64	8-759-645-29	M54529P (MITSUBISHI)
*IC64	8-759-201-08	TD62302P (TOSHIBA)
IC65	8-759-645-29	M54529P (MITSUBISHI)
*IC65	8-759-201-08	TD62302P (TOSHIBA)
IC66	8-759-045-84	MC14584BCP (MOTOROLA)
*IC66	8-759-240-69	TC4069UBP (CD4069UBE; RCA)
IC67	8-759-645-29	M54529P (MITSUBISHI)
IC68	8-759-240-11	TC4011BP (CD4011AE/BE; RCA)
IC69	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC70	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC71	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC72	8-759-240-13	TC4013BP (TOSHIBA)
IC73	8-759-240-73	TC4073BP (CD4073BE; RCA)
IC74	8-759-245-20	TC4520BP (MC14520BCP; MOTOROLA)
IC75	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC76	8-759-645-29	M54529P (MITSUBISHI)
*IC76	8-759-201-08	TD62302P (TOSHIBA)
IC77	8-759-240-81	TC4081BP (CD4081BE; RCA)
IC78	8-759-240-25	TC4025BP (CD4025AE/BE; RCA)
IC79	8-759-240-69	TC4069UBP (CD4069UBE; RCA)
IC80	8-759-240-01	TC4001BP (CD4001AE/BE; RCA)
IC81	8-759-240-11	TC4011BP (CD4011AE/BE; RCA)
*IC81	8-759-240-81	TC4081BP (CD4081BE; RCA)
Q1	8-729-384-48	2SA844
Q7	8-729-384-48	2SA844
Q13	8-729-384-48	2SA844
Q21	8-729-177-32	2SD773
*Q21	8-729-382-64	2SC1826
Q405	8-729-384-48	2SA844
*Q410	8-729-384-48	2SA844

**A** R236 1-207-619-00 WIREWOUND 0.82 10% 3W

RV2 1-224-253-XX VAR, METAL 22K

\*S/N 18451 AND LATER

#### NOTES:

1. The shaded and **A**-marked components are critical to safety.  
Replace only with same components as specified.

Ref.No. Parts No. Description

#### VO-9 BOARD

**A** A-6711-325-A MOUNTED CIRCUIT BOARD,  
VO-9

1-607-619-00 PRINTED CIRCUIT BOARD,  
DS-14

All the diodes that are not listed in this board are 1S1555 (Parts No. 8-719-815-55)

C67	1-123-311-00	ELECT 1000 20% 10V
C68	1-123-311-00	ELECT 1000 20% 10V
C79	1-107-202-00	MICA 10PF 5% 500V
C80	1-107-205-00	MICA 13PF 5% 500V
C108	1-107-208-00	MICA 18PF 5% 500V
C112	1-107-206-00	MICA 15PF 5% 500V
C134	1-131-404-00	TANTALUM 0.22 10% 25V
C157	1-107-158-00	MICA 30PF 5% 500V
C191	1-107-211-00	MICA 24PF 5% 500V
C322	1-131-408-00	TANTALUM 1 10% 25V
C324	1-131-408-00	TANTALUM 1 10% 25V
C401	1-107-209-00	MICA 20PF 5% 500V
C431	1-107-202-00	MICA 10PF 5% 500V
C438	1-107-208-00	MICA 18PF 5% 500V
C602	1-107-206-00	MICA 15PF 5% 500V
C614	1-107-159-00	MICA 33PF 5% 500V
C617	1-107-208-00	MICA 18PF 5% 500V
C618	1-107-208-00	MICA 18PF 5% 500V
C623	1-107-047-00	MICA 5.6PF 0.5PF 500V
C624	1-107-047-00	MICA 5.6PF 0.5PF 500V
CV1	1-141-246-00	TRIMMER 20PF
CV2	1-141-244-00	TRIMMER 7PF
CV3	1-141-244-00	TRIMMER 7PF
D6	8-719-139-07	RD3.9E-B
D302	8-719-815-59	1S1555-S
D604	8-719-127-07	RD2.7E-B

DL1	1-415-231-00	0.3us S/N UP TO 32950
DL1	1-415-231-21	0.3us S/N 32951 AND LATER
DL3	1-415-133-00	1H


FL1	1-235-002-00	LPF
FL3	1-235-044-00	LPF
FL5	1-231-294-00	BPF
		S/N UP TO 32950
FL5	1-231-294-31	BPF
		S/N 32951 AND LATER

2. Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.

## E. PARTS

Ref.NO.	Parts NO.	Description	Ref.No.	Parts No.	Description
IC1	8-758-050-00	CX-805(SONY)	Q29	8-724-375-01	2SC403C
IC2	8-751-880-00	CX-188(SONY)	Q30	8-724-375-01	2SC403C
IC3	8-759-240-11	TC4011BP(CD4011AE/BE;RCA)	Q31	8-724-375-01	2SC403C
IC4	8-759-240-01	TC4001BP(CD4001AE/BE;RCA)	Q32	8-724-375-01	2SC403C
IC6	8-759-601-87	CX-187(SONY)	Q33	8-724-375-01	2SC403C
IC7	8-759-200-60	TA7060AP (TOSHIBA)	Q34	8-724-375-01	2SC403C
IC8	8-751-340-00	CX-134A(SONY)	Q35	8-724-375-01	2SC403C
			Q36	8-724-375-01	2SC403C
			Q37	8-724-375-01	2SC403C
			Q38	8-724-375-01	2SC403C
L10	1-420-984-00	RF	Q39	8-724-375-01	2SC403C
			Q40	8-724-375-01	2SC403C
LV1	1-411-103-00	BPT-4	Q41	8-724-375-01	2SC403C
LV2	1-411-104-00	BPT-5	Q42	8-724-375-01	2SC403C
LV3	1-411-100-00	BPT-1	Q43	8-761-622-00	2SC1636
LV4	1-425-785-31	BURST AMP			
LV5	1-411-107-00	PEAKING	Q44	8-729-384-48	2SA844
			Q45	8-724-375-01	2SC403C
LV6	1-411-107-00	PEAKING	Q46	8-724-375-01	2SC403C
LV7	1-407-267-00	VAR, 1mH	Q47	8-724-375-01	2SC403C
LV8	1-407-237-00	VAR, 15	Q48	8-724-375-01	2SC403C
Q1	8-724-375-01	2SC403C	Q49	8-729-384-48	2SA844
Q2	8-724-375-01	2SC403C	Q50	8-765-212-30	2SA925-23
Q3	8-729-663-47	2SC1364	Q51	8-729-384-48	2SA844
Q4	8-729-384-48	2SA844	Q52	8-729-384-48	2SA844
Q5	8-729-384-48	2SA844	Q53	8-724-375-01	2SC403C
Q6	8-761-622-00	2SC1636	Q54	8-724-375-01	2SC403C
Q7	8-724-375-01	2SC403C	Q55	8-729-384-48	2SA844
Q8	8-724-375-01	2SC403C	Q56	8-724-375-01	2SC403C
Q9	8-724-375-01	2SC403C	Q57	8-724-375-01	2SC403C
Q10	8-724-375-01	2SC403C	Q58	8-724-375-01	2SC403C
Q11	8-729-663-47	2SC1364	Q59	8-724-375-01	2SC403C
Q12	8-729-663-47	2SC1364	Q60	8-724-375-01	2SC403C
Q13	8-729-384-48	2SA844	Q61	8-724-375-01	2SC403C
Q15	8-729-663-47	2SC1364	Q62	8-761-622-00	2SC1636
Q16	8-724-375-01	2SC403C	Q63	8-724-375-01	2SC403C
Q17	8-729-663-47	2SC1364	Q64	8-724-375-01	2SC403C
Q19	8-724-375-01	2SC403C	Q65	8-761-622-00	2SC1636
Q21	8-729-663-47	2SC1364	Q66	8-761-622-00	2SC1636
Q22	8-724-375-01	2SC403C	Q67	8-761-622-00	2SC1636
Q23	8-724-375-01	2SC403C	Q68	8-765-423-00	2SK152-3
Q24	8-729-384-48	2SA844	Q69	8-765-423-00	2SK152-3
Q25	8-729-103-43	2SB734	Q70	8-729-663-47	2SC1364
Q26	8-729-103-43	2SB734	Q71	8-724-375-01	2SC403C
Q27	8-724-375-01	2SC403C	Q72	8-724-375-01	2SC403C
Q28	8-724-375-01	2SC403C	Q73	8-724-375-01	2SC403C
			Q74	8-729-384-48	2SA844
			Q75	8-724-375-01	2SC403C
			Q76	8-729-663-47	2SC1364
			Q77	8-729-663-47	2SC1364
			Q78	8-724-375-01	2SC403C

## NOTES:

1. The shaded and  -marked components are critical to safety.  
Replace only with same components as specified.

2. Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.

Ref.No. Parts No. Description

Q79 8-724-375-01 2SC403C  
 Q80 8-724-375-01 2SC403C  
 Q81 8-729-663-47 2SC1364  
 Q82 8-729-663-47 2SC1364  
 Q83 8-729-663-47 2SC1364

R335 1-214-091-00 METAL 20 1% 1/4W  
 R336 1-214-091-00 METAL 20 1% 1/4W  
 R338 1-214-091-00 METAL 20 1% 1/4W  
 R339 1-214-091-00 METAL 20 1% 1/4W

**⚠ R353 1-206-479-00 METAL 47 5% 2W**

R354 1-211-405-00 NF CARBON 6.8 5% 1/8W  
 R370 1-244-861-00 CARBON 330 5% 1/2W

**⚠ R407 1-206-640-00 METAL 100 5% 2W**

R627 1-211-409-00 NF CARBON 10 5% 1/8W  
 R640 1-244-865-00 CARBON 470 5% 1/2W

RV1 1-244-251-XX VAR, METAL 4.7K  
 RV2 1-224-251-XX VAR, METAL 4.7K  
 RV3 1-224-251-XX VAR, METAL 4.7K  
 RV4 1-224-253-XX VAR, METAL 22K  
 RV5 1-224-254-XX VAR, METAL 47K

RV6 1-224-250-XX VAR, METAL 2.2K  
 RV7 1-224-251-XX VAR, METAL 4.7K  
 RV8 1-224-134-XX VAR, METAL 470K  
 RV9 1-224-252-XX VAR, METAL 10K  
 RV10 1-224-251-XX VAR, METAL 4.7K

RV11 1-224-250-XX VAR, METAL 2.2K  
 RV12 1-224-251-XX VAR, METAL 4.7K  
 RV13 1-224-251-XX VAR, METAL 4.7K  
 RV14 1-224-249-XX VAR, METAL 1K  
 RV15 1-224-251-XX VAR, METAL 4.7K

RV16 1-224-251-XX VAR, METAL 4.7K  
 RV17 1-224-550-21 VAR, METAL 220  
 RV18 1-224-250-XX VAR, METAL 2.2K  
 RV19 1-224-550-21 VAR, METAL 220  
 RV20 1-224-250-XX VAR, METAL 2.2K

RV21 1-224-250-XX VAR, METAL 2.2K  
 RV22 1-224-250-XX VAR, METAL 2.2K  
 RV23 1-224-250-XX VAR, METAL 2.2K  
 RV24 1-224-251-XX VAR, METAL 4.7K  
 RV25 1-224-255-XX VAR, METAL 100K

RV26 1-224-250-XX VAR, METAL 2.2K  
 RV27 1-224-249-XX VAR, METAL 1K

Ref.No. Parts No. Description

T1 1-426-017-00 AF  
 T2 1-427-472-00 OUTPUT  
 T3 1-427-472-00 OUTPUT  
 T4 1-426-018-00 AF  
 T5 1-426-018-00 AF

X1 1-527-376-00 OSC. 3.579545MHz

## FRAME

**⚠ 1-413-069-00 SWITCHING REGULATOR (UR-01)**

**⚠ CN1001 1-534-517-41 CORD, POWER**

CN1002) 1-507-142-XX JACK 2P  
 CN1003) "AUDIO LINE IN"

CN1004 1-507-251-XX JACK JM-35 M-10  
 "AUDIO MONITOR"

CN1005) 1-507-142-XX JACK 2P  
 CN1006) "AUDIO LINE OUT"

CN1007 1-507-473-XX JACK JM-35 M-7A  
 "RX-DATA"

CN1008 1-562-261-00 RECEPTACLE BNC  
 "VIDEO LINE IN"

CN1009 1-562-261-00 RECEPTACLE BNC  
 "VIDEO LINE OUT"

CN1010 1-561-583-00 RECEPTACLE 33P FEMALE  
 "REMOTE"

CN1011 1-561-280-00 RECEPTACLE, 10P FEMALE  
 "RF MOD"

CN1012 1-507-410-21 F RECEPTACLE  
 "RF OUT"

CN1013 1-561-671-00 RECEPTACLE, 8P FEMALE  
 "TV"

1-561-671-00 CONTACT

## NOTES:

1. The shaded and **⚠**-marked components are critical to safety.  
 Replace only with same components as specified.

2. Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.

NAME

## E, UR-01 (PW-67)

E. PARTS

Ref.No.	Parts No.	Description
CS1001	1-586-633-00	CONDENSATION SENSOR
H1001	A-6709-136-A	DRUM ASSY, UPPER RV-5
H1002	8-829-358-31	EPP15-5803B "AUDIO RP/ERASE, CTL R/P"
H1003	8-825-513-20	EPP170-58 "CTL PB/FULL ERASE"
M1001	A-6709-396-A	HEAD DRUM ASSY, DUH-20BR
M1002	8-838-019-01	BHF-1600A "CAPSTAN"
M1003	8-835-056-01	DNR-1002 "THREADING"
M1004	8-835-047-01	DNR-4000A "REEL"
M1005	8-835-055-01	DNR-4700A "CASSETTE COMPARTMENT"
ME1001	1-520-393-00	AUDIO CH-1
ME1002	1-520-393-00	AUDIO CH-2
PL1001	1-518-455-00	12V, 55mA "CASSETTE COMPARTMENT"
PL1002	1-518-455-00	12V, 55mA "CASSETTE COMPARTMENT"
PM1001	1-454-283-00	12V, 80 ohm "SKEW"
PM1002	1-454-284-00	12V, 10/90 ohm "SEARCH"
PM1003	1-454-286-00	12V, 6/35 ohm "PINCH"
PM1004	1-454-285-00	12V, 8/52 ohm "TAKE UP IDLER"
PM1005	1-454-284-00	12V, 10/90 ohm "TAKE UP BRAKE"
PM1006	1-454-284-00	12V, 10/90 ohm "SUPPLY BRAKE"
PM1007	1-454-285-00	12V, 8/52 ohm "SUPPLY IDLER"
<b>A</b> S1001	1-553-515-00	ROCKER "POWER"
S1002	Y-2041-017-5	COUNTER
S1003	1-553-789-00	SLIDE "TIMER"
S1004	1-516-779-XX	SLIDE "REMOTE SELECT"

Ref.No. Parts No. Description  
SWITCHING REGULATOR

**A** 1-413-069-00 UR-01

## PW-67 BOARD

1-604-137-00 PRINTED CIRCUIT BOARD,  
PW-67

C101 1-130-398-00 POLYPROPYLENE 1200PF 600V

**A** C102 1-130-610-00 POLYPROPYLENE 0.1 125V

**A** C103 1-161-746-00 CERAMIC 1000PF 10% 125V

**A** C104 1-161-746-00 CERAMIC 1000PF 10% 125V

C107 1-130-579-00 CERAMIC 0.01 10% 630V

C108 1-125-240-00 ELECT 470 200V

C109 1-125-240-00 ELECT 470 200V

C110 1-123-659-00 ELECT 47 250V

C111 1-123-659-00 ELECT 47 250V

C209 1-123-326-00 ELECT 3300 20% 16V

C210 1-123-326-00 ELECT 3300 20% 16V

C211 1-123-326-00 ELECT 3300 20% 16V

C212 1-123-326-00 ELECT 3300 20% 16V

**A** 1-560-036-00 6P CN TO CN PIN

**A** CN101 1-560-437-00 4P PLUG "AC IN"  
1-561-427-00 4P HOUSING  
1-561-432-00 CONTACT

CN201 1-560-438-00 5P PLUG "DC OUT"  
1-561-428-00 5P HOUSING  
1-561-432-00 CONTACT

D101 8-719-834-10 SM3G-41  
D102 8-719-911-55 U05G  
D103 8-719-911-55 U05G  
D104 8-719-900-94 V09E  
D105 8-719-182-26 RD8.2E-B3Z

D106 8-719-162-07 RD6.2E-B  
D107 8-719-815-85 1S1585  
D108 8-719-815-85 1S1585  
D201 8-719-903-02 ESAC33-02C  
D202 8-719-903-02 ESAC33-02C

## NOTES:

- The shaded and **A**-marked components are critical to safety.  
Replace only with same components as specified.

- Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.



Ref.No. Parts No. Description

D203 8-719-903-02 ESAC33-02C  
 D204 8-719-200-02 10E-2  
 D205 8-719-115-07 RD15E-B  
 D206 8-719-923-48 1S2348H

**⚠** F101 1-532-603-00 125V, 7A, 145°C

**⚠** L101 1-459-215-00 120

**⚠** L102 1-459-215-00 120

L201 1-421-398-12 200  
 L202 1-421-431-00 CHOKE  
 L203 1-421-370-00 CHOKE

Q101 8-729-962-52 2SC2625  
 Q102 8-729-962-52 2SC2625  
 Q103 1-806-095-11 2SC2534  
 Q104 8-729-177-43 2SD774  
 Q201 8-729-331-53 2SC2315

R101 1-205-622-00 CEMENT 33 5W  
 R102 1-205-711-00 CEMENT 15 5W  
 R103 1-244-933-00 CARBON 330K 1/2W  
 R104 1-244-933-00 CARBON 330K 1/2W  
 R105 1-202-727-00 SOLID 4.7M 1/2W

R107 1-247-090-00 CARBON 20 1/4W  
 R108 1-247-090-00 CARBON 20 1/4W  
 R109 1-247-091-00 CARBON 22 1/4W  
 R113 1-247-123-00 CARBON 470 1/4W  
 R115 1-247-123-00 CARBON 470 1/4W

R201 1-205-622-00 CEMENT 33 5W  
 R202 1-205-627-00 CEMENT 0.015 5W  
 R205 1-247-090-00 CARBON 20 1/4W

**⚠** T101 1-446-911-00 MAIN CONVERTER

**⚠** T102 1-421-430-00 LFT

**⚠** T103 1-437-085-00 DRIVE

**⚠** T104 1-446-912-00 SUB CONVERTER

T201 1-421-432-00 CHOKE

Ref.No. Parts No. Description

## PW-68 BOARD

1-604-138-00 PRINTED CIRCUIT BOARD,  
PW-68

C301 1-130-652-00 POLYPROPYLENE 0.0036 10%  
100V  
 C302 1-108-859-00 MYLAR 1500PF 20% 50V  
 C305 1-130-349-00 POLYPROPYLENE 0.1 10% 100V

D301 8-719-200-02 10E-2  
 D302 8-719-115-07 RD15E

IC301 8-759-904-94 TL494CN

Q301 8-729-612-77 2SA1027R

R302 1-247-104-00 CARBON 75 1/4W

RV301 1-226-826-00 VAR, METAL 300

E. PARTS

## NOTES:

1. The shaded and **⚠**-marked components are critical to safety.  
Replace only with same components as specified.

2. Parts printed in **Bold-Face type** are normally stocked for replacement purposes. The remaining parts shown in this manual are not normally required for routine service work. Orders for parts not shown in **Bold-Face type** will be processed, but allow for additional delivery time.

## 15-4. PACKING MATERIAL AND ACCESSORY (SUPPLIED)

3-672-645-00 CARTON, INDIVIDUAL  
 3-672-714-00 CUSHION  
 3-672-715-00 CUSHION  
 3-672-716-00 CUSHION  
 3-672-717-00 CUSHION  
  
 3-672-720-00 BAG, (FOR VO-5600)  
 3-701-630-00 BAG, POLY (FOR MANUAL)  
 ⚠ 3-783-819-22 MANUAL, INSTRUCTION  
 3-795-287-21 CARD, INSTRUCTION

## 15-5. FIXTURE (OPTIONAL)

J-6001-820-A DRUM ECCENTRICITY GAUGE (3)  
 J-6001-830-A DRUM ECCENTRICITY GAUGE (2)  
 J-6001-840-A DRUM ECCENTRICITY GAUGE (1)  
 J-6001-930-A DRUM ECCENTRICITY GAUGE (4)  
 J-6080-013-A DIHEDRAL ADJUSTING SCREW  
  
 J-6009-830-A FLATNESS PLATE  
 J-6130-010-A REEL TABLE HEIGHT CHECK  
 BASE JIG  
 J-6130-020-A REEL TABLE HEIGHT CHECK JIG  
 J-6150-020-A PINCH LEVER ADJUSTMENT JIG  
 Y-2031-001-0 CLEANING FLUID  
  
 2-034-697-00 CLEANING PIECE  
 3-702-215-01 TORQUE MEASUREMENT TAPE  
 (100 mm DIA.)  
 3-702-216-01 BACK TENSION ADJUSTMENT JIG  
 7-661-018-01 SONY OIL  
 7-732-050-20 TENSION SCALE (50 g FULL  
 SCALE)  
  
 7-732-050-30 TENSION SCALE (100 g FULL  
 SCALE)  
 7-732-050-40 TENSION SCALE (200 g FULL  
 SCALE)  
 7-732-050-50 TENSION SCALE (500 g FULL  
 SCALE)  
 8-960-015-04 ALIGNMENT TAPE, RR5-3SA  
 9-911-053-00 THICKNESS GAUGE

Standard products Head Demagnetizer, HE-4